


100⁺ years of

L ADERSHIP

Low Voltage Control Products

Price List w.e.f. 15th November 2022

SIEMENS

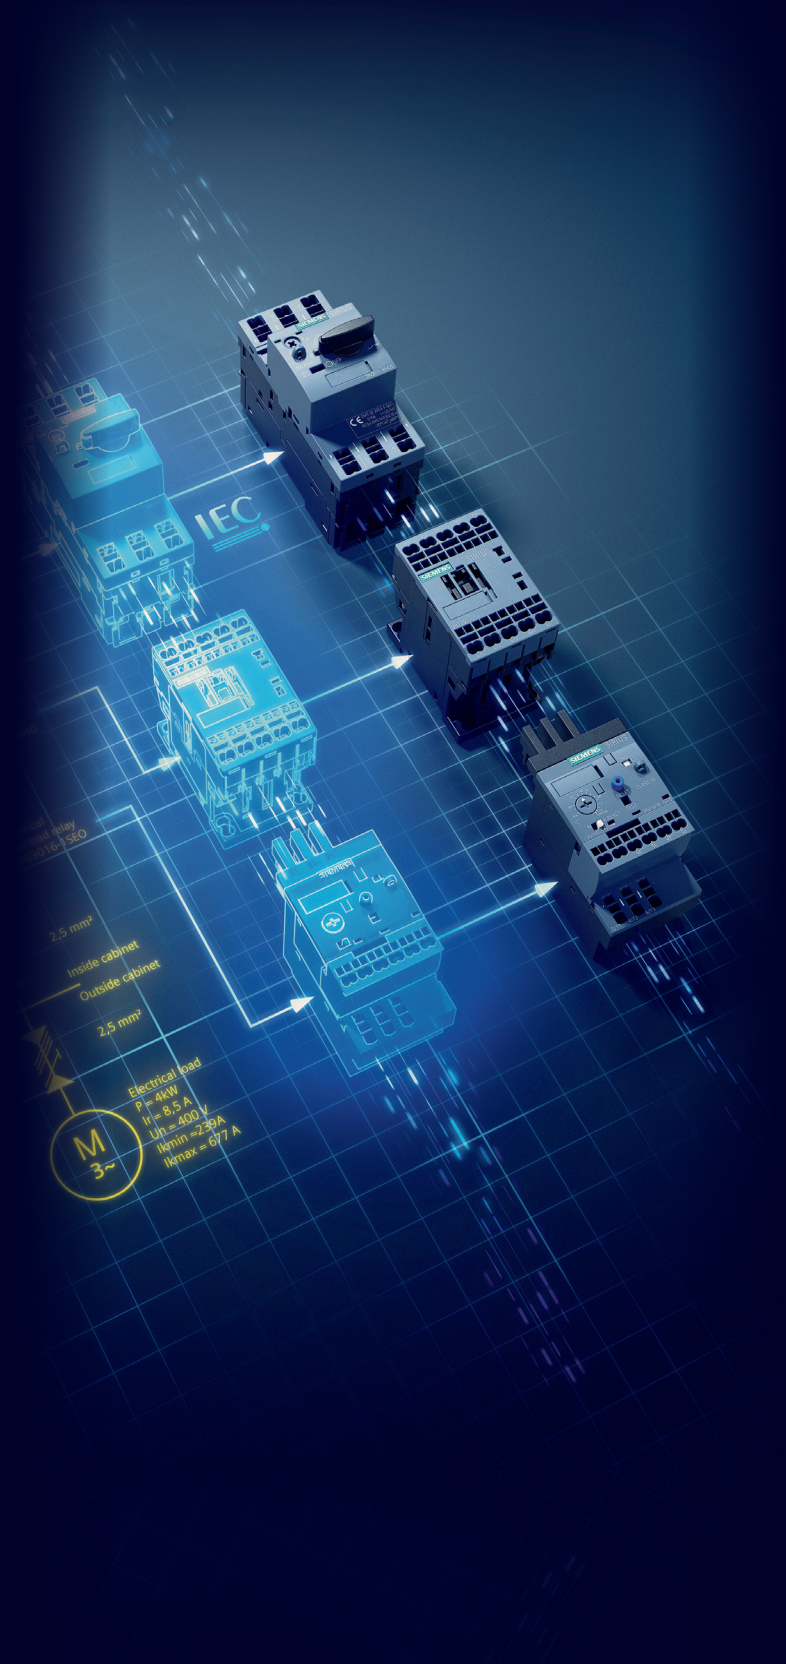




Save up to

30%

more space using compact switching devices



Seamlessly import configuration data and save up to

80%

of time with SIRIUS product data



Switching to spring-loaded technology saves **time** and **money**



Tested Combinations

Our pre-tested and pre-assembled switching devices save **time** and **effort** for **configuring, ordering** and **assembly**.



Modular Build

Ordering and storing becomes up to

30%

more economical with the SIRIUS Modular System




Worldwide Use

Time savings of up to

25%

using the **universally applicable** SIRIUS Modular System

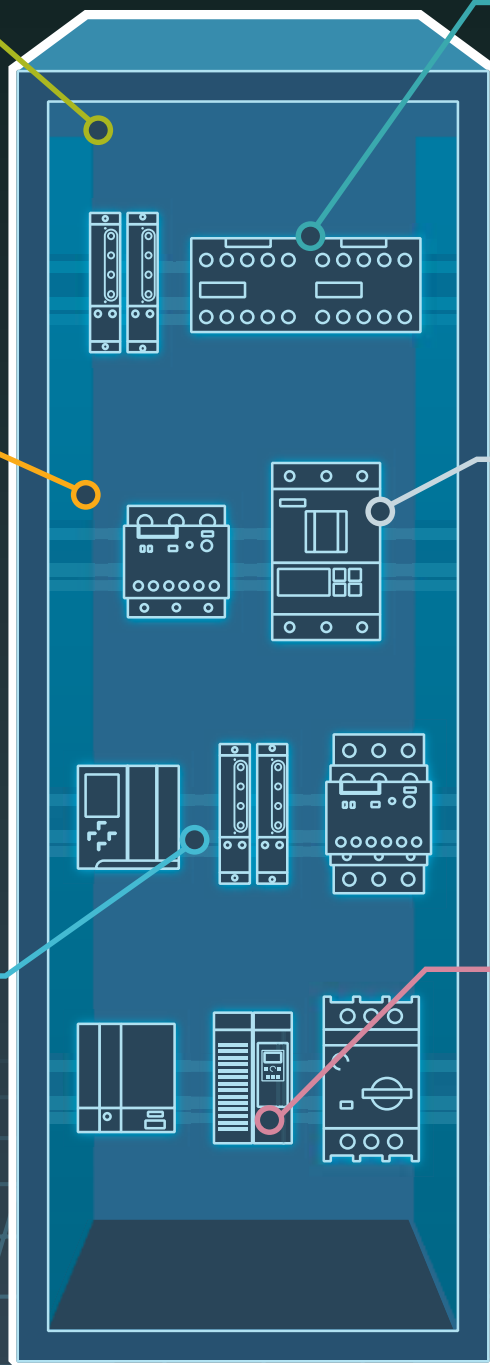

SIRIUS Modular System

The perfect combination

www.siemens.com/sirius

SIEMENS


Index

Contents	Page No.
1 Switching Devices	
Contactor Relays - 3RH2 (S00)	5
Latched Contactor Relays (S00)	5
Contactor Relays - 3RH2 (S00) (with Low power consumption coil)	5
Power Contactors - 3RT (S00 to S12)	6
Power Contactors - 3RT (S6 to S12) (with separate coils)	7
Power Contactors - 3RT2 (S0)	7
Energy Efficient Contactors	8
Power Contactors - 3RT20 coupling relays (PLC interface relay)	9
Vacuum Contactors - 3RT12/ 3TF6	10
Power Contactors - 3RT with indication of Remaining LifeTime (RLT)	10
3 Pole AC1 Duty Contactors - 3RT24 & 3RT14	11
4 Pole Power Contactors (4NO main contacts) 3RT23 & 3RT13	11
4 Pole Power Contactors (2NO+2NC main contacts) 3RT25	11
Large Contactors 3RT148	12
Power Contactors with Fail-safe input	13
Communication capable Power Contactors	14
Solid state switching devices - 3RF	15
Auxiliary contact blocks for 3RT/3RH	15
Accessories for 3RT2 and 3RH2 Contactors (S00 to S3)	16
Accessories for 3 Pole 3RT2 & 3RT1 Contactors (S6 to S12)	19
Accessories for 4 Pole Contactor - 3RT23, 3RT13	20
3RA Load Feeders - ready to assemble kits for DOL	22
3RA Load Feeders - ready to assemble kits for R-DOL	23
3RA Load Feeders - ready to assemble kits for Star-Delta	27
3RV29 Infeed System	31
Reversing Contactor Assemblies - 3RA23	32
Star Delta Contactor Assemblies - 3RA24	32
Spares of 3RT Contactors	33
Contactor relays and Power Contactors - 3TH, 3TF	35
2 Pole DC Power Contactors - 3TC	36
Accessories and spares for 3TH, 3TF	36
Spares for 3TC Contactors	38
3TS & 3MT7 Capacitor duty Contactors	40
3TS Converter duty Contactors	40
3TS 2 Pole Contactors	41
Spares for 3TS & 3MT7 Contactors	41
3TS 4 Pole Contactors	42
3TS Single Pole LED Contactors	43
DP Contactors	44

Contents	Page No.
2 Protection Devices	
Thermal Overload Relays - 3RU	47
Microprocessor based overload relay - 3RB	48
Accessories for 3RU/3RB overload relays	49
Thermal overload relays - 3UA / 3UC / Accessories	51
Motor protection circuit breakers - 3RV	52
Accessories for 3RV	55
Motor protection circuit breakers - 3VS	58
Accessories for 3VS/3VU	59
3 Motor Starting Devices	
Digital soft starters and accessories - 3RW30/40/50	61
Digital soft starters and accessories - 3RW52/55	62
3RM1 starter	65
Agriculture and Industrial starters - 3TW/3TE	67
Spares for starters	68
Water level controller	68
4 Timing and Monitoring Devices	
Electronic timers - 3RP	69
Current monitoring relays - 3RR	69
Line monitoring relays - 3UG	69
Thermistor motor protection relays - 3RN2	70
Insulation monitoring relays - 3UG	70
Timing and Monitoring relays - 7PV0 / 7UG0	71
Plug-in-relays - 7RQ	72
5 Commanding and Signaling Devices	
SIRIUS ACT - 3SU	74
Signaling column - 8WN	77
Indicating lamps 3SB5 (complete and modular)	78
Push button - 3SB5	79
Push button stations - 3SB5	80
Accessories - 3SB5	80
6 Detecting Devices	
Position switches - 3SE5	82
Mechanical Safety Switches- 3SE5	85
7 Actuator sensor interface (AS-i)	86
8 SIMOCODE	88
9 Safety Relays & Systems - 3SK	90
10 Power Quality Solution NEW	92
11 Type-2 Co-ordination Charts	97
12 Available till stocks last	100
13 Discontinued	102
14 Contact Partners	
Customer care	104
Training centres	106
Offices and territory managers	Back cover



- Modular Design
- Space Saving
- Pre-assembled units
- Quick connections
- Efficient configuration
- Universal use

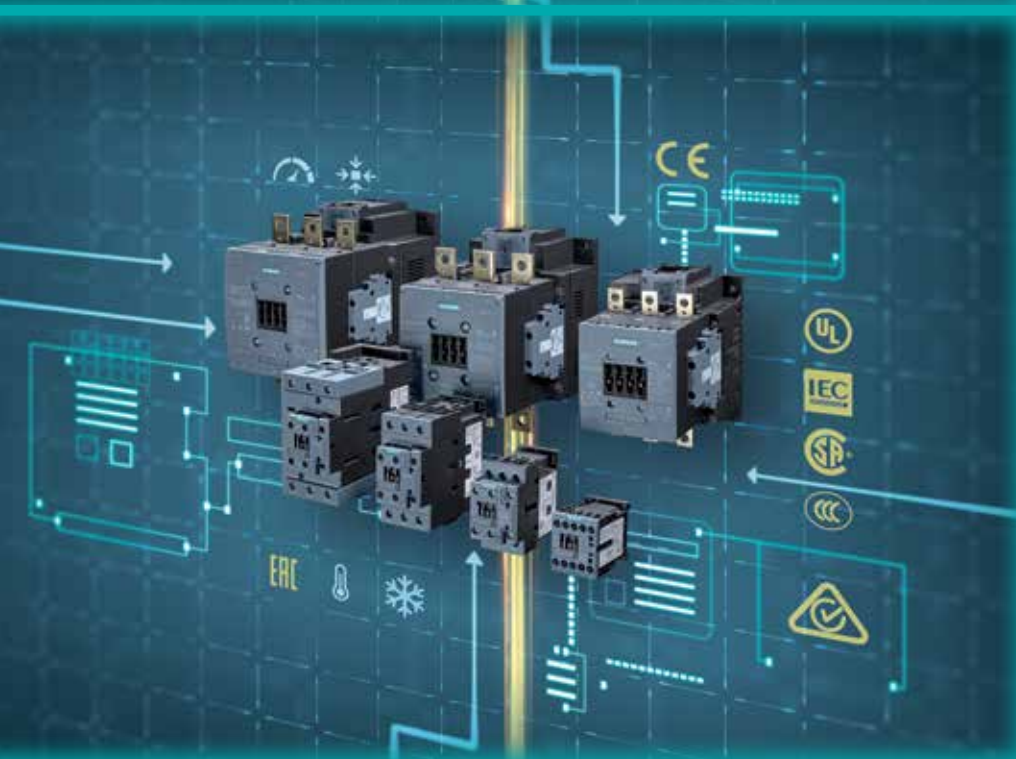

SIRIUS Modular System

The perfect combination



Contactor Relays (Auxiliary Contactors)



3RH2 (S00) with "Mechanically linked contact elements"

Screw terminals

Size	Operational Current I _e AC-15 at 230V A	Contacts NO	Contacts NC	AC Coil [§] NEW			DC Coil [®] NEW		
				Type*	Unit LP ¹⁾ ₹	Std. pkg. (nos.)	Type*	Unit LP ¹⁾ ₹	Std. pkg. (nos.)
S00	10	4	–	■ 3RH2140-1A..08K	1695.-	1	■ 3RH2140-1B..08K	2350.-	1
		3	1	■ 3RH2131-1A..08K	1695.-	1	■ 3RH2131-1B..08K	2350.-	1
		2	2	■ 3RH2122-1A..08K	1695.-	1	■ 3RH2122-1B..08K	2350.-	1

Note: For ordering SIRIUS Type No. ending without 8K please get in touch with your nearest sales office

\$@ Please enter coil codes from table below

Latched Contactor Relays

Screw terminals



Operational current I _e AC-15 at 230V A	Contacts NO	Contacts NC	AC Coil [§]			DC Coil [®]		
			Type	Unit LP ¹⁾ ₹	Std. pkg. (nos.)	Type	Unit LP ¹⁾ ₹	Std. pkg. (nos.)
10	4	–	3RH2440-1A..0	6210.-	1	3RH2440-1B..0	8250.-	1
	3	1	3RH2431-1A..0	6210.-	1	3RH2431-1B..0	8250.-	1
	2	2	3RH2422-1A..0	6210.-	1	3RH2422-1B..0	8250.-	1

\$@ Please enter coil codes from table below

* For ordering contactors with spring type terminals, please get in touch with sales office

For Latched Power Contactors refer 3RT accessory "Mechanical Latching Blocks" on page no. 17

Spring type terminals are not available for latched contactor relays.

Rated control supply voltages for 3RH21 & 3RH24

\$ AC coil voltage

Code	B0	■ F0	■ P0
Coil voltage 50/60 Hz	24	110	230

@ DC Coil Voltage

Code	■ B4	F4	M4
Coil voltage	24	110	220

1) For ordering contactors with other than above coil voltages, please add Rs. 230 to the unit LP of standard contactor.

Please contact nearest sales office for other coil voltages

Contactor Relays (with Low power consumption coil)

Auxiliary Contactor - 3RH21 Coupling Relays

Screw terminals



Size	Surge Suppressor	Rated operational current I _e AC-15 at 230 V A	Auxiliary contacts		Type*	Unit LP ₹	Std. pkg. (nos.)
			NO	NC			
Rated control supply voltage Us =24 V DC , Operating range 0.7 to 1.25xUs , Power Consumption 2.8W at 24V DC							
S00	Built in Suppressor Diode	10	4	-	3RH2140-1KB40	3030.-	1
			3	1	3RH2131-1KB40	3030.-	1
			2	2	3RH2122-1KB40	3030.-	1
Rated control supply voltage Us =24 V DC , Operating range 0.85 to 1.85xUs , Power Consumption 1.6W at 24V DC							
S00	Built in Suppressor Diode	10	4	-	3RH2140-1SB40	4320.-	1
			3	1	3RH2131-1SB40	4320.-	1
			2	2	3RH2122-1SB40	4320.-	1

* For ordering contactors with spring type terminals, please replace 8th digit from '1' to '2'

Note: 3RH21 Coupling Relays - Add-on Auxiliary contact blocks not applicable

■ Stock items

LP - List Price

Siemens Limited Low Voltage Control Products Price List Eff. 15.11.2022 5

Power Contactors

3RT (S00 to S12) with "Mirror contacts elements"

Screw terminals



Size	AC-3 operational current I _e upto 415V A	Motor rating at 415V, 50Hz kW	Auxiliary contacts	AC Coil [§] NEW			DC Coil [®] NEW		
				Type*	Unit LP ¹⁾ ₹	Std. pkg. (nos.)	Type*	Unit LP ¹⁾ ₹	Std. pkg. (nos.)
S00	7	3	1NO	3RT2015-1A..18K	1440.-	1	3RT2015-1B..18K	2230.-	1
			1NC	3RT2015-1A..28K	1440.-	1	3RT2015-1B..28K	2230.-	1
	9	4	1NO	3RT2016-1A..18K	1515.-	1	3RT2016-1B..18K	2425.-	1
			1NC	3RT2016-1A..28K	1515.-	1	3RT2016-1B..28K	2425.-	1
	12	5.5	1NO	3RT2017-1A..18K	1700.-	1	3RT2017-1B..18K	2810.-	1
			1NC	3RT2017-1A..28K	1700.-	1	3RT2017-1B..28K	2810.-	1
S0	16	7.5	1NO	3RT2018-1A..18K	2020.-	1	3RT2018-1B..18K	3300.-	1
			1NC	3RT2018-1A..28K	2020.-	1	3RT2018-1B..28K	3300.-	1
	25	11	1NO+1NC	3RT2026-1A..08K	2995.-	1	3RT2026-1B..08K	5195.-	1
	32	15	1NO+1NC	3RT2027-1A..08K	5840.-	1	3RT2027-1B..08K	10565.-	1
	38	18.5	1NO+1NC	3RT2028-1A..08K	8360.-	1	3RT2028-1B..08K	12555.-	1
	40	18.5	1NO+1NC	3RT2028-1A..08KA0 [#]	8815.-	1	3RT2028-1B..08KA0 [#]	13155.-	1

Note: For ordering SIRIUS Type No. ending without 8K please get in touch with your nearest sales office

Size	AC-3 operational current I _e upto 415V A	Motor rating at 415V, 50Hz kW	Auxiliary contacts	AC Coil [§]			AC/DC Coil [€]		
				Type	Unit LP ¹⁾ ₹	Std. pkg. (nos.)	Type	Unit LP ¹⁾ ₹	Std. pkg. (nos.)
S2	50	22	1NO+1NC	3RT2036-1A..0	11555.-	1	3RT2036-1N..0	18550.-	1
	65	30	1NO+1NC	3RT2037-1A..0	16055.-	1	3RT2037-1N..0	21015.-	1
	80	37	1NO+1NC	3RT2038-1A..0	19975.-	1	3RT2038-1N..0	25595.-	1
S3	95	45	1NO+1NC	3RT2046-1A..0	25345.-	1	3RT2046-1N..0	31790.-	1
	110	55	1NO+1NC	3RT2047-1A..0	32400.-	1	3RT2047-1N..0	41135.-	1

Size	AC-3 operational current I _e upto 415V A	Motor rating at 415V, 50Hz kW	Auxiliary contacts **	AC Coil [§] NEW			Auxiliary contacts	AC/DC Coils (Conventional Type) [€]		
				Type	Unit LP ₹	Std. pkg. (nos.)		Type	Unit LP ₹	Std. pkg. (nos.)
S6	115	55	–	3RT1054-6C.308K	31070.-	1	2NO+2NC	3RT1054-6A.368K	32550.-	1
	150	75	–	3RT1055-6C.308K	39400.-	1	2NO+2NC	3RT1055-6A.368K	41040.-	1
	185	90	–	3RT1056-6C.308K	49435.-	1	2NO+2NC	3RT1056-6A.368K	51340.-	1
S10	225	110	–	3RT1064-6C.308K	52735.-	1	2NO+2NC	3RT1064-6A.368K	54760.-	1
	265	132	–	3RT1065-6C.308K	64475.-	1	2NO+2NC	3RT1065-6A.368K	66315.-	1
	300	160	–	3RT1066-6C.308K	77035.-	1	2NO+2NC	3RT1066-6A.368K	79235.-	1
S12	400	200	–	3RT1075-6C.308K	92560.-	1	2NO+2NC	3RT1075-6A.368K	95200.-	1
	500	250	–	3RT1076-6C.308K	129350.-	1	2NO+2NC	3RT1076-6A.368K	131790.-	1

\$@€ Please enter coil codes from table below € available with universal operation # 40A Size S0 3RT2028 contactor is available with screw type terminals only

** Please select required Auxiliary Contact Blocks from Page 7

* For ordering contactors with spring type terminals, please get in touch with sales office

Rated control supply voltages

(For 3RT2 Change the 10th & 11th digit and for 3RT1 Change the 10th digit of Type no.)

\$ - AC operation 50/60Hz

Contactor type	3RT20 1	3RT20 2	3RT20 3	3RT20 4
Size	S00	S0	S2	S3
24 V AC	B0	C2	C2	C2
110 V AC	F0	G2	G2	G2
230 V AC	P0	L2	L2	L2

@ - DC operation

Contactor type	3RT20 1,3RH2	3RT20 2	3RT20 3	3RT20 4
Size	S00	S0	S2	S3
24 V DC	B4	B4	–	–
110 V DC	F4	F4	–	–
220 V DC	M4	M4	–	–

€ - Universal operation (AC / DC) for 3RT2 S2, S3 and for 3RT1 S6, S10, S12

Contactor Type	3RT203..N	3RT204..N
Size	S2	S3
20...33 V AC/DC	B3	B3
83...155 V AC/DC	F3	F3
175...280 V AC/DC	P3	P3

Contactor Type	3RT1_Conventional Coil
Size	S6, S10, S12
110...127 V AC/DC	F
220...240 V AC/DC	P

1) For ordering contactors with other than above coil voltages, please add Rs. 230/- to the unit LP of standard contactor of the same rating.

Please contact nearest sales office for other coil voltages

Note: All SIRIUS 3RT20 / 3RT10 contactors (with at least 1 NC auxiliary contact) are tested to "Mirror contacts" characteristics in conjunction with auxiliary contacts ever since the launch of product

■ Stock items

Power Contactors

3RT (S6, S10, S12) with "Mirror contacts elements" Withdrawable coils and integrated varistor in coil circuit


Contactor without operating coil (Please order coil separately)

Size	AC-3 operational current I _e upto 415V A	Motor rating at 415V, 50Hz kW	Contactor w/o Aux NEW				Contactor with Aux			
			Auxiliary contacts**	Type	Unit LP ₹	Std. pkg. (nos.)	Auxiliary contacts	Type	Unit LP ₹	Std. pkg. (nos.)
S6	115	55	–	■ 3RT1054-6LA008K	24065.-	1	2NO+2NC	■ 3RT1054-6LA068K	25525.-	1
	150	75	–	■ 3RT1055-6LA008K	33280.-	1	2NO+2NC	■ 3RT1055-6LA068K	34000.-	1
	185	90	–	■ 3RT1056-6LA008K	42790.-	1	2NO+2NC	■ 3RT1056-6LA068K	44435.-	1
S10	225	110	–	■ 3RT1004-6LA008K	44015.-	1	2NO+2NC	■ 3RT1064-6LA068K	45705.-	1
	265	132	–	■ 3RT1005-6LA008K	55360.-	1	2NO+2NC	■ 3RT1065-6LA068K	56945.-	1
	300	160	–	■ 3RT1006-6LA008K	67845.-	1	2NO+2NC	■ 3RT1066-6LA068K	69785.-	1
S12	400	200	–	■ 3RT1075-6LA008K	76935.-	1	2NO+2NC	■ 3RT1075-6LA068K	79130.-	1
	500	250	–	■ 3RT1076-6LA008K	113150.-	1	2NO+2NC	■ 3RT1076-6LA068K	115285.-	1

**Please select the required Contact Blocks from below table

Auxiliary Contact Blocks (S6 - S12)

Size					Type	Unit LP ₹	Std. pkg. (nos.)
1 Pole Front mounted Auxiliary Contact blocks S6 - S12 (3RT1.5 ... 3RT1.7)							
S6 - S12	1	—	—	—	3RH1921-1CA10	255.-	10
	—	1	—	—	3RH1921-1CA01		10
	—	—	1	—	3RH1921-1CD10	500.-	10
	—	—	—	1	3RH1921-1CD01		10
2 Pole First Laterally mountable Auxiliary Contact blocks S6 - S12 (3RT1.5 ... 3RT1.7)							
S6 - S12	2	—	—	—	3RH1921-1EA20	1075.-	1
	1	1	—	—	3RH1921-1EA11		1
	—	2	—	—	3RH1921-1EA02		1
2 Pole Second Laterally mountable Auxiliary Contact blocks S6 - S12 (3RT1.5 ... 3RT1.7)							
S6 - S12	2	—	—	—	3RH1921-1KA20	1075.-	1
	1	1	—	—	3RH1921-1KA11		1
	—	2	—	—	3RH1921-1KA02		1



Delayed actuation

Coil

Size	AC Coil NEW				AC/DC Conventional Coils (U _c Coils)			
	Rated control supply voltage U _c 40 to 60 Hz AC, DC V AC/DC	Type	Unit LP ₹	Std. pkg. (nos.)	Rated control supply voltage U _c 40 to 60 Hz AC, DC V AC/DC	Type	Unit LP ₹	Std. pkg. (nos.)
S6	23...26	■ 3RT1955-5CB318K	5335.-	1	23...26	■ 3RT1955-5AB318K	5485.-	1
	110...127	■ 3RT1955-5CF318K		1	110...127	■ 3RT1955-5AF318K		1
	220...240	■ 3RT1955-5CP318K		1	220...240	■ 3RT1955-5AP318K		1
	380...420	■ 3RT1955-5CV318K		1	380...420	■ 3RT1955-5AV318K		1
				1	500...550*	■ 3RT1955-5AS31		1
S10	110...127	■ 3RT1965-5CF318K	7850.-	1	23...26	■ 3RT1965-5AB31	8075.-	1
				1	110...127	■ 3RT1965-5AF318K		1
	220...240	■ 3RT1965-5CP318K		1	220...240	■ 3RT1965-5AP318K		1
	380...420	■ 3RT1965-5CV318K		1	380...420	■ 3RT1965-5AV318K		1
				1	500...550*	■ 3RT1965-5AS31		1
S12	110...127	■ 3RT1975-5CF318K	14705.-	1	23...26	■ 3RT1975-5AB31	15125.-	1
				1	110...127	■ 3RT1975-5AF318K		1
	220...240	■ 3RT1975-5CP318K		1	220...240	■ 3RT1975-5AP318K		1
				1	380...420	■ 3RT1975-5AV31		1
				1	500...550*	■ 3RT1975-5AS31		1

* Specially designed coil for mining applications offers complete operating range from 400V to 605V AC/DC

3RT2 (S0)

3RT2 (S0)

Size	AC-3 operational current Ie upto 415V A	Motor rating at 415V, 50Hz kW	Auxiliary contacts	AC Coil [§] NEW			DC Coil [®] NEW		
				Type	Unit LP ¹⁾ ₹	Std. pkg. (nos.)	Type	Unit LP ¹⁾ ₹	Std. pkg. (nos.)
3RT2 Size S0 Contactor									
S0	9	4	- 1NO + 1NC	■ 3RT2023-1A..08K	1845.-	1	■ 3RT2023-1B..08K	3030.-	1
	12	5.5	1NO + 1NC	■ 3RT2024-1A..08K	2070.-	1	■ 3RT2024-1B..08K	3355.-	1
	17	7.5	- 1NO + 1NC	■ 3RT2025-1A..08K	2410.-	1	■ 3RT2025-1B..08K	4140.-	1

§ @ Change the 10th and 11th digit of the Article No. Refer page 6 for coil codes

1) For ordering contactors (3RT2 S0) with other than coil codes mentioned in the table in Page 6, please add Rs. 230/- to the unit LP of standard contactor of the same rating. Please contact nearest sales office for other coil voltages

■ Stock items

SIEMENS



Widest Range of Energy Efficient Contactors

When you go for Energy Efficiency improvement of your plant or a machine, just DON'T Stop at big items like Motors, HVAC etc.

Generally overlooked product like a CONTACTOR can also contribute much more, when it comes to Energy Efficiency improvement.

Explore SIRIUS Innovation Energy Efficient Contactor Portfolio

www.siemens.com/SIRIUS


SIRIUS - Energy Efficient Contactor Portfolio (9A to 500A AC-3)

Contactor coil consumes continuous power as long as in operation



3RT20 | 95A AC-3

Typical Holding Power data comparison

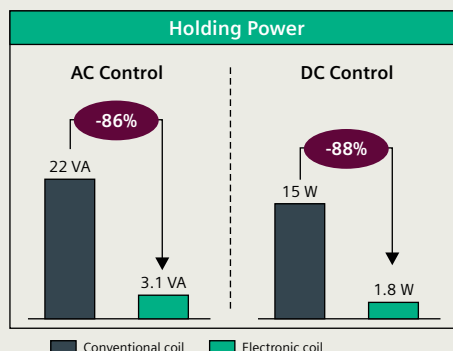


Contactors with Electronic coil can be up to **88%** more Energy Efficient as compared to conventional AC or DC contactor

Typical Coil Consumption (Holding)

12-38A AC-3 3RT202.-1N..0			50-80A AC-3 3RT203.-1N..0			95-110A AC-3 3RT204.-1N..0		
	AC Control	DC Control		AC Control	DC Control		AC Control	DC Control
Size S0	1.9 VA	1.4 W	Size S2	2 VA	1 W	Size S3	3.1 VA	1.8 W
115-185A AC-3 3RT105.-6N.36			225-300A AC-3 3RT106.-6N.36			400-500A AC-3 3RT107.-6N.36		
	AC Control	DC Control		AC Control	DC Control		AC Control	DC Control
Size S6	3.5 VA	2.1 W	Size S10	5.5 VA	2.8 W	Size S12	5.6 VA	3 W

Energy Efficient Power Contactor - 3RT

(Electronic Coil - Universal AC/DC operation)

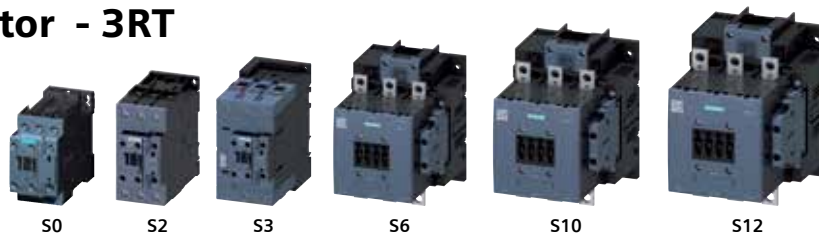

Screw terminals

Size	Surge Suppressor	AC-3 operational current I _e upto 415V A	Motor rating at 415V, 50Hz kW	Auxiliary contacts		Type*	Unit LP ₹	Std. pkg. (nos.)
				NO	NC			
Extended operating range 0.7 to 1.3 x U _s								
S0	Varistor integrated	9	4	1	1	3RT2023-1N..0	3735.-	1
		12	5.5	1	1	3RT2024-1N..0	4385.-	1
		17	7.5	1	1	3RT2025-1N..0	4930.-	1
		25	11	1	1	3RT2026-1N..0	6945.-	1
		32	15	1	1	3RT2027-1N..0	14210.-	1
		38	18.5	1	1	3RT2028-1N..0	16465.-	1
Extended operating range 0.8 to 1.1 x U _s								
S2	Varistor integrated	50 ... 80	22 ... 37	1	1	refer page no. 6		
S3	Varistor integrated	95 ... 110	45 ... 55	1	1	refer page no. 6		
S6-12	Varistor integrated	115 ... 500	55 ... 250	2	2	refer page no. 6 & 7		

* For ordering contactors with spring type terminals, please replace 8th digit from '1' to '2' only for size S0

Contactor type	3RT202..-1N
Size	S0
21 ... 28 V AC/DC	B3
95 ... 130 V AC/DC	F3
200 ... 280 V AC/DC	P3

Power Contactors - 3RT20 coupling relays (PLC interface relay)



Screw terminals


Size	Surge Suppressor	AC-3 Operational Current le upto 415V A	Rating of induction motor at 50 Hz and 415V	Auxiliary contacts		Type*	Unit LP ₹	Std. pkg. (nos.)
				NO	NC			
Rated control supply voltage Us =24 V DC, Operating range 0.7 to 1.25 x Us, Holding power consumption 2.8W at 24V DC								
S00	Built in suppressor Diode	7	3	1	–	3RT2015-1KB41	2625.-	1
				–	1	3RT2015-1KB42	2625.-	1
		9	4	1	–	3RT2016-1KB41	2980.-	1
				–	1	3RT2016-1KB42	2980.-	1
		12	5.5	1	–	3RT2017-1KB41	3075.-	1
				–	1	3RT2017-1KB42	3075.-	1
Rated control supply voltage Us =24 V DC, Operating range 0.7 to 1.25 x Us, Holding Power Consumption 4.5W at 24V DC								
S0	Varistor integrated	12	5.5	1	1	3RT2024-1KB40	3650.-	1
		17	7.5	1	1	3RT2025-1KB40	5575.-	1
		25	11	1	1	3RT2026-1KB40	6725.-	1
		32	15	1	1	3RT2027-1KB40	11385.-	1
Rated control supply voltage Us =24 V DC, Operating range 0.8 to 1.2 x Us, Holding Power Consumption 1W at 24V DC								
S2	Varistor integrated	50	22	1	1	3RT2036-1KB40	19280.-	1
		65	30	1	1	3RT2037-1KB40	21655.-	1
		80	37	1	1	3RT2038-1KB40	25830.-	1
Rated control supply voltage Us =24V DC, Operating range 0.8 to 1.2 x Us, Holding Power Consumption 0.9W at 24V DC								
S3	Varistor integrated	95	45	1	1	3RT2046-1KB40	32290.-	1

* For ordering contactors with spring type terminals, please replace 8th digit from '1' to '2' only for size S00, S0
Add-on Auxiliary contact blocks: S00: Not applicable, S0: Laterally mountable, S2/S3: Front and Laterally mountable

Vacuum Contactors - 3RT12

Benefits

- AC-3 electrical life expectancy of about 2.5 million operation
- Contacts in the tube will not weld. Arc contained, therefore no gas generated nor flash during operation
- No deration of rated current up to 1000V AC for 3RT12 and up to 690V AC for 3TF6
- Visual inspection window for inspection of contact erosion available for 3RT12

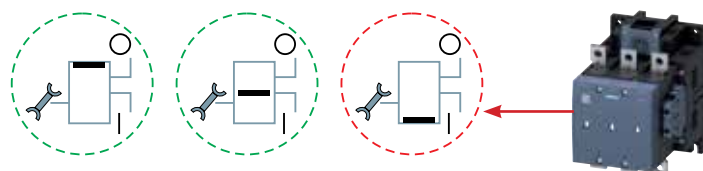

with universal coil (AC/DC) Coils, 2NO+2NC aux. contacts

Contactor size	Rated current I _e (A) AC3 upto 415V	Type [€]	Unit LP ₹	Std. pkg. (nos.)
10	225	3RT1264-6A..6	159090.-	1
10	265	3RT1265-6A..6	187925.-	1
10	300	3RT1266-6A..6	205840.-	1
12	400	3RT1275-6A..6	260250.-	1
12	500	3RT1276-6A..6	338190.-	1

[€] Coil voltage (AC/DC) - Please enter coil codes from table below

Code	B3	F3	P3	V3
Coil voltage (V)	23-26	110-127	220-240	380-420

Note: Contactors with Energy Efficient coils available on request

Vacuum Contactors - 3TF6

Size	Rated current (A) I _e AC3 upto 415V	Motor kW at 415V 50Hz, 3ph	AC 50 Hz coil				DC coil			
			Auxiliary contacts	Type Pl. fill in coil voltage code	Unit LP ₹	Std. pkg. (nos.)	Auxiliary contacts	Type Pl. fill in coil voltage code	Unit LP ₹	Std. pkg. (nos.)
14	630	355	4NO + 4NC	3TF6844-0C..	381490.-	1	3NO + 3NC	3TF6833-1D.. ¹⁾	426520.-	1
	820	450	4NO + 4NC	3TF6944-0C..	566795.-	1	3NO + 3NC	3TF6933-1D.. ¹⁾	651470.-	1

For coil codes & foot note (1) refer page no. 35

Power Contactors - 3RT with indication of Remaining LifeTime (RLT)


Withdrawable coils and integrated surge suppressor

Benefits

- Early warning to replace contacts
- Optimum utilization of contact material
- Visual inspection of condition of contacts no longer necessary
- Reduction of operating costs
- Optimum planning of maintenance schedules
- Avoidance of unforeseen plant downtimes

Size	AC-3 Operational Current I _e upto 415 V ¹⁾ A	Motor rating at 415V, 50Hz kW	Auxiliary contacts	Rated control supply voltage U _c 40 to 60 Hz AC, DC V AC/DC	Type	Unit LP ₹	Std. pkg. (nos.)
S6	115	55	1NO+1NC	96...127	3RT1054-1PF35	49780.-	1
			1NO+1NC	220...277	3RT1054-1PP35	49780.-	
	150	75	1NO+1NC	96...127	3RT1055-6PF35	58060.-	1
			1NO+1NC	220...277	3RT1055-6PP35	58060.-	
S10	185	90	1NO+1NC	96...127	3RT1056-6PF35	68605.-	1
			1NO+1NC	220...277	3RT1056-6PP35	68605.-	
	225	110	1NO+1NC	96...127	3RT1064-6PF35	72675.-	1
			1NO+1NC	220...277	3RT1064-6PP35	72675.-	
S12	265	132	1NO+1NC	96...127	3RT1065-6PF35	85660.-	1
			1NO+1NC	220...277	3RT1065-6PP35	85660.-	
	300	160	1NO+1NC	96...127	3RT1066-6PF35	99815.-	1
			1NO+1NC	220...277	3RT1066-6PP35	99815.-	
S12	400	200	1NO+1NC	96...127	3RT1075-6PF35	113015.-	1
			1NO+1NC	220...277	3RT1075-6PP35	113015.-	
	500	250	1NO+1NC	96...127	3RT1076-6PF35	167485.-	1
			1NO+1NC	220...277	3RT1076-6PP35	167485.-	

1) For size S6 to S12 size contactors, operating current I_e is valid up to 500V

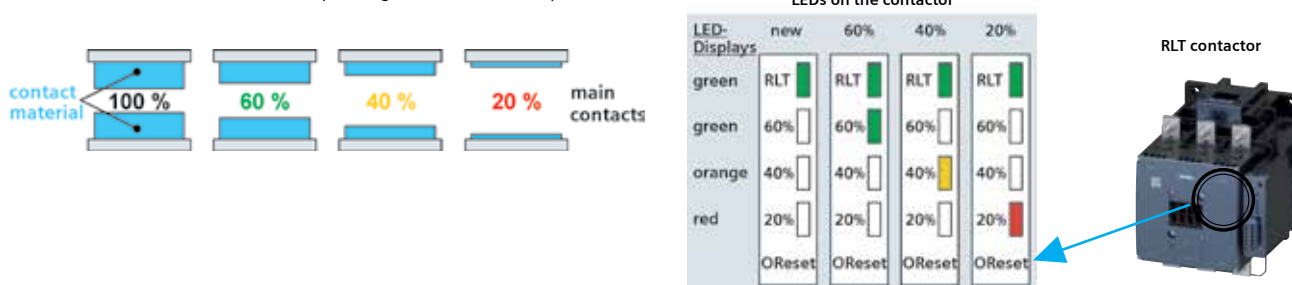

3 Pole AC1 Duty Contactors



Size	AC-1 operational current I _e upto 690V A	AC Coil [§]			AC/DC Coil [€]		
		Type	Unit LP ₹	Std. pkg. (nos.)	Type	Unit LP ₹	Std. pkg. (nos.)
S3	140	3RT2446-1A..0	23710.-	1	3RT2446-1N..0	30130.-	1

Size	AC-1 operational current I _e upto 690V A	Auxiliary Contacts	Type [€]	Unit LP ₹	Std. pkg. (nos.)
S6	275	2NO+2NC	3RT1456-6A..68K	57990.-	1
S10	400	2NO+2NC	3RT1466-6A..68K	79110.-	1
S12	690	2NO+2NC	3RT1476-6A..68K	164100.-	1

4 Pole Power Contactors

With 4NO main contacts



Contactor size	Rated current I _e (A) AC1, 415V	Auxiliary Contacts		AC Coil [§]			DC Coil [®]		
		NO	NC	Type	Unit LP ₹	Std. pkg. (nos.)	Type	Unit LP ₹	Std. pkg. (nos.)
S00	18	–	–	3RT2316-1A..0	2765.-	1	3RT2316-1B..0	4485.-	1
	22	–	–	3RT2317-1A..0	2865.-	1	3RT2317-1B..0	4775.-	1
S0	35	1	1	3RT2325-1A..0	3190.-	1	3RT2325-1B..0	5710.-	1
	40	1	1	3RT2326-1A..0	4955.-	1	3RT2326-1B..0	8805.-	1
	50	1	1	3RT2327-1A..0	5990.-	1	3RT2327-1B..0	11215.-	1
S2	60	1	1	3RT2336-1A..0	13205.-	1	3RT2336-1N..0 [€]	16395.-	1
	110	1	1	3RT2337-1A..0	22105.-	1	3RT2337-1N..0 [€]	24740.-	1
S3	140	1	1	3RT2346-1A..0	24575.-	1	3RT2346-1N..0 [€]	31775.-	1
	160	1	1	3RT2348-1A..0	28500.-	1	3RT2348-1N..0 [€]	33775.-	1

With 4NO main contacts



Size	AC-1 operational current I _e upto 690V A	Auxiliary Contacts	Type [€]	Unit LP ₹	Std. pkg. (nos.)
S6	200	2NO+2NC	3RT1355-6A..6	49840.-	1
S10	275	2NO+2NC	3RT1363-6A..6	73700.-	1
	350	2NO+2NC	3RT1364-6A..6	94700.-	1
S12	400	2NO+2NC	3RT1373-6A..6	109815.-	1
	500	2NO+2NC	3RT1374-6A..6	133030.-	1
	525	2NO+2NC	3RT1375-6A..6	148425.-	1

With 2NO+2NC main contacts



size	AC-1 operational current I _e upto 415V A	Auxiliary Contacts		AC Coil [§]			DC Coil [®]		
		NO	NC	Type	Unit LP ₹	Std. pkg. (nos.)	Type	Unit LP ₹	Std. pkg. (nos.)
S00	18	–	–	3RT2516-1A..0	2925.-	1	3RT2516-1B..0	3805.-	1
	22	–	–	3RT2517-1A..0	3440.-	1	3RT2517-1B..0	5615.-	1
S0	40	1	1	3RT2526-1A..0	5785.-	1	3RT2526-1B..0	10460.-	1
S2	60	1	1	3RT2535-1A..0	15180.-	1	3RT2535-1N..0 [€]	19815.-	1
	70	1	1	3RT2536-1A..0	19585.-	1	3RT2536-1N..0 [€]	22485.-	1
S3	100	1	1	3RT2544-1A..0	21945.-	1	3RT2544-1N..0 [€]	25935.-	1
	125	1	1	3RT2545-1A..0	24435.-	1	3RT2545-1N..0 [€]	30785.-	1

Rated control supply voltage (Change of the 10th and 11th digit of the Article No.)

\$ - AC operation

Contactor type	3RT23, 3RT25	3RT24
Size	S00 (50/60Hz), S0, S2, S3 (50 Hz)	S3 (50/60Hz)
24 V AC	B0	C2
110 V AC	F0	G2
230 V AC	P0	L2

@ - DC operation

Contactor type	3RT23, 3RT25
Size	S00, S0
24 V DC	B4
110 V DC	F4
220 V DC	M4

€ - Universal operation AC / DC

Contactor type	3RT23, 3RT25, 3RT24
Size	S2, S3
20 ... 33	B3
175 ... 280	P3

Contactor Type	3RT13
Size	S6, S10, S12
24 ... 60	E3
48 ... 130	F3
100 ... 250	P3
250 ... 500	R3

Contactor type	3RT 14
Size	S6, S10, S12
20 ... 26	B3
110 ... 127	F3
220 ... 240	P3



SIRIUS 3RT14, 3-pole Large Contactors for high currents

www.siemens.com/SIRIUS

NEW

Type*	Rating data		Lateral Auxiliary Contacts		Rated control supply voltage U	
	Operating Current I_e (A) AC1	Rated voltage U_e	NO	NC	V (AC 50/60 Hz)	V (DC)
3RT1481-6AF36 3RT1481-6AP36	900A	1000V	2	2	100...127 200...240	100...110 200...220
3RT1482-6AF36 3RT1482-6AP36	1050A	1000V	2	2	100...127 200...240	100...110 200...220
3RT1483-6AP36	1260A	1000V	2	2	100...240	100...220
3RT1485-6AP36	1700A	1000V	2	2	100...240	100...220
3RT1486-6AP36	2100A	1000V	2	2	100...240	100...220
3RT1487-6AP36	2650A	1000V	2	2	100...240	100...220

*Price on request

The world's first contactor with maximum benefits in safety applications!

SIRIUS Innovation contactors from size S2 to S12 (22kW to 250kW) has been now expanded to include versions suitable for direct control from fail-safe controllers and safety relays which is first of its kind in the market.

This makes it possible to attain SIL 2 and/or PL c with just one contactor and SIL 3 and/or PL e with two contactors in series according to IEC 62061 and ISO 13849-1

www.siemens.com/SIRIUS



Advantages at a glance

01

Digital input directly on board

First contactor with certified, digital input for activation from fail-safe or standard controllers

02

Time & Cost saving

Reduced wiring and configuration efforts
Cost optimization of additional coupling level

03

Maximum Safety level

Certified inputs enables devices to be used up to the highest safety level (SIL 3 / PLe)

04

Everything from single source

Complements safety solutions offered by the SIRIUS modular system




SIRIUS Innovation Contactors with fail-safe input

Size	AC-3 operational current I _e upto 415V A	Motor rating at 415V, 50Hz kW	Permanently Mounted Auxiliary Contacts	Rated control supply voltages U _s AC/DC	Type	Unit LP ₹	Std Pkg. (nos.)
S6	115	55	2NO+2NC	96...127	3RT1054-6SF36-3PA0	45940.-	1
				220...227	3RT1054-6SP36-3PA0	45940.-	
	150	75	2NO+2NC	96...127	3RT1055-6SF36-3PA0	56035.-	1
				220...227	3RT1055-6SP36-3PA0	56035.-	
	185	90	2NO+2NC	96...127	3RT1056-6SF36-3PA0	65850.-	1
				220...227	3RT1056-6SP36-3PA0	65850.-	
S10	225	110	2NO+2NC	96...127	3RT1064-6SF36-3PA0	72350.-	1
				220...227	3RT1064-6SP36-3PA0	72350.-	
	265	132	2NO+2NC	96...127	3RT1065-6SF36-3PA0	86215.-	1
				220...227	3RT1065-6SP36-3PA0	86215.-	
	300	160	2NO+2NC	96...127	3RT1066-6SF36-3PA0	99605.-	1
				220...227	3RT1066-6SP36-3PA0	99605.-	
S12	400	200	2NO+2NC	96...127	3RT1075-6SF36-3PA0	114735.-	1
				220...227	3RT1075-6SP36-3PA0	114735.-	
	500	250	2NO+2NC	96...127	3RT1076-6SF36-3PA0	163930.-	1
				220...227	3RT1076-6SP36-3PA0	163930.-	

For S2 and S3 Contactors please get in touch with your nearest sales office

Communication capable Power Contactors

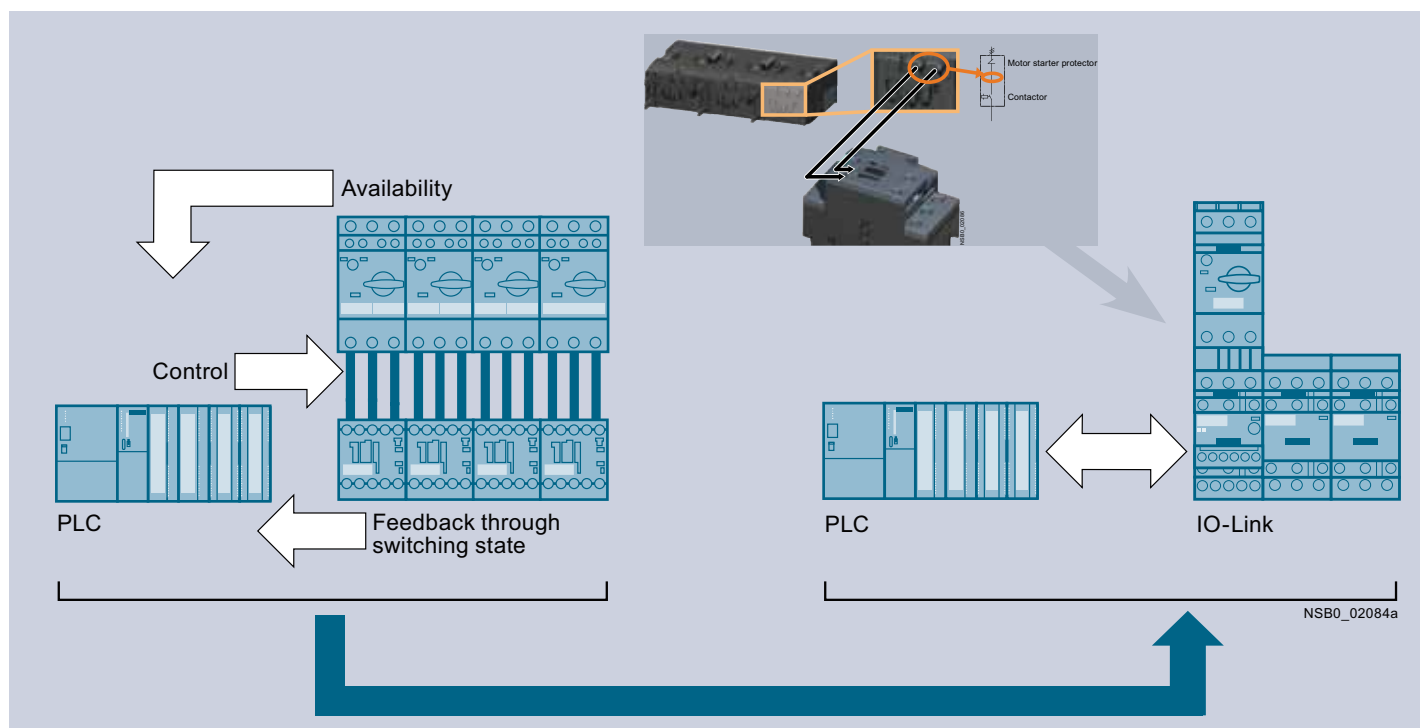

Rated control supply voltage $U_s = 24 \text{ V DC}$
Screw terminals

Size	AC-3 Operational Current I_e upto 415V A	Motor rating at 415V, 50 Hz kW	Auxiliary contacts	Type*	Unit LP ₹	Std. pkg. (nos.)
S00	7	3	1NO	3RT2015-1BB41-0CC0	2770.-	1
			1NC	3RT2015-1BB42-0CC0		
	9	4	1NO	3RT2016-1BB41-0CC0	3020.-	1
			1NC	3RT2016-1BB42-0CC0		
	12	5.5	1NO	3RT2017-1BB41-0CC0	3470.-	1
			1NC	3RT2017-1BB42-0CC0		
S0	16	7.5	1NO	3RT2018-1BB41-0CC0	4110.-	1
			1NC	3RT2018-1BB42-0CC0		
	9	4	1NO + 1NC	3RT2023-1BB40-0CC0	3680.-	1
	12	5.5	1NO + 1NC	3RT2024-1BB40-0CC0	4045.-	1
	17	7.5	1NO + 1NC	3RT2025-1BB40-0CC0	5665.-	1
	25	11	1NO + 1NC	3RT2026-1BB40-0CC0	6850.-	1
S2	32	15	1NO + 1NC	3RT2027-1BB40-0CC0	11460.-	1
	38	18.5	1NO + 1NC	3RT2028-1BB40-0CC0	15840.-	1
	50	22	1NO + 1NC	3RT2036-1NB30-0CC0 [€]	19280.-	1
	65	30	1NO + 1NC	3RT2037-1NB30-0CC0 [€]	21720.-	1
S3	80	37	1NO + 1NC	3RT2038-1NB30-0CC0 [€]	26370.-	1
	95	45	1NO + 1NC	3RT2046-1NB30-0CC0 [€]	34445.-	1
	110	55	1NO + 1NC	3RT2047-1NB30-0CC0 [€]	43630.-	1

*For ordering contactors with spring type terminals, please replace 8th digit from '1' to '2' for S00, S0
[€] - Universal operation 20...33V AC / DC

Solid state switching devices - 3RF

Solid state contactless switching for application requiring frequent switching

- Compact 22.5mm design with built in LED & finger touch proof protection
- Blocking voltage 1200V

- Main voltage 48-460V AC
- Control voltage 4-30V DC
- Zero point switching



Rated current AC51 (max)	Type	Unit LP ₹	Std. pkg. (kits)
20	3RF2120-1AA45 ^{\$}	3100.-	1
30	3RF2130-1AA45 ^{\$}	4795.-	1
50	3RF2150-1AA45 ^{\$}	7975.-	1
70	3RF2170-1AA45 ^{\$}	9255.-	1
90	3RF2190-1AA45 ^{\$}	11450.-	1

^{\$} To be used along with suitable heatsink, other voltages upon enquiry

Contact your nearest Siemens partner to know more about

- 3RF20 solid state relays with 45mm design for resistive loads
- 3RF23 single phase solid state contactors with built in heatsink for resistive/inductive loads
- 3RF24 three phase solid state contactors with built-in heat sink for resistor loads upto 50A
- Add on function modules to achieve extended functionality

Accessories for 3RH2 & 3RT2 Contactors (S00 / S0 / S2 / S3)

Auxiliary Contact Blocks (S00 / S0 / S2 / S3)

for snapping onto the front

For	NO	NC	Type*	Unit LP ₹	Std. pkg. (nos.)
S00 / S0 / S2 / S3	1	—	3RH2911-1HA10	340.-	1
	—	1	3RH2911-1HA01		1
	2	—	3RH2911-1HA20	475.-	1
	1	1	3RH2911-1HA11		1
	—	2	3RH2911-1HA02		1
	2	2	3RH2911-1HA22	845.-	1
	3	1	3RH2911-1HA31		1
	4	—	3RH2911-1FA40		1



* For ordering auxiliary contact blocks with Spring type terminals, please replace 8th digit from '1' to '2'

Laterally mountable auxiliary switch blocks on left and / or right

For	NO	NC	Type* ¹⁾	Unit LP ₹	Std. pkg. (nos.)
S00 / S0 / S2 / S3	—	2	3RH2921-1DA02	1010.-	1
	1	1	3RH2921-1DA11		1
	2	—	3RH2921-1DA20		1



* For ordering auxiliary contact blocks with Spring type terminals, please replace 8th digit from '1' to '2'

1) Only left side mounting possible for 3RH2 contactor relays

Accessories for 3 Pole 3RT1 Contactors (S6 - S12)

Auxiliary Contact Blocks (S6 - S12)

Size	 NO	 NC	 #NO	 #NC	Type	Unit LP ₹	Std. pkg. (nos.)
1 Pole Front mounted Auxiliary Contact blocks S6 - S12 (3RT1.5 ... 3RT1.7)							
S6 - S12	1	—	—	—	3RH1921-1CA10	255.-	10
	—	1	—	—	3RH1921-1CA01		10
	—	—	1	—	3RH1921-1CD10	500.-	10
	—	—	—	1	3RH1921-1CD01		10
2 Pole First Laterally mountable Auxiliary Contact blocks S6 - S12 (3RT1.5 ... 3RT1.7)							
S6 - S12	2	—	—	—	3RH1921-1EA20	1075.-	1
	1	1	—	—	3RH1921-1EA11		1
	—	2	—	—	3RH1921-1EA02		1
2 Pole Second Laterally mountable Auxiliary Contact blocks S6 - S12 (3RT1.5 ... 3RT1.7)							
S6 - S12	2	—	—	—	3RH1921-1KA20	1075.-	1
	1	1	—	—	3RH1921-1KA11		1
	—	2	—	—	3RH1921-1KA02		1



Delayed actuation

Accessories for 3RT2 and 3RH2 Contactors (S00, S0, S2, S3)

Surge suppressors

Screw and spring terminals

Size	For Contactor	Version	AC Operation	DC Operation	Type	Unit LP ₹	Std. pkg. (nos.)
			Rated control supply voltage (U _s)				
			V AC	V DC			
for 3RH2 & 3RT2 Size S00							
S00	3RT2.1 & 3RH2.	Varistors (with LED)	24 ... 48	12 ...24	■ 3RT2916-1JJ00	770.-	1
			48 ... 127	24 ... 70	■ 3RT2916-1JK00		1
			127 ... 240	70 ... 150	■ 3RT2916-1JL00		1
			--	150 ... 250	3RT2916-1JP00		1
		RC Elements	24 ... 48	24 ... 70	3RT2916-1CB00		1
			48 ... 127	70 ... 150	3RT2916-1CC00		1
			127 ... 240	150 ... 250	3RT2916-1CD00		1
		Diode assemblies	--	12 ...250	3RT2916-1EH00		1
		Diode with LED	--	24 ... 70	3RT2916-1LM00		1
Additional load modules	180 ... 255	--	3RT2916-1GA00	1			
for 3RT2 Size S0							
S0	3RT2.2	Varistors	24 ... 48	24 ... 70	■ 3RT2926-1BB00	1020.-	1
			48 ... 127	70 ... 150	■ 3RT2926-1BC00		1
			127 ... 240	150 ... 250	■ 3RT2926-1BD00		1
			240 ... 400	--	■ 3RT2926-1BE00		1
		RC Elements	24 ... 48	24 ... 70	3RT2926-1CB00		1
			48 ... 127	70 ... 150	3RT2926-1CC00		1
			127 ... 240	150 ... 250	3RT2926-1CD00		1
			240 ... 400	--	3RT2926-1CE00		1
		Diode assemblies	--	24	3RT2926-1ER00		1
			--	30 ... 250	3RT2926-1ES00		1
		Varistor with LED	127 ... 240	70 ... 150	3RT2926-1JL00		1
		for 3RT2 Size S2 & S3					
S2, S3	3RT2.3 3RT2.4	Varistors ¹⁾	24 ... 48	--	■ 3RT2936-1BB00	1200.-	1
			48 ... 127	--	■ 3RT2936-1BC00		1
			127 ... 240	--	■ 3RT2936-1BD00		1
			240 ... 400	--	■ 3RT2936-1BE00		1
			400 ... 600	--	3RT2936-1BF00		1
		Diode assemblies	--	24	3RT2936-1ER00		1
			--	30 ... 250	3RT2936-1ES00		1
		Varistors with LED	127... 240	70 ... 150	3RT2936-1JL00		1
		for 3RT2 Size S2 - RC Element					
S2	3RT2.3	RC Elements	24 ... 48	24 ... 70	3RT2936-1CB00	1200.-	1
			48 ... 127	70 ... 150	3RT2936-1CC00		1
			127 ... 240	150 ... 250	3RT2936-1CD00		1
			240 ... 400	--	3RT2936-1CE00		1
for 3RT2 Size S3 - RC Element							
S3	3RT2.4	RC Elements	24 ... 48	24 ... 70	3RT2946-1CB00	1200.-	1
			48 ... 127	70 ... 150	3RT2946-1CC00		1
			127 ... 240	150 ... 250	3RT2946-1CD00		1
			240 ... 400	--	3RT2946-1CE00		1

1) In 3RT2 universal coil varistor is in-built

Sealable Covers

Size	For Contactor	Type	Unit LP ₹	Std. pkg. (nos.)
S00, S0, S2, S3	3RT2 & 3RH2®	3RT2916-4MA10	245.-	1 pack = 5 units

® Exception: Contactors and contactor relays auxiliary switch block mounted onto the front

Safety main current connectors for 2 contactors

Size	For Contactor	Type	Unit LP ₹	Std. pkg. (nos.)
S00	3RT2	3RA2916-1A	1570.-	1
S0		3RA2926-1A		1
S2		3RA2936-1A		1

■ Stock items



Accessories for 3RT2 and 3RH2 Contactors (S00, S0, S2, S3)

Coil terminal modules for S0, S2, S3

Size	For Contactor	Type	Unit LP ₹	Std. pkg. (nos.)
Connection from top	3RT2	3RT2926-4RA11	445.-	1
Connection from below		3RT2926-4RB11		1
Connection diagonally		3RT2926-4RC11		1



Coupling links for control by PLC

for mounting onto the coil terminals of the contactors

Size	For Contactor	Mounting	Type	Unit LP ₹	Std. pkg. (nos.)
S0	3RT2.2	onto the coil terminals of the contactors	3RH2924-1GP11	2380.-	1
S00, S0, S2, S3	3RT2	onto the contactors	3RH2914-1GP11	2435.-	1




LED modules for indicating the contactor function

Size	For Contactor	Type	Unit LP ₹	Std. pkg. (nos.)
S00 - S3	3RT2	3RT2926-1QT00	810.-	1 pack = 5 units



Links for paralleling

Size	For Contactor	Version	Max. Conductor cross-sections mm ²	Type	Unit LP ₹	Std. pkg. (nos.)
S00	3RT20 1	3-Pole with connection terminal	25 (stranded)	3RT1916-4BB31	540.-	1
S0	3RT20 2		50 (stranded)	3RT2926-4BB31	920.-	1
S2	3RT20 3		120 (stranded)	3RT1936-4BB31	1070.-	1
S3	3RT20 4		185 (stranded)	3RT1946-4BB31	2940.-	1
S00	3RT23 1 & 3RT25 1	4-Pole with connection terminal	25 (stranded)	3RT1916-4BB41	810.-	1



Screw adapters for easy screw fixing

2 units required per contactor

Size	Type	Unit LP ₹	Std. pkg. (nos.)
S0	3RT1926-4P	35.-	1 pack = 10 units



OFF-Delay Devices

Size	Rated control supply voltage U _s V	Type	Unit LP ₹	Std. pkg. (nos.)
3RT2. 1, 3RT2. 2, 3RH2. ...-1BF40	110 AC/DC	3RT2916-2BK01	5415.-	1
3RT2. 1, 3RT2. 2, 3RH2. ...-1BM40	220 / 230 AC/DC	3RT2916-2BL01		1
3RT2. 1, 3RT2. 2, 3RH2. ...-1BB40	24 DC	3RT2916-2BE01		1



Mechanical latching blocks

Size	For Contactor	Rated control supply voltage U _s V	Type	Unit LP ₹	Std. pkg. (nos.)
S0	3RT2.2	24 AC/DC	3RT2926-3AB31	3445.-	1
		110 AC/DC	3RT2926-3AF31		1
		230 AC/DC	3RT2926-3AP31		1



Accessories for 3RT2 and 3RH2 Contactors (S00, S0, S2, S3)



Solid state timer block

for snapping onto the front (S00, S0, S2, S3)

Function	For contactors	Auxiliary contacts	Rated control supply voltage U _s 50/60 Hz V	Time setting range t Sec	Type*	Unit LP ₹	Std. pkg. (nos.)
On-Delay (Varistor integrated)	3RT2 3RH21 3RH24	1CO	24 ... 240 VAC/DC	0.05 ... 100	3RA2813-1AW10	5390.-	1
		1NO + 1NC			3RA2813-1FW10		1
OFF-Delay <u>without</u> auxiliary voltage (Varistor integrated)		1CO	24 ... 240 VAC/DC	0.05 ... 100	3RA2815-1AW10	6435.-	1
		1NO + 1NC			3RA2815-1FW10		1
OFF-Delay <u>with</u> auxiliary voltage (Varistor integrated)		1CO	24 ... 240 VAC/DC	0.05 ... 100	3RA2814-1AW10	7320.-	1
		1NO + 1NC			3RA2814-1FW10		1

Solid state timer block with semiconductor output

for snapping onto the front (S00, S0)

Function	For contactors [#]	Auxiliary contacts	Rated control supply voltage U_c 50/60 Hz V	Time setting range t Sec	Type*	Unit LP ₹	Std. pkg. (nos.)
On-Delay (Varistor integrated)	3RT2 3RH21 3RH24	—	24 ... 240 VAC/DC	0.05 ... 100	3RA2811-1CW10	5865.-	1
OFF-Delay with auxiliary voltage		—	24 ... 240 VAC/DC	0.05 ... 100	3RA2812-1DW10	6910.-	1

Cannot be fitted onto coupling relays.

Also available for 3RT2 S2 & S3 on request

Version	SIRIUS function modules		SIRIUS function modules for IO-Link		SIRIUS function modules for AS-Interface	
	A	Unit LP ₹	B	Unit LP ₹	C	Unit LP ₹
Direct on line starting (S00, S0, S2, S3)	*Pls refer above table for type reference (Solid state timer block with semiconductor output)		3RA2711-1AA00*	5640.-	3RA2712-1AA00*	6205.-
Reversing starting (S00, S0, S2, S3)	for complete feeder refer page no. 23-24		3RA2711-1BA00*	10635.-	3RA2712-1BA00*	11695.-
Star delta starting (S00, S0, S2, S3)	3RA2816-0EW20	11150.-	3RA2711-1CA00*	16465.-	3RA2712-1CA00*	18165.-

*For ordering with spring type terminals, please replace 8th digit from '1' to '2'

Accessories for 3 Pole, 3RT2 & 3RT1 Contactors

Surge Suppressor for 3Pole 3RT1 (S6..S12)

Size	Version	AC Operation	DC Operation	Type	Unit LP ₹	Std. pkg. (nos.)
		Rated control supply voltage (U ₂)				
		V AC	V DC			
S6, S10, S12	RC Elements*	24 ... 48	24 ... 70	3RT1956-1CB00	2085.-	1
		48 ... 127	70 ... 150	3RT1956-1CC00		1
		127 ... 240	150 ... 250	3RT1956-1CD00		1
		240 ... 400	–	3RT1956-1CE00		1
		400 ... 600	–	3RT1956-1CF00		1



Contactors coils (Size S6 to S12) comes with in-built varistor

* for connecting to with-drawable coils with screw terminal type connection

Box terminal blocks

Size	For Contactor	Version	Type	Unit LP ₹	Std. pkg. (nos.)
S6	3RT105	For round and ribbon cables (Upto 70 mm ²)	3RT1955-4G	2005.-	1
		For round and ribbon cables (Upto 120 mm ²)	3RT1956-4G	2840.-	1
		Auxiliary conductor connection for box terminals	3TX7500-0A	1115.-	1
S10 / S12	3RT106 & 3RT107	Upto 240 mm ² with auxiliary conductor connection	3RT1966-4G	8030.-	1



Covers


Terminal covers for box terminals

Size	For Contactor	Version	Type	Unit LP ₹	Std. pkg. (nos.)
S3	3RT204	3 Pole	3RT2946-4EA2	665.-	1
S6	3RT105	Length of 25 mm	3RT1956-4EA2	1070.-	1
S10 / S12	3RT106 & 3RT107	Length of 30 mm	3RT1966-4EA2	1885.-	1
Terminal covers for cable lugs and busbar connection					
S3	3RT204	Length of 55 mm	3RT1946-4EA1	955.-	1
S6	3RT105	Length of 100 mm	3RT1956-4EA1	1830.-	1
S10 / S12	3RT106 & 3RT107	Length of 120 mm	3RT1966-4EA1	2415.-	1
Busbar cover between contactor and 3RB2 overload relay or wiring module for contactor assemblies					
S10 / S12	3RT106 & 3RT107	Length of 42 mm	3RT1966-4EA3	1605.-	1
For busbar cover of the flat line connectors for reversing and wye-delta assemblies					
S6	3RT105	Length of 38 mm	3RT1956-4EA4	1475.-	1



Sealable Covers

Size	For Contactor	Type	Unit LP ₹	Std. pkg. (nos.)
S6, S10, S12	3RT105, 3RT106 & 3RT107	3RT1926-4MA10	110.-	1 pack = 5 units



Accessories for 3 Pole, 3RT2 & 3RT1 Contactors

Links for paralleling

Size	For Contactor	Version	Type	Unit LP ₹	Std. pkg. (nos.)
S3	3RT204	3-Pole with through hole (Star Jumpers)	3RT1946-4BB31	2940.-	1
S6	3RT1		3RT1956-4BA31	1605.-	1
S10 / S12	3RT1		3RT1966-4BA31	2140.-	1



Accessories for 3RT12

Description	Type	Unit LP ₹	Std. pkg. (nos.)
Line voltage surge suppressors			
upto 690V AC	3RT1966-1PV3	9595.-	1
upto 1000V AC	3RT1966-1PV4	14020.-	1
Auxiliary contact blocks			
second, 2NO	3RH1921-1KA20	1075.-	1
second, 1NO+1NC	3RH1921-1KA11		1
second, 2NC	3RH1921-1KA02		1
Mechanical interlock mechanism	3RA1954-2A	3065.-	1
Coil surge suppressor			
RC element, for 110V-127V coil	3RT1956-1CC00	2085.-	1
RC element, for 220V-240V coil	3RT1956-1CD00		1

Accessories for 4 Pole Contactor - 3RT23 / 3RT13

Mechanical interlock for 3RT23

Contactor size	Type	Description	Unit LP ₹	Std. pkg. (nos.)
S00-S00	3RA2912-2H	Mechanical interlock & 2 Connecting Clips	535.-	1
S0-S0	3RA2922-2H	Mechanical interlock & 2 Connecting Clips	535.-	1
S2-S2 ¹⁾	3RA2934-2B	Mechanical interlock	605.-	1
	3RA2932-2G	2x Connecting Clips	295.-	10
S3-S3 ¹⁾	3RA2934-2B	Mechanical interlock	605.-	1
	3RA2942-2G	2x Connecting Clips	340.-	10

1) for 3RT23 S2 & S3 reversing combination both Mechanical interlock & 2x Connecting Clips need to be ordered


Mechanical interlock for 3RT13

Contactor size	Type	Description	Unit LP ₹	Std. pkg. (nos.)
S6-S6	3RA1954-3A	Mechanical interlock for 3RT13	3065.-	1
S10-S10				
S12-S12				

Terminal Covers for 3RT13

Contactor size	Type	Description	Unit LP ₹	Std. pkg. (nos.)
S6	3RT1956-4EB10	for 3RT135..	2705.-	1
S10	3RT1966-4EB10	for 3RT136..		
S12	3RT1976-4EB10	for 3RT137..		



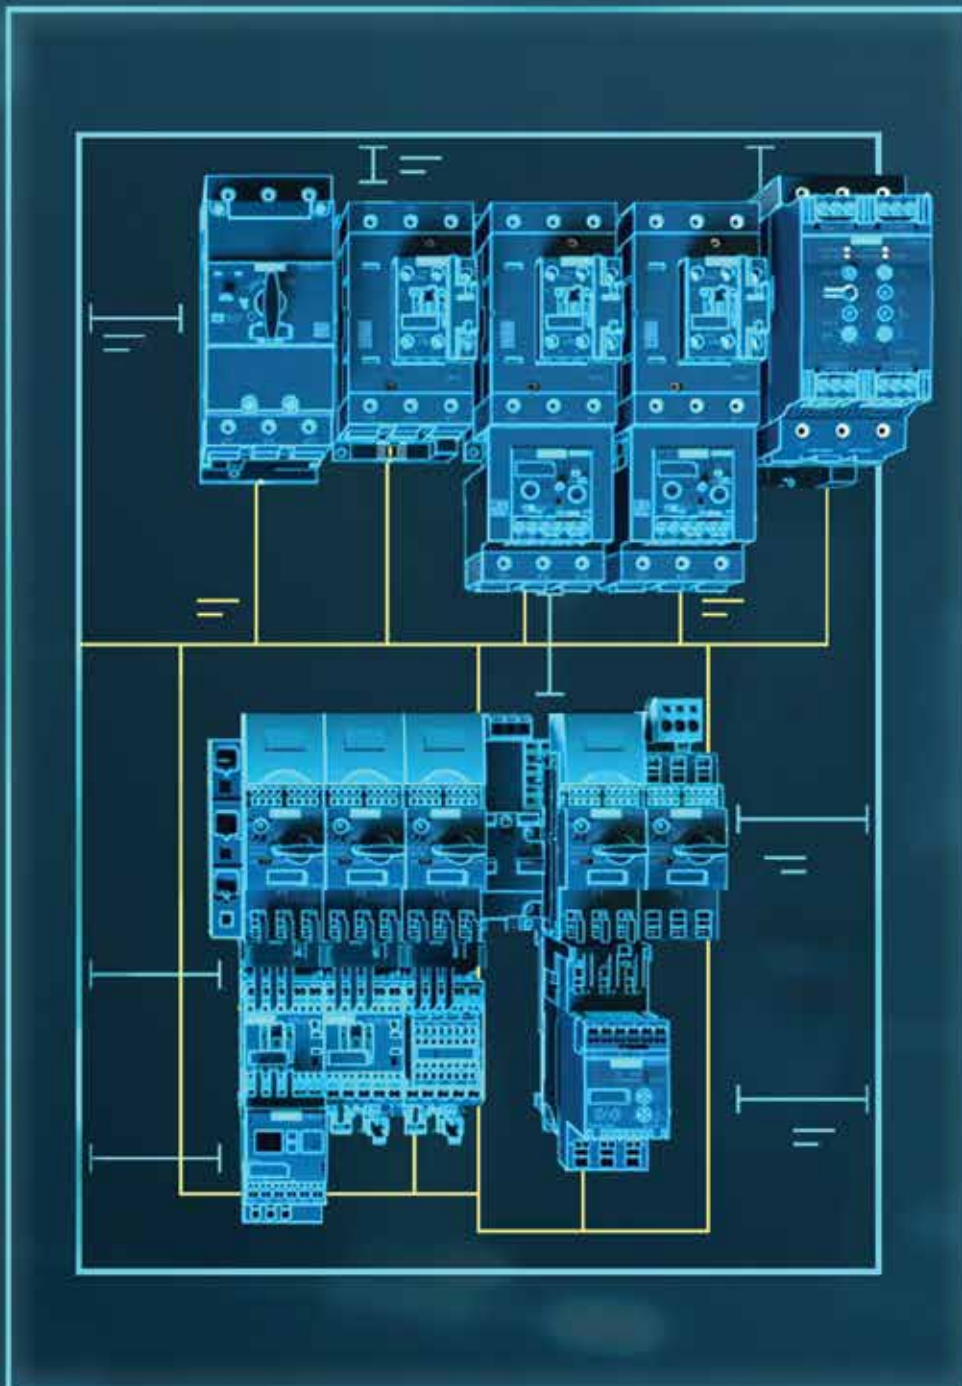

Save up to 30%
more space using compact
switching devices

www.siemens.com/SIRIUS

SIEMENS





3RA Load Feeders



Direct On-Line Starters

For snapping onto standard mounting rails or for screw mounting

Size of MPCB / contactor	MPCB	+	Contactor	+	Link module	+	Standard mounting rail adaptor	Final Assembled Unit
S00 / S00		+	 3RT2 AC and DC coil	+	 3RA1921-1DA00	+	Not required	
(S00, S0) / S0		+	 3RT2 AC coil DC coil	+	 3RA2921-1AA00 3RA2921-1BA00	+	Not required	
S2 / S2		+	 3RT2 AC and DC coil	+	 3RA2931-1AA00	+	 3RA2932-1AA00 (Optional)	
S3 / S3		+	 3RT2 AC and DC coil	+	 3RA1941-1AA00	+	 3RA2942-1AA00	

Link modules, single-unit packaging – For mechanical and electrical connection between contactor and motor protection circuit-breaker with screw terminals

Method of operation	Size of contactor	Size of MPCB	Type	Unit LP ₹	Std. pkg. (nos.)
AC/DC	S00	S00	3RA1921-1DA00	565.-	1
	S2	S2	3RA2931-1AA00	1860.-	1
	S3	S3	3RA1941-1AA00	1910.-	1
AC	S0	S00/S0	3RA2921-1AA00	565.-	1
DC	S0	S00/S0	3RA2921-1BA00	565.-	1


Standard mounting rail adaptor

Size of MPCB	Size of contactor	Type	Unit LP ₹	Std. pkg. (nos.)
S2	S2	3RA2932-1AA00	1930.-	1
S3	S3	3RA2942-1AA00	2645.-	1


Accessories for 3RT2 Contactors

S00, S0 - Mechanical Interlock & Installation kit for reversing contactors

S00 - S00

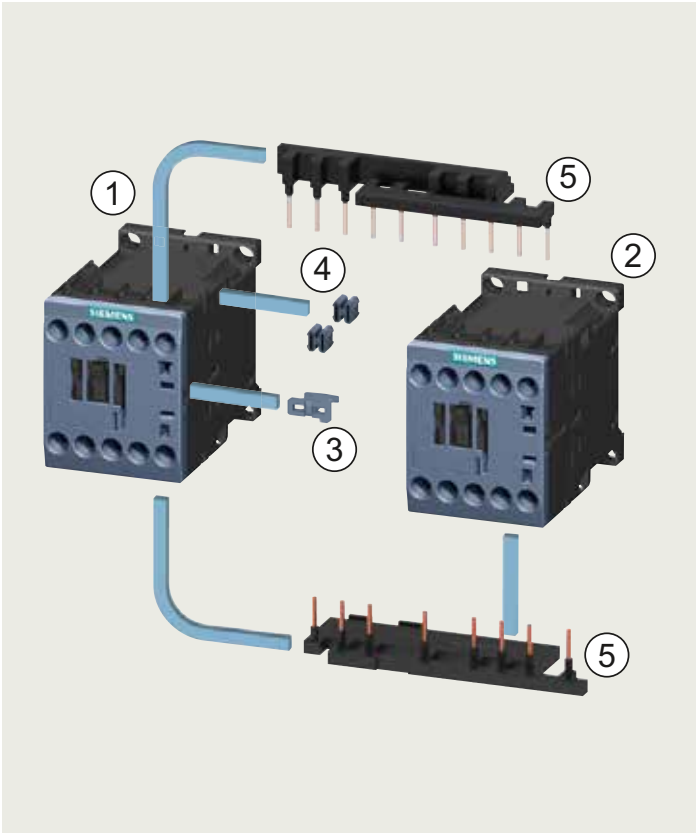

S0 - S0

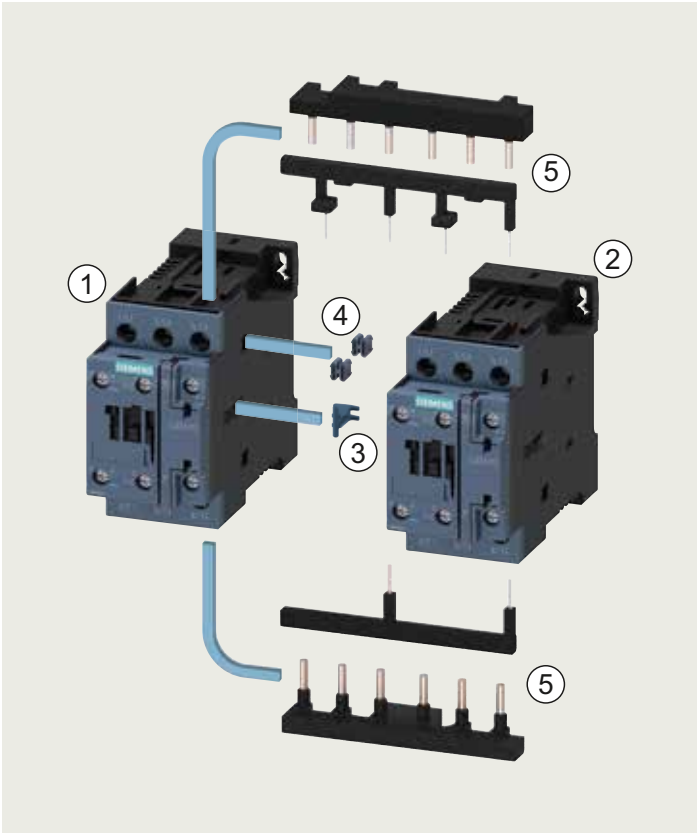

Individual Components

- ① ② Power Contactor Size S00 - S00 or S0 - S0
- ③ Lateral mounted mechanical interlock
- ④ 2 Nos Connecting clips for two contactors
- ⑤ Wiring modules on the top & bottom


S. No.	Description	Contactor Size	Type*	Unit LP ₹ (per unit / set)	Std. pkg. (nos.)
3, 4, 5	<u>Assembly Kit</u> Each kit contains: Mechanical interlock, 2 Connecting clips for 2 contactors, wiring modules on the top & bottom	S00-S00	3RA2913-2AA1	1085.-	1 Unit
		S0-S0	3RA2923-2AA1	1625.-	
3, 4	Each set contains: Mechanical interlock & 2 Connecting clips	S00-S00	3RA2912-2H	535.-	1 pack (1 pack = 10 Sets)
		S0-S0	3RA2922-2H	535.-	

* For ordering installation kit with spring type terminals please replace last digit from '1' to '2'



Accessories for 3RT2 Contactors

S2 - S2 or S3 - S3 - Mechanical Interlock & Assembly kit for reversing contactors

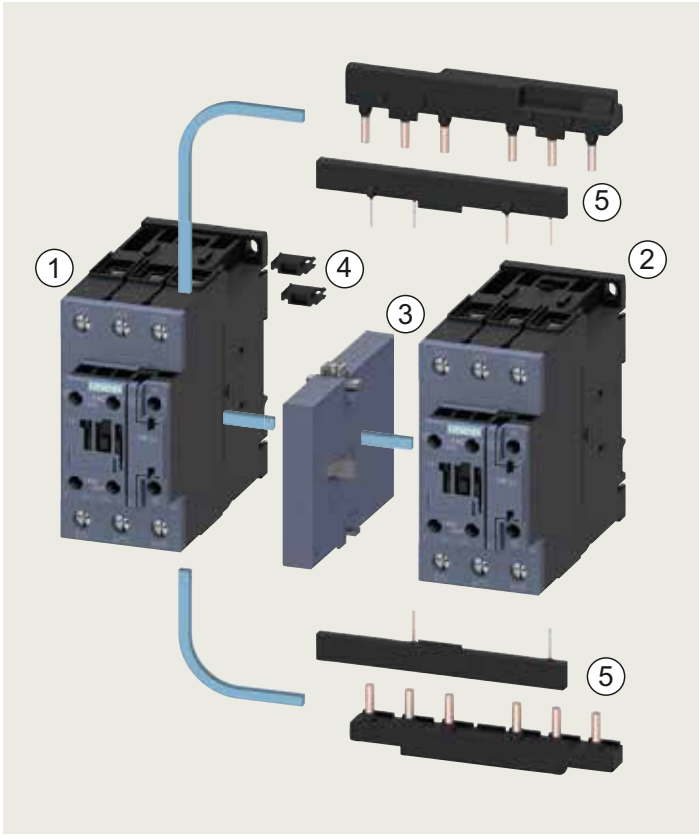

Individual Components

- ① ② Power Contactor Size S2 - S2 or S3 - S3
- ③ Lateral mounted mechanical interlock
- ④ 2 Nos Connecting clips for two contactors
- ⑤ Wiring modules on the top & bottom

S. No.	Description	Contactor Size	Type	Unit LP ₹ (per unit / set)	Std. pkg. (nos.)
4, 5	Assembly Kit Each kit contains: • Two connecting clips for two contactor • Wiring modules on the top & bottom for connecting the main and auxiliary current paths	S2 - S2	3RA2933-2AA1	1795.-	1 Unit
		S3 - S3	3RA2943-2AA1	3590.-	1 Unit
3	Mechanical interlock	S2 - S2	3RA2934-2B	605.-	1 Unit
		S3 - S3			
4	Connecting Clips for 3Pole Contactors Two connectors for two contactors	S2 - S2	3RA2932-2C	295.-	10 Unit
		S3 - S3	3RA2932-2D	295.-	

* Assembly kit only available for 3 Pole contactors only



4, 5




3



4

Accessories for 3RT1 Contactors

S6 - S6 - Mechanical Interlock & Installation kit for reversing contactors

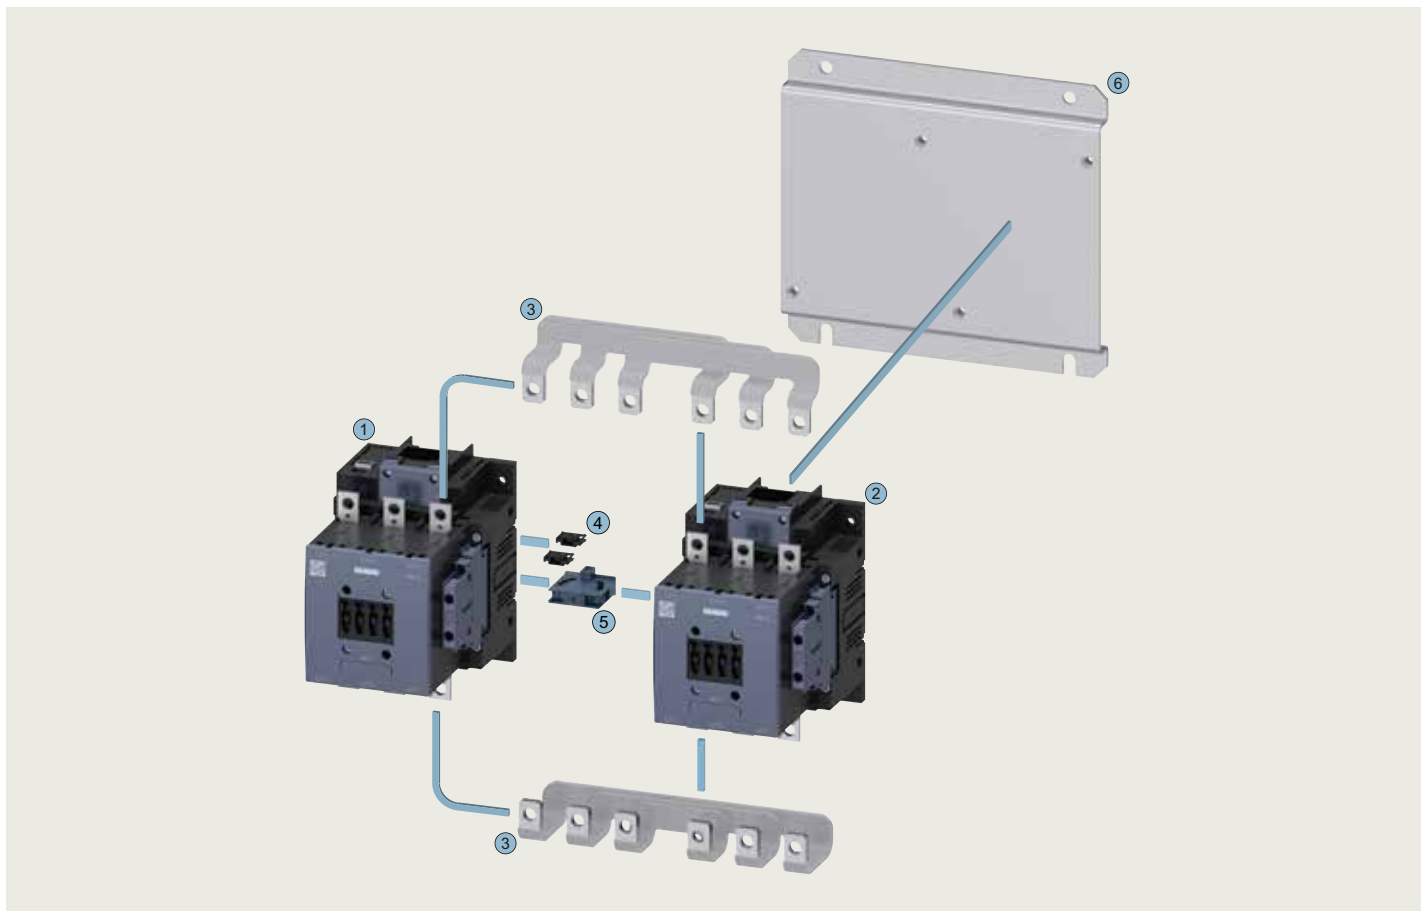


Individual Components

- ① ② Power Contactor Size S6 - S6
- ③ Assembly Kit
- ④ Two connectors for two contactors
- ⑤ Mechanical interlock
- ⑥ Base plate for reversing contactor assemblies

S. No.	Description	Contactor Size	Type	Unit LP ₹ (per unit / set)	Std. pkg. (nos.)
3	<u>Assembly Kit</u> Each kit contains: • Wiring modules on the top & bottom for <u>contactors without box terminals</u> for connecting the main and auxiliary current paths, electrical interlock included (NC Contact interlock)	S6 - S6	3RA1953-2A	24800.-	1 Unit
4	Two connectors for two contactors	S6 - S6	3RA1932-2D	285.-	1 Pack (1 pack = 10 sets)
5	Mechanical interlock	S6 - S6	3RA1954-2A	3065.-	1 Unit
6	Base plate for reversing contactor assemblies	S6 - S6	3RA1952-2A	4630.-	1 Unit

Accessories for 3RT1 Contactors

S10 - S10 or S12 - S12 - Mechanical Interlock & Installation kit for reversing contactors

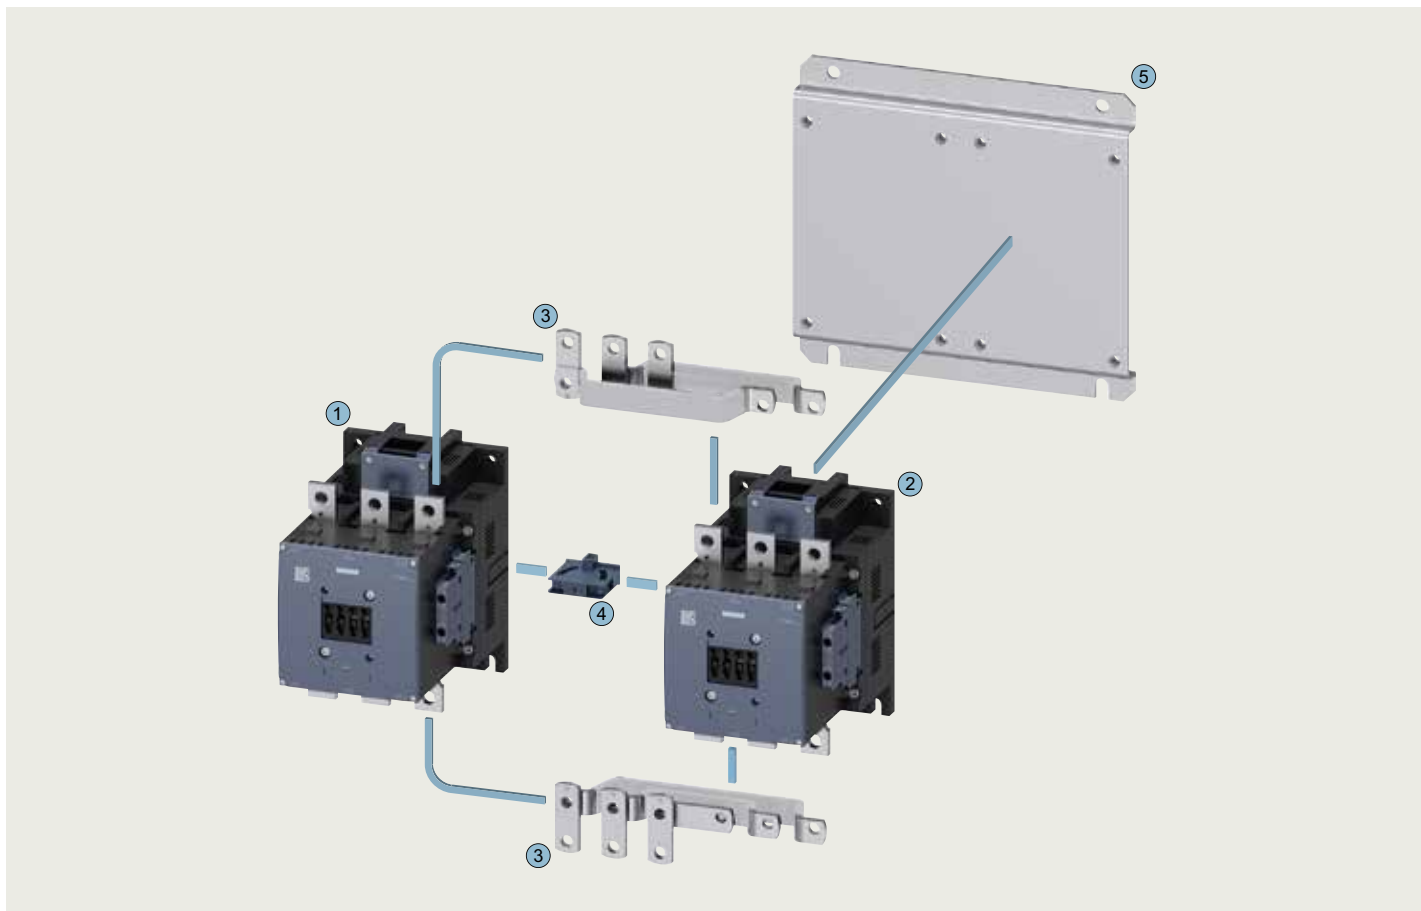


Individual Components

- ① ② Power Contactor Size S10 - S10 or S12 - S12
- ③ Assembly Kit
- ④ Mechanical interlock
- ⑤ Base plate for reversing contactor assemblies

S. No.	Description	Contactor Size	Type	Unit LP ₹ (per unit / set)	Std. pkg. (nos.)
3	<u>Assembly Kit</u> Each kit contains: • Wiring modules on the top & bottom for <u>contactors without box terminals</u> for connecting the main and auxiliary current paths, electrical interlock included (NC Contact interlock)	S10 - S10	3RA1963-2A	26445.-	1 Unit
		S12 - S12	3RA1973-2A	28105.-	1 Unit
4	Mechanical interlock	S10 - S10	3RA1954-2A	3065.-	1 Unit
		S12 - S12			
5	Base plate for reversing contactor assemblies	S10 - S10	3RA1962-2A	6950.-	1 Unit
		S12 - S12	3RA1972-2A	8105.-	1 Unit

Accessories for 3RT2 Contactors

S00-S00-S00 - Mechanical Interlock & Installation kit for star delta contactor assembly

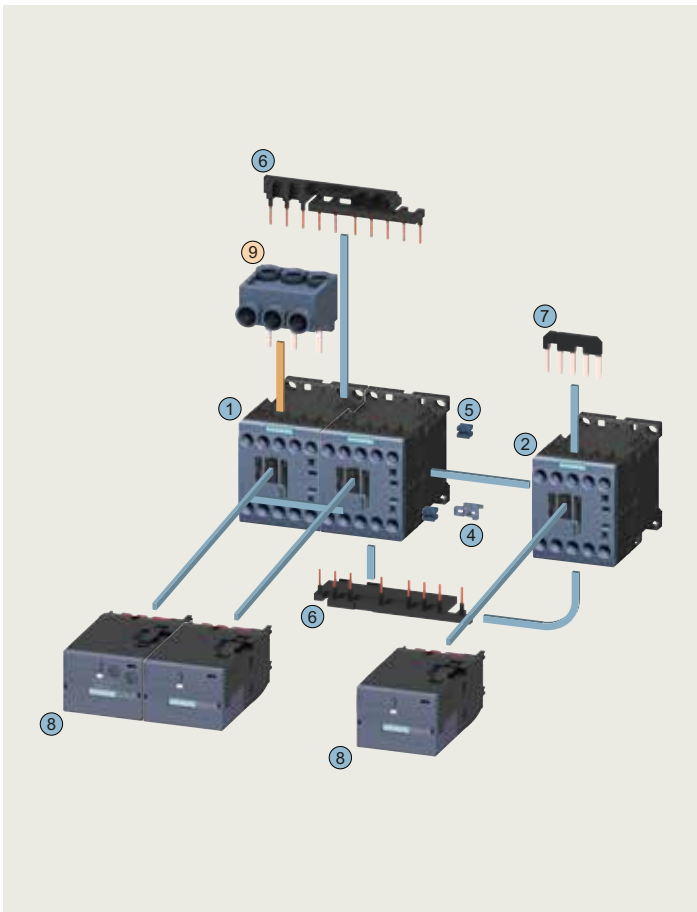

Individual Components

- ① ② ③ Power Contactors:
Line: S00
Delta: S00
Star: S00

Assembly kit : ④ ... ⑦

- ④ Mechanical interlock
⑤ 4 Nos Connecting clips for contactors
⑥ Wiring modules on the top & bottom for connecting the main and the control path
⑦ Star Jumper
⑧ Function Module for Star-Delta
⑨ 3-phase feeder terminal

S. No.	For Contactor	Description	Type	Unit LP ₹	Std. pkg. (nos.)
4...7	3RT20 1	Assembly Kit Each kit contains: Mechanical interlock 4 Connecting clips, wiring modules on the top & bottom, Star jumper	■ 3RA2913-2BB1*	1110.-	1 Unit
8	3RT20 1	Function module	■ 3RA2816-0EW20	11150.-	1 Unit
9	3RT20 1	3-phase feeder terminal (for Screw type contactors only)	■ 3RA2913-3K	805.-	5 Unit

* For ordering installation kit with spring type terminals please replace last digit from '1' to '2'



4...7



8




9

■ Stock items

LP - List Price

Accessories for 3RT2 Contactors

S0-S0-S0 - Mechanical Interlock & Installation kit for star delta contactor assembly

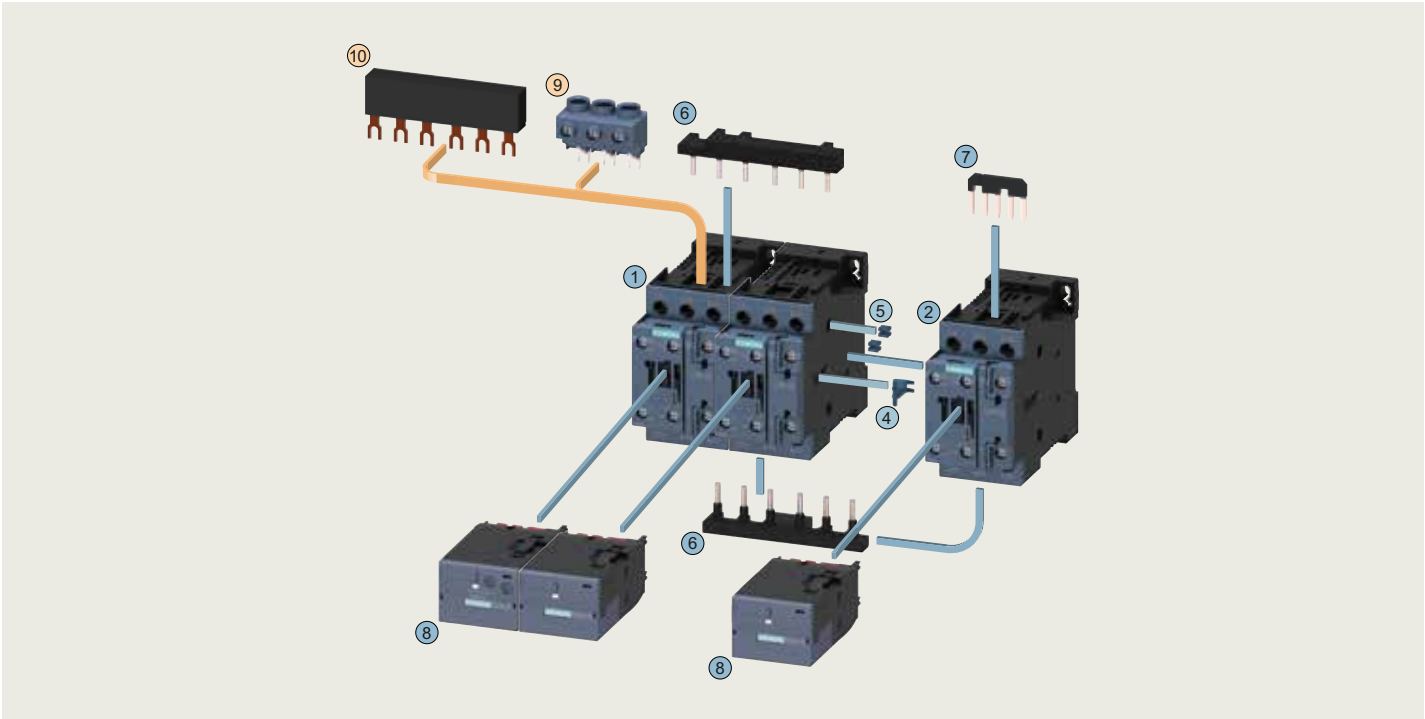

Individual Components

- ① ② ③

Power Contactors:
Line: S0
Delta: S0
Star: S0
- ⑧

Function Module for Star-Delta
- ⑨

3-phase feeder terminal
- ⑩

3-phase busbar

Assembly kit : ④ ... ⑦

- ④

Mechanical interlock
- ⑤

4 Nos Connecting clips for contactors
- ⑥

Wiring modules on the top & bottom for connecting the main and the control path
- ⑦

Star Jumper

S. No.	For Contactor	Description	Type	Unit LP ₹	Std. pkg. (nos.)
4...7	3RT20 2	Installation Kit Each kit contains: Mechanical interlock 4 Connecting clips, wiring modules on the top & bottom, Star jumper	■ 3RA2923-2BB1*	1770.-	1 Unit
8	3RT20 2	Function module	■ 3RA2816-0EW20	11150.-	1 Unit
9	3RT20 2	3-phase feeder terminal (for Screw type contactors only)	■ 3RV2925-5AB	1845.-	1 Unit
10	3RT20 2	3-phase busbar (for Screw type contactors only)	■ 3RV1915-1AB	1560.-	1 Unit

* For ordering installation kit with spring type terminals please replace last digit from '1' to '2'



4...7



8



9




10

■ Stock items

Accessories for 3RT2 Contactors

S2-S2-S0/S2 - Mechanical Interlock & Installation kit for star delta contactor assembly

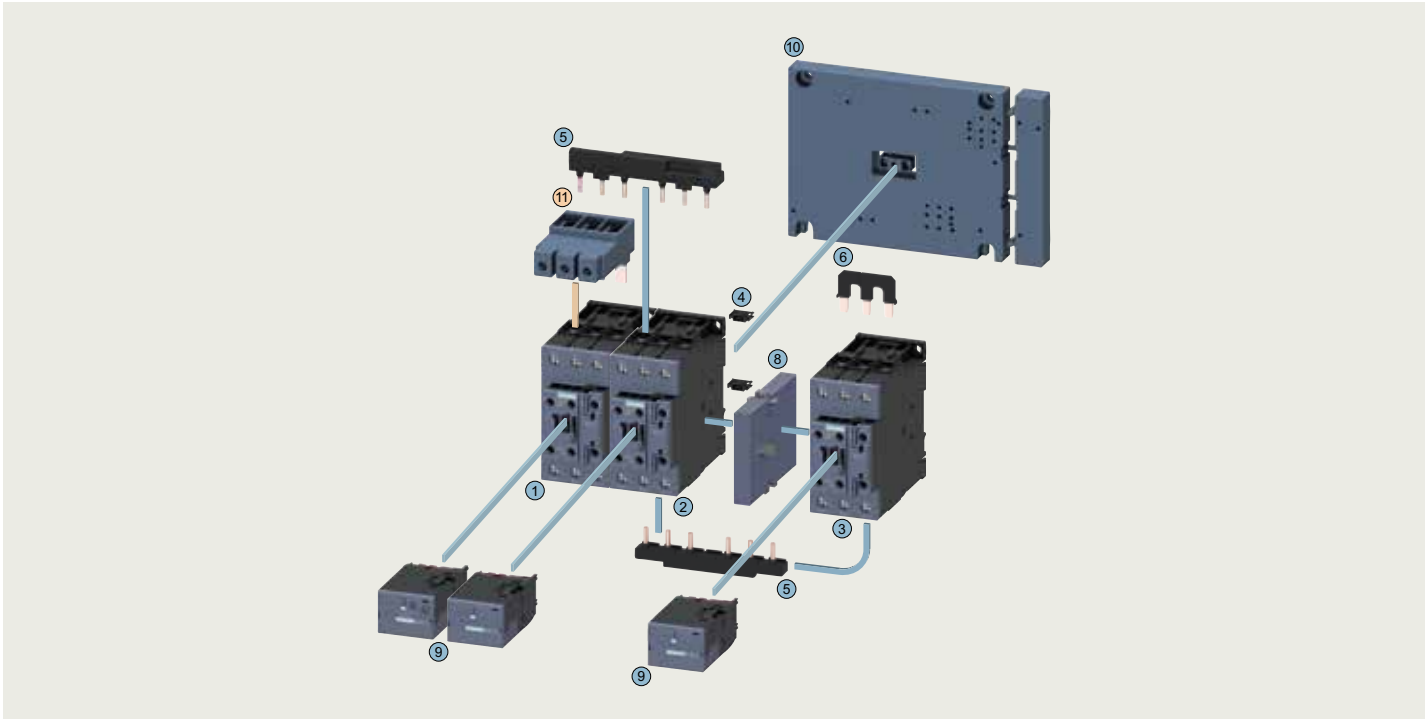

The figure shows the version with screw terminals in S2-S2-S2

Individual Components

- ① ② ③ Contactors

④ ... ⑦ Assembly kit comprising:
S2-S2-S2: 3RA2933-2BB1
S2-S2-S0: 3RA2933-2C

④ Connectors for three contactors

⑤ Wiring modules on top and bottom for connecting the main and auxiliary circuits

⑥ Star jumper
- ⑦ Cable for connecting the A2 coil contact from the line contactor with the A2 coil contact of the delta contactor (not shown in the drawing)


⑧ Mechanical interlock

⑨ Function modules for star-delta (wye-delta)

⑩ Base plate star-delta


⑪ 3-phase feeder terminal

S. No.	For Contactor	Type	LP ₹ (per unit / set)	Std. pkg. (nos.)
10	Base plate	3RA2932-2F	2295.-	1 Unit
8	Mechanical interlock, lateral	3RA2934-2B	605.-	1 Unit
4...7	Assembly Kit: S2-S2-S2	3RA2933-2BB1	2685.-	1 Unit
	Assembly Kit: S2-S2-S0	3RA2933-2C	1970.-	1 Unit
9	Functional Module	3RA2816-0EW20	11150.-	1 Unit

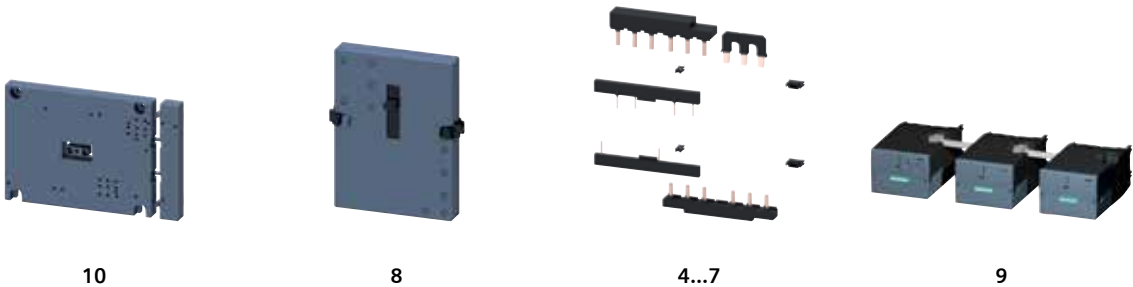

Accessories for 3RT2 Contactors

S3-S3-S2/S3 - Mechanical Interlock & Installation kit for star delta contactor assembly

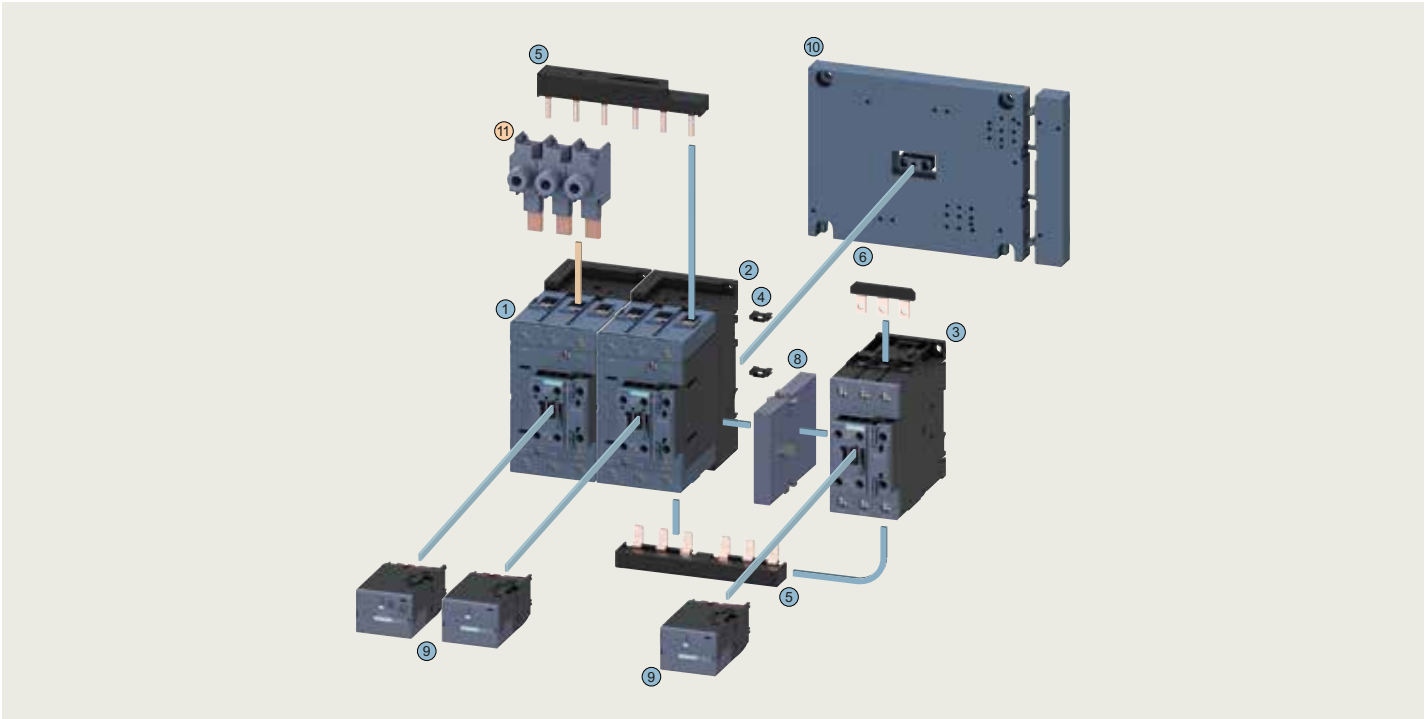

The figure shows the version with screw terminals in S3-S3-S2

Individual Components

- ① ② ③

 Contactors
- ④ ... ⑦

 Assembly kit comprising:
S3-S3-S3: 3RA2943-2BB
S3-S3-S2: 3RA2943-2C
- ④

 Connectors for three contactors
- ⑤

 Wiring modules on top and bottom for connecting the main and auxiliary circuits
- ⑥

 Star jumper
- ⑦

 Cable for connecting the A2 coil contact from the line contactor with the A2 coil contact of the delta contactor (not shown in the drawing)
- ⑧


 Mechanical interlock
- ⑨

 Function modules for star-delta (wye-delta)
- ⑩

 Base plate star-delta
- ⑪


 3-phase feeder terminal

S. No.	For Contactor	Type	LP ₹ (per unit / set)	Std. pkg. (nos.)
10	Base plate	3RA2942-2F	3210.-	1 Unit
8	Mechanical interlock, lateral	3RA2934-2B	605.-	1 Unit
4...7	Assembly Kit: S3-S3-S3	3RA2943-2BB1	2470.-	1 Unit
	Assembly Kit: S3-S3-S2	3RA2943-2C	2735.-	1 Unit
9	Functional Module	3RA2816-0EW20	11150.-	1 Unit

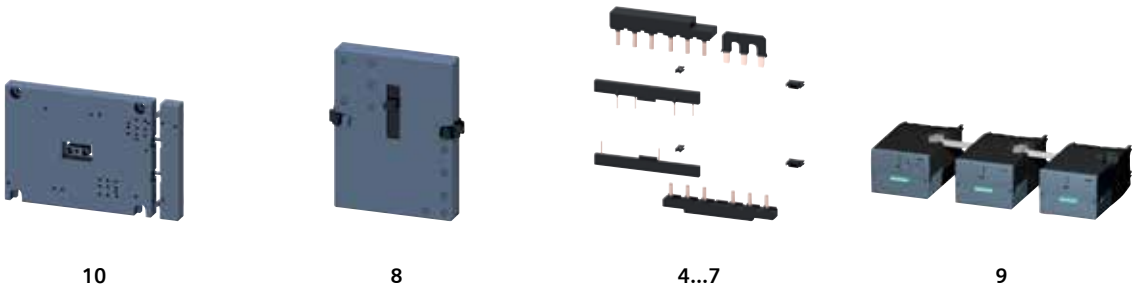

3RV29 Infeed system

The 3RV29 infeed system is a convenient means of energy supply and distribution for a group of several motor starter protectors or complete load feeders with a screw or spring-type connection in sizes S00 and S0.

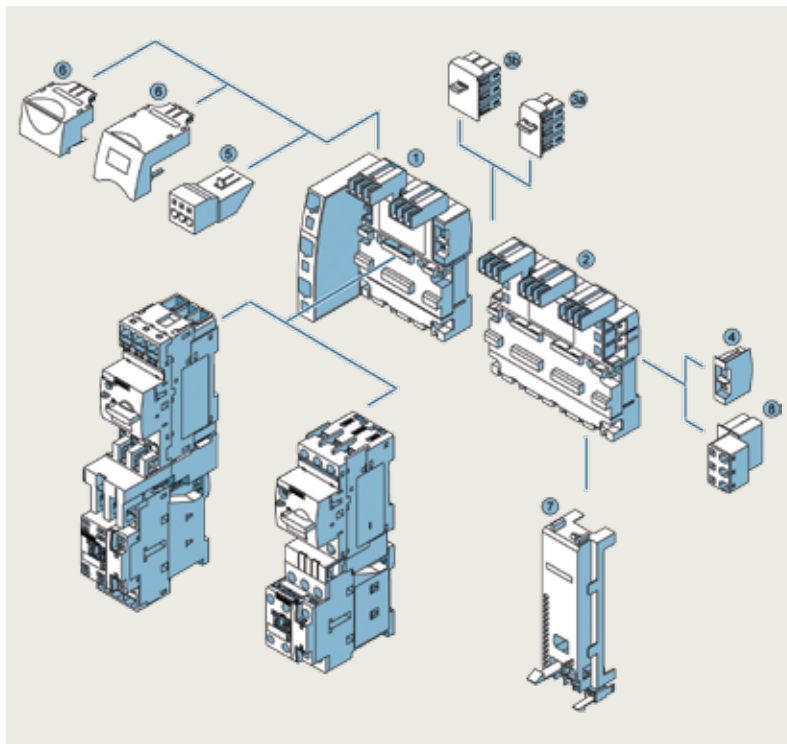

Individual Components

- | | |
|---------------------------------------|------------------------------------|
| ① 3-phase busbar with infeed | ⑤ Terminal block for device infeed |
| ② 3-phase busbar for system expansion | ⑥ Plug-in connector |
| ③a Expansion plug | ⑦ Contactor base |
| ③b Extra-wide expansion plug | ⑧ Terminal block |
| ④ End cover | |
- Maximum current carrying capacity of 63 A
 - Enables the integration of MPCB's, 1-phase, 2-phase and 3-phase components such as 5SY miniature circuit breakers or SIRIUS relay components.
 - Approved in accordance with IEC to 500 V.
 - UL-approved and authorized for Type E starter and Type F starter.

Legend	Type of accessory	Version	For 3RV20, 3RV23, 3RV24 MPCB only	Type	Unit LP ₹	Std. pkg. (nos.)
①*	Three-phase busbars with infeed (incl. 3RV2917-6A end cover)	For 2 motor starter protectors with screw or spring-type terminals With infeed on the left	S00, S0	3RV2917-1A	2410.-	1
		For 2 motor starter protectors with screw or spring-type terminals With infeed on the Right	S00, S0	3RV2917-1E	2410.-	1
②+	Three-phase busbars for system expansion (incl. 3RV2917-5BA00 expansion plug)	For 2 motor starter protectors with screw or spring-type terminals	S00, S0	3RV2917-4A	1455.-	1
		For 3 motor starter protectors with screw or spring-type terminals	S00, S0	3RV2917-4B	1940.-	1
③+	Expansion Plug (as spare part)			3RV2917-5BA00	490.-	1
	Extra-wide expansion plugs (as accessory)			3RV2917-5E	1090.-	1
④+	End covers (as spare part)			3RV2917-6A	60.-	10
⑤+	Terminal blocks	for device infeed		3RV2917-5FA00	1655.-	1
⑥*	Plug-in connectors to make contact with motor starter protectors	For spring-type terminals	S00	3RV2917-5AA00	425.-	1
			S0	3RV2927-5AA00	425.-	1
		For Screw-type terminals	S00	3RV2917-5CA00	425.-	1
			S0	3RV1927-5AA00	510.-	1
⑦^	Contactor bases for mounting direct-on-line or reversing starters	For contactors	contactors S00, S0	3RV2927-7AA00	355.-	1
⑧+	Terminal blocks	for integration of single-phase, two-phase and three-phase components		3RV2917-5D	1740.-	1

* Required

+ Optional

^ Required for Reversing DOL

Reversing Contactor Assemblies - 3RA23



S00-S00

S0-S0

S2-S2

S3-S3

Screw terminals

Size	AC-3 operational current I _e upto 415V A	Motor rating at 415V, 50Hz kW	AC Coil				DC Coil			
			Rated control supply voltage U _s at 50/60Hz V AC	Type*	Unit LP ₹	Std. pkg. (nos.)	Rated control supply voltage U _s V DC	Type*	Unit LP ₹	Std. pkg. (nos.)
S00	7	3	230	3RA2315-8XB30-1AP0	6660.-	1	24	3RA2315-8XB30-1BB4	8835.-	1
	9	4	230	3RA2316-8XB30-1AP0	7025.-	1	24	3RA2316-8XB30-1BB4	9550.-	1
	12	5.5	230	3RA2317-8XB30-1AP0	7345.-	1	24	3RA2317-8XB30-1BB4	10680.-	1
	16	7.5	230	3RA2318-8XB30-1AP0	8700.-	1	24	3RA2318-8XB30-1BB4	11485.-	1
S0	12	5.5	230	3RA2324-8XB30-1AL2	8695.-	1	24	3RA2324-8XB30-1BB4	10700.-	1
	17	7.5	230	3RA2325-8XB30-1AL2	8890.-	1	24	3RA2325-8XB30-1BB4	12270.-	1
	25	11	230	3RA2326-8XB30-1AL2	10725.-	1	24	3RA2326-8XB30-1BB4	16265.-	1
	32	15	230	3RA2327-8XB30-1AL2	19670.-	1	24	3RA2327-8XB30-1BB4	31855.-	1
	38	18.5	230	3RA2328-8XB30-1AL2	27595.-	1	24	3RA2328-8XB30-1BB4	36020.-	1
S2	50	22	230	3RA2336-8XB30-1AL2	31110.-	1	20...33	3RA2336-8XB30-1NB3 [€]	47865.-	1
	65	30	230	3RA2337-8XB30-1AL2	41675.-	1	20...33	3RA2337-8XB30-1NB3 [€]	53495.-	1
	80	37	230	3RA2338-8XB30-1AL2	52365.-	1	20...33	3RA2338-8XB30-1NB3 [€]	63405.-	1
S3	95	45	230	3RA2346-8XB30-1AL2	65445.-	1	20...33	3RA2346-8XB30-1NB3 [€]	73585.-	1
	110	55	230	3RA2347-8XB30-1AL2	75220.-	1	20...33	3RA2347-8XB30-1NB3 [€]	80955.-	1

Star Delta Contactor Assemblies - 3RA24



S00-S00-S00

S0-S0-S0

S2-S2-S2

S3-S3-S2

Screw terminals

Size	AC-3 operational current I _e upto 415V A	Motor rating at 415V, 50Hz kW	AC Coil [§]				DC Coil [®]			
			Rated control supply voltage U _s at 50/60Hz V AC	Type*	Unit LP ₹	Std. pkg. (nos.)	Rated control supply voltage U _s V DC	Type*	Unit LP ₹	Std. pkg. (nos.)
S00-S00-S00	12	5.5	230	3RA2415-8XF31-1AP0	14955.-	1	24	3RA2415-8XF31-1BB4	17545.-	1
	17	7.5	230	3RA2416-8XF31-1AP0	15745.-	1	24	3RA2416-8XF31-1BB4	19100.-	1
	25	11	230	3RA2417-8XF31-1AP0	16500.-	1	24	3RA2417-8XF31-1BB4	20405.-	1
S0-S0-S0	25	11	230	3RA2423-8XF32-1AL2	18465.-	1	24	3RA2423-8XF32-1BB4	22750.-	1
	32/40	15/18.5	230	3RA2425-8XF32-1AL2	21240.-	1	24	3RA2425-8XF32-1BB4	68065.-	1
	50	22	230	3RA2426-8XF32-1AL2	30780.-	1	24	3RA2426-8XF32-1BB4	45590.-	1
S2-S2-S0	50/65	22/30	230	3RA2434-8XF32-1AL2	41565.-	1	20...33	3RA2434-8XF32-1NB3 [€]	62430.-	1
	80	37	230	3RA2435-8XF32-1AL2	43375.-	1	20...33	3RA2435-8XF32-1NB3 [€]	71220.-	1
	86	45	230	3RA2436-8XF32-1AL2	52160.-	1	20...33	3RA2436-8XF32-1NB3 [€]	76735.-	1
S2-S2-S2	115	55	230	3RA2437-8XF32-1AL2	63575.-	1	20...33	3RA2437-8XF32-1NB3 [€]	82825.-	1
	150	75	230	3RA2445-8XF32-1AL2	69630.-	1	20...33	3RA2445-8XF32-1NB3 [€]	91115.-	1
S3-S3-S2	160	90	230	3RA2446-8XF32-1AL2	93300.-	1	20...33	3RA2446-8XF32-1NB3 [€]	109335.-	1

* For ordering above assembly with Spring type terminals, please replace 13th digit from "1 to 2" for S00, S0

€ - Universal operation AC / DC

Above assemblies are also available as "ready to assemble kit" please refer page no. 23-30

Please contact nearest sales office for other coil voltages and with communication interface



Genuine Siemens spares

Buy from our authorised channel partner

Spares coils

Magnetic coils for 3RT2 (S0, S2, S3)



Size	AC Coil					Universal Coil (AC/DC)				
	Contactor type	Rated control supply voltage U_s at 50/60 Hz V AC	Type	Unit LP ₹	Std. pkg. (nos.)	Contactor type	Rated control supply voltage U_s V DC	Type	Unit LP ₹	Std. pkg. (nos.)
S0	3RT20 23 3RT20 24 3RT20 25	24V	3RT2924-5AC21	815.-	1					
		110V	3RT2924-5AG21		1					
		230V	3RT2924-5AL21		1					
		400V, 50Hz	3RT2924-5AV01		1					
	3RT20 26 3RT20 27 3RT20 28 3RT23 25 3RT23 26 3RT25 26	24V	3RT2926-5AC21		1					
		110V	3RT2926-5AG21		1					
		230V	3RT2926-5AL21		1					
		400V, 50Hz	3RT2926-5AV01		1					
S2	3RT20 3 3RT23 3 3RT25 3	24V	3RT2934-5AC21	3650.-	1	3RT20 3 3RT23 3 3RT25 3	20 ... 33	3RT2934-5NB31	4625.-	1
		110V	3RT2934-5AG21		1		83 ... 155	3RT2934-5NF31		1
		230V	3RT2934-5AL21		1		175 ... 280	3RT2934-5NP31		1
S3	3RT20 4 3RT23 4 3RT25 4 3RT24 4	24V	3RT2944-5AB01	3830.-	1	3RT20 4 3RT23 4 3RT25 4 3RT24 4	20 ... 33	3RT2944-5NB31	5200.-	1
		110V	3RT2944-5AF01		1		83 ... 155	3RT2944-5NF31		1
		230V	3RT2944-5AP01		1		175 ... 280	3RT2944-5NP31		1

For 24 V DC PLC output/PLC relay output,
with remaining lifetime indicator (RLT)
[Withdrawable coil with lateral solid-state module]

Size	AC Coil				
	Contactor type	Rated control supply voltage U_s at 40 to 60Hz AC, DC V AC/DC	Type	Unit LP ₹	Std. pkg. (nos.)
S6	3RT10 5 3RT14 5	96...127V AC/DC	3RT1955-5PF31	24505.-	1
		200...277V AC/DC	3RT1955-5PP31	24505.-	1
S10	3RT10 6 3RT14 6	96...127V AC/DC	3RT1965-5PF31	30830.-	1
		200...277V AC/DC	3RT1965-5PP31	30830.-	1
S12	3RT10 7 3RT14 7	96...127V AC/DC	3RT1975-5PF31	41120.-	1
		200...277V AC/DC	3RT1975-5PP31	41120.-	1

Arc Chambers for 3RT10 / 3RT14

Size	Contactor type	Version	Type	Unit LP ₹	Std. pkg. (nos.)
S6	3RT10 54	Arc chutes 3-pole	3RT1954-7A	3810.-	1
	3RT10 55		3RT1955-7A	4315.-	1
	3RT10 56		3RT1956-7A	4755.-	1
S10	3RT10 64		3RT1964-7A	4870.-	1
	3RT10 65		3RT1965-7A	5255.-	1
	3RT10 66		3RT1966-7A	5425.-	1
S12	3RT10 75		3RT1975-7A	6105.-	1
	3RT10 76		3RT1976-7A	6290.-	1
S6	3RT14 56 ¹⁾		3RT1956-7B	6315.-	1
S10	3RT14 66 ¹⁾		3RT1966-7B	7370.-	1
S12	3RT14 76 ¹⁾		3RT1976-7B	8720.-	1

1) For 3RT14 AC-1 duty power contactors

Adaptor plates

Description (Adaptor plates for using in place of 3TF/3TR contactors)	Type	Unit LP ₹	MOQ
3RT10/3RT20 15/16/17 replacing 3TF/3TR 30/31	3TX80120A	150.-	5
3RT10/3RT20 25/26 replacing 3TF/3TR 32/33	3TX80250A	230.-	5
3RT10 34/35 replacing 3TF/3TR 34/35	3TX80400A	315.-	5
3RT10 36 replacing 3TF/3TR 46	3TX80500A	375.-	5
3RT10 44/45 replacing 3TF/3TR 47 / 3TF 477	3TX80800A	755.-	1
3RT10 45/46 replacing 3TF/3TR 48/49	3TX80950A	770.-	1
3RT10 56 replacing 3TF/3TR 52	3TX81850A	1350.-	1
3RT10 64 replacing 3TF/3TR 53	3TX82250A	1440.-	1

To replace existing contactor of any other brand please contact nearest sales office.

Description (Adaptor plates for using in place of old relay terminal block required for independent mounting)	Type	Unit LP ₹	MOQ
3RU29/3RU19 (1.8-25A) replacing 3UA/3UR 52 (1-25A)	3UX8025	380.-	1
3RU19 (5.5-50A) replacing 3UA/3UR 55 (10-45A)	3UX8050	470.-	1
3RU19 (18-100A) replacing 3UA/3UR 58 (16-95A) & replacing 3UA/3UR 5830 (70-120A)	3UX8100	525.-	1

Contacts with fixing parts

For 3RT20 & 3RT10, 3 pole power contactors

1 set = 3 moving and 6 fixed switching contacts with fixing parts

Size	Contactor type	Type	Unit LP ₹	Std. pkg. (nos.)
S2	3RT20 36	3RT2936-6A	4595.-	1
	3RT20 37	3RT2937-6A	6115.-	1
	3RT20 38	3RT2938-6A	8160.-	1
S3	3RT20 46	3RT2946-6A	8280.-	1
	3RT20 47	3RT2947-6A	11200.-	1
S6	3RT10 54	3RT1954-6A	12570.-	1
	3RT10 55	3RT1955-6A	15775.-	1
	3RT10 56	3RT1956-6A	20090.-	1
S10	3RT10 64	3RT1964-6A	22765.-	1
	3RT10 65	3RT1965-6A	25435.-	1
	3RT10 66	3RT1966-6A	30005.-	1
S12	3RT10 75	3RT1975-6A	39620.-	1
	3RT10 76	3RT1976-6A	50875.-	1

For 3RT24/14 AC-1 duty power contactors

1 set = 3 movable and 6 fixed switching elements with fixing parts

Size	Contactor type	Type	Unit LP ₹	Std. pkg. (nos.)
S3	3RT24 46	3RT2946-6D	18995.-	1
S6	3RT14 56	3RT1956-6D	30530.-	1
S10	3RT14 66	3RT1966-6D	47540.-	1
S12	3RT14 76	3RT1976-6D	61040.-	1

For 3RT23, 4 pole AC-1 duty contactors

1 set = 4 movable and 8 fixed switching elements with fixing parts

Size	Contactor type	Type	Unit LP ₹	Std. pkg. (nos.)
S2	3RT23 36	3RT2936-6E	5635.-	1
	3RT23 37	3RT2937-6E	6490.-	1

Spares for 3RT12 Vacuum Contactors

For contactor	Type	Unit LP ₹	Std. pkg. (nos.)
Spare coils			
3RT126	4) 23 ... 26 380 ... 420 110 ... 127 220 ... 240	3RT1966-5A..1	12465.- 1
3RT127	23 ... 26 380 ... 420 110 ... 127 220 ... 240	3RT1975-5AB31 3RT1975-5AV31 3RT1975-5AF318K 3RT1975-5AP318K	15125.- 1
Solid state operating mechanism			
3RT126	96... 127V AC/DC 200...277V AC/DC	3RT1966-5NF31 3RT1966-5NP31	16080.- 1 1
3RT127	200...277V AC/DC	3RT1975-5NP31	21410.- 1
Spare vacuum bottles (set of 3)			
3RT1264 3RT1265 3RT1266	3RT1964-6V 3RT1965-6V 3RT1966-6V	80685.- 93170.- 113665.-	1 1 1
3RT1275 3RT1276	3RT1975-6V 3RT1976-6V	137360.- 165330.-	1 1

4) Coil voltage (AC/DC) - Please enter coil codes from table below

Code	B3	F3	P3	V3
Coil voltage (V)	23-26	110-127	220-240	380-420



Contactor Relays - SICONT^{Plus} 3TH3

Contactor size	Rated current (A) Ie AC15 at 230V	AC 50 Hz coil (LPs for 110, 230, 415V)				DC coil (LPs for 24, 110, 220V)			
		Aux. contacts	Type Pl. fill in coil voltage code	Unit LP ₹	Std. pkg. (nos.)	Aux. contacts	Type Pl. fill in coil voltage code	Unit LP ₹	Std. pkg. (nos.)
0	10	4NO [§]	■ 3TH3040-0A..	1745.-	1	4NO [§]	■ 3TH3040-0B..	2475.-	1
		3NO + 1NC [§]	■ 3TH3031-0A..		1	3NO + 1NC [§]	■ 3TH3031-0B..		1
		2NO + 2NC [§]	■ 3TH3022-0A..		1	2NO + 2NC [§]	■ 3TH3022-0B..		1

Power Contactors - SICOP 3TF

Size	Rated current (A) Ie AC3 upto 415V	Motor kW at 415V 50Hz, 3ph	AC 50 Hz coil (LPs for 110, 230, 415V)				DC coil (LPs for 24, 110, 220V)			
			Auxiliary contacts	Type Pl. fill in coil voltage code	Unit LP ₹	Std. pkg. (nos.)	Auxiliary contacts	Type Pl. fill in coil voltage code	Unit LP ₹	Std. pkg. (nos.)
0	9	4	1NO [§]	■ 3TF3010-0A..	1500.-	1	1NO [§]	■ 3TF3010-0B..	2745.-	1
			1NC [§]	■ 3TF3001-0A..			1NC [§]	■ 3TF3001-0B..		
	12	5.5	1NO [§]	■ 3TF3110-0A..	1715.-	1	1NO [§]	■ 3TF3110-0B..	2915.-	1
			1NC [§]	■ 3TF3101-0A..			1NC [§]	■ 3TF3101-0B..		
1	16	7.5	— [§]	■ 3TF3200-0A..	1775.-	1	— [§]	■ 3TF3200-0B..	3375.-	1
	22	11	— [§]	■ 3TF3300-0A..	2445.-	1	— [§]	■ 3TF3300-0B..	4540.-	1
2	32	15	— [§]	■ 3TF3400-0A..	5460.-	1	— [§]	■ 3TF3400-0B..	10515.-	1
	38	18.5	— [§]	■ 3TF3500-0A..	7925.-	1	— [§]	■ 3TF3500-0B..	12525.-	1
	40	18.5	— [§]	■ 3TF3500-0A..ZT00^	8045.-	1	— [§]	■ 3TF3500-0B..ZT00^	12635.-	1

Auxiliary contact blocks

Size	Rated current (A) Ie AC3 upto 415V	Motor kW at 415V 50Hz, 3ph	AC 50 Hz coil (LPs for 110, 230, 415V)				For contactor	Description	Type	Unit LP ₹	Std. pkg. (nos.)
			Auxiliary contacts	Type Pl. fill in coil voltage code	Unit LP ₹	Std. pkg. (nos.)					
3	45	22	2NO + 2NC [§]	■ 3TF4602-0A..ZA01®	10940.-	1	3TF30 to 35 & 3TH30	1NO	■ 3TX4010-2A	230.-	10
	63	30	2NO + 2NC [§]	■ 3TF4702-0A..ZA01®	15820.-	1		1NC	■ 3TX4001-2A	230.-	10
	65	30	2NO + 2NC [§]	■ 3TF4702-0A..ZT00^	15920.-	1		1NO (Extd)	■ 3TX4010-4A	360.-	10
	70	37	2NO + 2NC [§]	■ 3TF4772-0A..	16945.-	1		1NC (Extd)	■ 3TX4001-4A	360.-	10
4	75	42	2NO + 2NC [§]	■ 3TF4822-0A..ZA01®	19910.-	1	3TF46 to 3TF57	Second 1NO+1NC Left	■ 3TY7561-1KA008K	1060.-	1
	85	45	2NO + 2NC [§]	■ 3TF4922-0A..ZA01®	24700.-	1		Second 1NO+1NC Right			
6	110	55	2NO + 2NC [§]	■ 3TF5002-0A..	29555.-	1	10				
	140	75	2NO + 2NC [§]	■ 3TF5102-0A..	38985.-	1					
8	170	90	2NO + 2NC [§]	■ 3TF5202-0A..	48935.-	1					
	205	110	2NO + 2NC [§]	■ 3TF5302-0A..	52600.-	1					
10	250	132	2NO + 2NC [§]	■ 3TF5402-0A..	64310.-	1	12				
	300	160	2NO + 2NC [§]	■ 3TF5502-0A..	79985.-	1					
12	400	200	2NO + 2NC [§]	■ 3TF5602-0A..	93800.-	1					

@ For box type (SIGUT) terminals, order 2 nos 3TX7460-0E, LP ₹ 540.- each.

\$ For more aux. contacts, pl. see table above.

^ B0, F0, P0 and B4 coil voltage only available

Note: DC Coil - 3TF4/5 has been discontinued. 3RT Contactors (Page No. 6-7) recommended

Size	Rated current (A) Ie AC3 upto 415V	Motor kW at 415V 50Hz, 3ph	AC 50 Hz coil (LPs for 110, 230, 415V)				DC coil (LPs for 24, 110, 220V)			
			Auxiliary contacts	Type Pl. fill in coil voltage code	Unit LP ₹	Std. pkg. (nos.)	Auxiliary contacts	Type Pl. fill in coil voltage code	Unit LP ₹	Std. pkg. (nos.)
14	630	355	4NO + 4NC	3TF6844-0C..	refer	1	3NO + 3NC	3TF6833-1D.. ¹⁾	refer	1
	820	450	4NO + 4NC	3TF6944-0C..	page no. 10	1	3NO + 3NC	3TF6933-1D.. ¹⁾	page no. 10	1

1) LP includes control contactor

AC 50Hz coil code: 3TF30 to 3TF56, 3TH3

Coil voltage (V)	24	■ 110	■ 230	■ 415
Code	B0	F0	P0	R0

Wide band AC 50 Hz coil code: 3TF30 to 3TF35

Coil voltage (V)	70-140	150-280	260-460
Code	W110	W220	W415

AC 50/60 Hz coil code: 3TF68/69

Coil voltage (V)	110-132	■ 220-240	380-460
Code	F7	M7	Q7

DC coil code: 3TF30 to 3TF35, 3TF68/69, 3TH3

Coil voltage (V)	■ 24	110	220
Code	B4	F4	M4

■ Stock items

Please order in multiples of standard packing.

LP - List Price

Extra LP per unit for non-std coils B0 / M0# / U0# (AC), DC and wide band

for 3TH, 3TF30 to 33	295.-	for 3TF34 to 49	345.-	for 3TF50 to 56	905.-
Wide band coil for 3TH, 3TF30 to 33	295.-	Wide band coil for 3TF34/35	345.-		

For any non-standard coil or contactor with non standard coil, minimum order quantity should be 100 nos. or minimum order value of ₹1,00,000/- per item.

For non-standard coil voltages not mentioned above, pl. check with Siemens.

M0: 220V AC, U0: 240V AC

2 Pole DC Contactors - 3TC



For DC loads
with AC coil, 2NO+2NC aux. contacts

Contactor size	Rated current Ie (A) DC3/5	Type ²⁾	Unit LP ₹	Std. pkg. (nos.)
2	32	3TC4417-0B..	24910.-	1
4	75	3TC4817-0B..	124015.-	1
8	220	3TC5217-0B..	208770.-	1
12	400	3TC5617-0B..	356520.-	1

²⁾ AC coil voltage - Please enter coil codes from table below

Code	F0	U0
Coil voltage (V) (50Hz)	110	240

with DC coil, 2NO + 2NC aux. contacts

Contactor size	Rated current Ie (A) DC3/5	Type ³⁾	Unit LP ₹	Std. pkg. (nos.)
2	32	3TC4417-0A..	34380.-	1
4	75	3TC4817-0A..	149370.-	1
8	220	3TC5217-0A..	256645.-	1
12	400	3TC5617-0A..	473755.-	1

³⁾ DC coil voltage - Please enter coil codes from table below

Code	B4	F4	M4
Coil voltage (V)	24	110	220

Accessories for SICOP / SICONT^{Plus}

Interlocking kit for two 3TF contactors
(inclusive of base plate and interlocking mechanism)

Contactor type	Type	Unit LP ₹	Std. pkg. (kits)
3TF30-35	■ 3TX4091-1A#	735.-	10
3TF46/47/47-7	■ 3TX7466-1YA0	2590.-	2
3TF48/49	■ 3TX7486-1YA0	4220.-	2
3TF50/51	■ 3TX7506-1YA0	4745.-	2
3TF52/53	■ 3TX7526-1YA0	5430.-	2
3TF54/55	■ 3TX7546-1YA0	6535.-	2
3TF56/57	■ 3TX7566-1YA0	6980.-	2
3TF50/52	3TX7526-1YA09	5430.-	2
3TF52/54	■ 3TX7546-1YA09	6535.-	2

Note: Higher rating upon enquiry # W/o base plate (not required)

Coil voltage		Type	Unit LP ₹	Std. pkg. (nos.)
AC	DC			
Surge suppressor (varistor) for 3TF30-35, 3TH30				
24 - 48 V	24 - 70 V	■ 3TX7402-3GY1	660.-	10
48 - 127V	70 - 150V	■ 3TX7402-3HY1	660.-	10
127 - 240V	150 - 250V	■ 3TX7402-3JY1	660.-	10
240 - 400V	—	3TX7402-3KY1	850.-	10
400 - 600V	—	3TX7402-3LY1	850.-	10
Surge suppressor (RC unit) for 3TF30-35, 3TH30				
24 - 48 V	24 - 70 V	3TX7402-3RY2	1055.-	10
48 - 127V	70 - 150V	3TX7402-3SY2	1055.-	10
127 - 240V	150 - 250V	3TX7402-3TY2	1055.-	10
240 - 400V	—	3TX7402-3UY2	1055.-	10
400 - 600V	—	3TX7402-3VY2	1055.-	10
Surge suppressor (varistor) for 3TF46-56				
Less than 48V	24 - 70V	■ 3TX7462-3GY1	910.-	10
48 - 127V	70 - 150V	■ 3TX7462-3HY1	910.-	10
127 - 240V	150 - 250V	■ 3TX7462-3JY1	910.-	10
240 - 400V	—	3TX7462-3KY1	960.-	10
400 - 600V	—	3TX7462-3LY1	960.-	10



Spares for SICOP and SICON^{Plus} Contactors

SICOP main contact kits (set of 6 fixed & 3 moving contacts)

For Contactor (AC3 Rating)	Type	LP per set ₹	Std. pkg. (nos.)
3TF32/42 (16A)	■ 3TY7420-0A	1005.-	1
3TF33/43 (22A)	■ 3TY7430-0A	1405.-	1
3TF34 (32A)	■ 3TY7340-0C	2700.-	1
3TF35 (38A)	■ 3TY7350-0C	4115.-	1
3TF44 (32A)	■ 3TY7440-0A	2985.-	1
3TF45 (38A)	■ 3TY7450-0A	4115.-	1
3TF46 (45A)	■ 3TY7460-0YA	4415.-	1
3TF47 (63A)	■ 3TY7470-0YA	6435.-	1
3TF477 (70A)	■ 3TY7477-0YA	7460.-	1
3TF48 (75A)	■ 3TY7480-0A	8580.-	1
3TF49 (85A)	■ 3TY7490-0A	11495.-	1
3TF50 (110A)	■ 3TY7500-0YA	12540.-	1
3TF51 (140A)	■ 3TY7510-0YA	15775.-	1
3TF52 (170A)	■ 3TY7520-0YA	19825.-	1
3TF53 (205A)	■ 3TY7530-0YA	21150.-	1
3TF54 (250A)	■ 3TY7540-0YA	25440.-	1
3TF55 (300A)	■ 3TY7550-0YA	29910.-	1
3TF56 (400A)	■ 3TY7560-0YA	39575.-	1
3TF68 (630A)	3TY7680-0B ^{\$}	268020.-	1
3TF69 (820A)	3TY7690-0B ^{\$}	430630.-	1

\$ Set of 3x vacuum bottles.

Auxiliary contact blocks

For contactor	Description	Type	Unit LP ₹	Std.pkg. (nos.)
3TF46-57	1NO + 1NC (Extd) Right	3TY7561-1E	1365.-	1
3TF46 to 3TF57, 3TK5	Built-in, 1NO+1NC Left / Right	3TY7561-1AA00-8K	1060.-	1
	Add-on, Second 1NO+1NC Left / Right	3TY7561-1KA00-8K	1060.-	1

DC coils

For contactor	Type†	Unit LP ₹	Std.pkg. (nos.)
		For 24/110/ 220V	
3TH3, 3TF30-33/42/43	■ 3TY4803-0B..	1230.-	1
3TF34/35	3TY7443-0B..	1845.-	1
3TF68	3TY7683-0D..	LP on request	1

† Pl. add coil voltage code from table on page no. 35.

24V, 110V, 220V are stock items only for 3TH3/3TF30/31/32/33

SICOP arc chambers

For Contactor	Type	Unit LP ₹	Std. pkg. (nos.)
3TF34	3TY7342-0C	730.-	1
3TF35	3TY7352-0C	770.-	1
3TF46	3TY7462-0YA	1510.-	1
3TF47	3TY7472-0YA	1845.-	1
3TF477	3TY7477-0YD	2220.-	1
3TF48	3TY7482-0A	2680.-	1
3TF49	3TY7492-0A	3095.-	1
3TF50	3TY7502-0YA	3670.-	1
3TF51	3TY7512-0YA	4180.-	1
3TF52	3TY7522-0YA	4585.-	1
3TF53	3TY7532-0YA	4730.-	1
3TF54	3TY7542-0YA	5100.-	1
3TF55	3TY7552-0YA	5250.-	1
3TF56	3TY7562-0YA	5920.-	1

AC coils (50 Hz)

For contactor	Type†	Unit LP ₹		Std. pkg. (nos.)
		For 110/230/ 415V 50Hz	For all other coil voltages	
3TH3, 3TF30-33/42/43	■ 3TY7403-0A..	905.-	1030.-	1
3TF34/35/44/45	■ 3TY7443-0A..	1115.-	1445.-	1
3TF46/47/477	■ 3TY7463-0A..	1935.-	2250.-	1
3TF48/49	■ 3TY7483-0A..	3535.-	3865.-	1
3TF50/51	■ 3TY7503-0A..	3595.-	4470.-	1
3TF52/53	■ 3TY7523-0A..	4555.-	5425.-	1
3TF54/55	■ 3TY7543-0A..	5510.-	6385.-	1
3TF56	■ 3TY7563-0A..	8000.-	9750.-	1
3TF68	3TY7683-0C..	60530.-	NA	1
3TF69	3TY7693-0C..	115000.-	NA	1

† Pl. add coil voltage code from table on page no. 35.

110V, 230V, 415V are stock items for 3TH, 3TF30-56

24V is stock item only for 3TH3/3TF30/31/32/33

Connector

The 3TS90 **connector** is used to mount the motor protection circuit breaker 3VS/3VU on the contactor 3TF with screw terminals. It enables mechanical and electrical connection between contactor and motor starter protection circuit breaker.



Range:

MPCB		Contactor		Type of Connector	Unit LP ₹	Std. pkg. (nos.)
Type	Current Rating	Type	AC3 Current Rating			
3VS13/3VU13	0.16 to 20A	3TF30/31	9 / 12 A	3TS9001-8K	390.-	1
3VS13/3VU13	6 to 25A	3TF32/33	16 / 22A	3TS9002-8K	460.-	1

Benefits:

- 1) Direct mounting of 3VS/3VU MPCB on 3TF
- 2) Secure poor connections
- 3) Reduced feeder size and assemble time

Spares for 3TC Contactors

Description	Version	Type	Unit LP ₹	Std. pkg. (nos.)
Set of main contacts	3TC44	3TY2440-0A	8785.-	1
	3TC48	3TY2480-0A	21505.-	1
	3TC52	3TY2520-0A	60985.-	1
	3TC56	3TY2560-0A	120945.-	1
AC coils ¹⁾ (50 Hz)	3TC44	3TY7403-0A..	905.-	1
	3TC52	3TY6523-0A..	15470.-	1
DC coils ²⁾	3TC44	3TY6443-0B..	15850.-	1
	3TC48	3TY6483-0B..	27035.-	1
	3TC52	3TY6523-0B..	66835.-	1
	3TC56	3TY6563-0B..	92820.-	1
Arc chambers	3TC44	3TY2442-0A	8605.-	1
	3TC48	3TY2482-0A	15615.-	1
	3TC52	3TY2522-0A	24305.-	1
	3TC56	3TY2562-0A	49130.-	1
Auxiliary contacts 1st 1NO + 1NC Left/Right 2nd 1NO + 1NC Left 2nd 1NO + 1NC Right	3TC44/48	3TY6501-1AA00	3915.-	1
	3TC48	3TY6501-1K		1
	3TC48	3TY6501-1L		1

1) AC coil voltage - Please enter coil codes from table below


Code	B0	F0	U0	R0
Coil voltage (50 Hz)	24	110	240	415\$

\$ Only for 3TC 44

2) DC coil voltage - Please enter coil codes from table below

Code	B4	F4	M4
Coil voltage	24	110	220



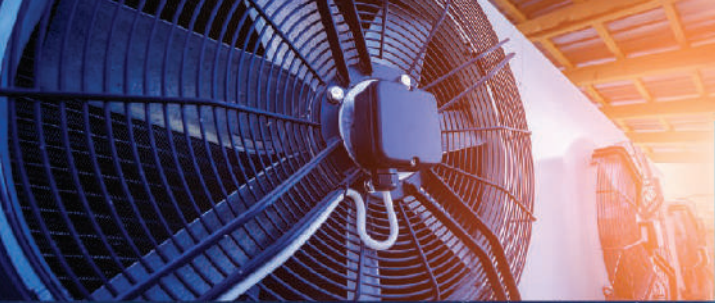

Designed


with



Application



in

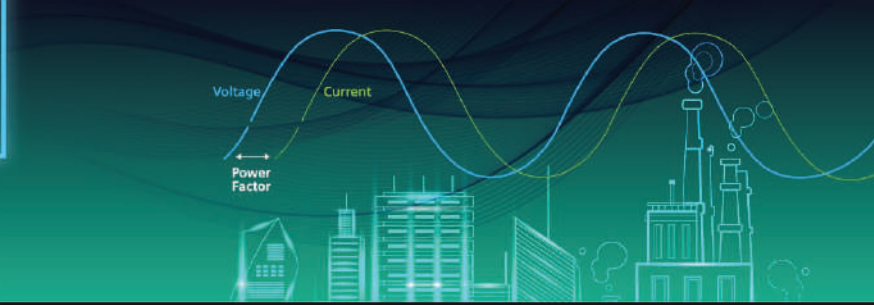

Mind



Explore 3TS range of Contactors

Capacitor duty Contactors
2 Pole Contactors
Converter duty Contactors
LED Switching Contactors
4 Pole Contactors

www.siemens.co.in

SIEMENS

3TS Capacitor duty Contactors

The 3TS capacitor duty contactor (with **patented** de-latching technology) provides a reliable and economical solution for capacitor switching applications.

Features and Benefits

- **De-latching operating principle**
- SIGUT Termination technique
- Finger touch proof terminals
- Compact Dimensions
- DIN / Screw mounting
- Reliable switching of capacitor banks
- Ease of wiring (can obviate use of lugs)
- Operator Safety
- Space saving
- Flexible mounting

Now in
TI - GREY **NEW**



Capacitor kVAR 415V, 3ph, 50Hz	Built-in aux. contacts	Type®	Unit LP ₹	Built-in aux. contacts	Type®	Unit LP ₹	Std. pkg. (nos.)
5 kvar NEW	1 NO	3TS2110-0A..5-8K†	2420.-				
7 kvar	1 NO	3TS1110-0A..5-8K†	2660.-				
10 kvar NEW	–	3TS2200-0A..5-8K†	2890.-	1NO+1NC	3TS2211-0A..5-8K	3315.-	
12.5 kvar	–	3TS1200-0A..5-8K†	2960.-	1NO+1NC	3TS1211-0A..5-8K	3385.-	1
16 kvar	–	3TS1300-0A..5-8K†	4070.-	1NO+1NC	3TS1311-0A..5-8K	4490.-	1
20 kvar	–	3TS1400-0A..5-8K†	4585.-	1NO+1NC	3TS1411-0A..5-8K	4995.-	1
25 kvar	–	3TS1500-0A..5-8K†	5295.-	1NO+1NC	3TS1511-0A..5-8K	5725.-	1
30 kvar NEW	–	3TS2500-0A..5-8K†	8250.-	1NO+1NC	3TS2511-0A..5-8K	8675.-	1
40 kvar NEW	2 NO + 2 NC	3TS2722-0A..5-8K	14000.-				
50 kvar	2 NO + 2 NC	3TS1722-0A..5-8K	16390.-				

† Facility to add one contact block of 1NO / 1NC

@ AC 50Hz coil code - Please enter coil codes from table below

	For 3TS contactors		
Code	F0	P0	R0
Coil voltage (V)	110	230	415

Auxiliary contact blocks

For contactor	Description	Type	Unit LP ₹	Std. pkg. (nos.)
3TS1110-3TS1500	1NO	■ 3TX4010-2A	230.-	10
	1NC	■ 3TX4001-2A	230.-	10

3MT7 Capacitor Duty Contactors **NEW**

Capacitor kvar 440V AC, 3Ph, 50Hz	Built-in aux. contacts	Type	Unit LP ₹	Std. pkg. (nos.)
60kVAR	1NO+2NC	3MT70060JA126A..	17420.-	1
80kVAR	1NO+2NC	3MT70080JA126A..	21385.-	1
100kVAR	1NO+2NC	3MT70100JA126A..	22225.-	1

Please add coil code from adjacent table

Note: For SIRIUS 3RT26 Capacitor Duty Contactors - Please contact Siemens

Coil 50/60Hz for 60 kvar contactor					
Coil Code	C2	G2	N2	P2	R2
Voltage	24V AC	110V AC	■ 220V AC	■ 240V AC	415V AC

Coil 50Hz for 80 & 100 kvar contactors				
Coil Code	F0	M0	U0	V0
Voltage	110V AC	■ 220V AC	■ 240V AC	415V AC



3TS Converter duty Contactors

Features

- Offers one of the highest AC-1 rating in given size
- Arc chamber interlock
- SIGUT Termination technique
- Compact Dimensions
- Screw mounting
- Double break parallel bridge auxiliary contacts

Applications

- VFD, Soft Starters applications
- UPS
- Solar and Wind inverters
- Resistive loads
- Battery charging
- Neutral switching



Contactor Size	Rated current Ie (A) AC1 at 415V	AC Coil		
		Type	Unit LP ₹	Std. pkg. (nos.)
3	100	3TS4822-0A..1-8K	10630.-	1
4	145	3TS5022-0A..1-8K	18520.-	1
6	200	3TS5122-0A..1-8K	24945.-	1
6	225	3TS5222-0A..1-8K	28930.-	1
8	275	3TS5322-0A..1-8K	41105.-	1
8	325	3TS5422-0A..1-8K	46465.-	1
10	400	3TS5522-0A..1-8K	52090.-	1
12	525	3TS5622-0A..1-8K	71310.-	1

for 3TS48-3TF56

	AC Coil (50Hz)	
Code	F0	P0
Coil voltage (V)	110	230

3TS 2 Pole Contactors



Benefits:

- Ease of wiring (can avoid use of lugs)
- Operator Safety (contactor cannot be switched-on if arc chamber is not fitted properly)
- Flexible mounting
- Space saving
- Unmatched contact reliability
(ensures reliable contact at low voltage & low currents)

Standards:

3TS contactors conform to IS 13947 and IEC 60947. They also carry CE mark.

Application:

- Single Phase Pumps
- HVAC
- ESP
- Lighting

Spares for 3TS Contactors

Capacitor Duty

Spare coils

Contactor kVAR	Description	Type*	Unit LP ₹	Std. pkg. (nos.)
5 kvar	AC 50Hz coil	3TY74030A..	905.-	1
7 kvar				
10 kvar				
12.5 kvar				
16 kvar		3TY74430A..	1115.-	1
20 kvar				
25 kvar				
30 kvar				
40 kvar		3TY74630A..	1935.-	1
50 kvar				

* For coil, refer below table

	For 3TS contactors		
Code	F0	P0	R0
Coil voltage (V)	110	230	415

Pre-charge resistor + Contact block kit

Contactor kVAR	Description	Type	Unit LP ₹	Std. pkg. (nos.)
10 kvar	Pre-charge resistor + early making contact block kit + main contacts kit	3TS9762-0SX15-8K	2250.-	1
12.5 kvar		3TS9762-0SX15-8K	2250.-	1
16 kvar		3TS9763-0SX15-8K	3350.-	1
20 kvar		3TS9764-0SX15-8K	3780.-	1
25 kvar		3TS9765-0SX15-8K	4445.-	1
30 kvar		3TS9765-0SX15-8K	4445.-	1
40 kvar		3TS9767-0SX15-8K	11425.-	1
50 kvar		3TS9767-0SX15-8K	11425.-	1

Note: Pre-charge resistor + early making contact block kit + main contacts should be replaced simultaneously

Rated current (A) Ie AC3 upto 415V	Auxiliary contacts	Type	Unit LP ₹	Std. pkg. (nos.)
9	1NO	3TS3010-0A..2-8K	940.-	1
12	1NO	3TS3110-0A..2-8K	1045.-	1
18	1NO	3TS3210-0A..2-8K	1210.-	1
25	-	3TS3300-0A..2-8K	1505.-	1
32	-	3TS3400-0A..2-8K	3305.-	1
40	-	3TS3500-0A..2-8K	4720.-	1
50	-	3TS3600-0A..2-8K	6000.-	1
65	2NO+2NC	3TS4722-0A..2-8K	9020.-	1
75	2NO+2NC	3TS4822-0A..2-8K	10630.-	1
85	2NO+2NC	3TS4922-0A..2-8K	12375.-	1
105	2NO+2NC	3TS5022-0A..2-8K	16295.-	1
140	2NO+2NC	3TS5122-0A..2-8K	19810.-	1
160	2NO+2NC	3TS5222-0A..2-8K	26945.-	1
205	2NO+2NC	3TS5322-0A..2-8K	29680.-	1
250	2NO+2NC	3TS5422-0A..2-8K	34080.-	1
300	2NO+2NC	3TS5522-0A..2-8K	42615.-	1
400	2NO+2NC	3TS5622-0A..2-8K	55115.-	1

Coil voltage (V AC 50Hz)	110 V AC	230 V AC	415V AC
Code	F0	P0	R0

Convertor Duty

Main contact kits (set of 6 fixed & 3 moving contacts)

Contactor rating	Description	Type*	Unit LP ₹	Std. pkg. (nos.)
3TS48	Spare main contact kits	3TS9148-01-8K	5145.-	1
3TS50		3TS9150-01-8K	9175.-	1
3TS51		3TS9151-01-8K	12475.-	1
3TS52		3TS9152-01-8K	13950.-	1
3TS53		3TS9153-01-8K	19810.-	1
3TS54		3TS9154-01-8K	22020.-	1
3TS55		3TS9155-01-8K	24220.-	1
3TS56		3TS9156-01-8K	32300.-	1

Spare coils

	AC Coil	Unit LP ₹
3TS48	3TY7463-0A..	1935.-
3TS50	3TY7483-0A..	3535.-
3TS51/52	3TY7503-0A..	3595.-
3TS53/54	3TY7523-0A..	4555.-
3TS55	3TY7543-0A..	5510.-
3TS56	3TY7563-0A..	8000.-

refer page no. 40 for coil codes

Spares for 3MT7 Contactors

Contactor kvar	Type	Unit LP ₹	Std. pkg. (nos.)
60kvar, 3MT70060JA126A..	3MT76000L__9M1A	1985.-	1
80kvar, 3MT70080JA126A..	3MT78000L__9M1A	2165.-	1
100kvar, 3MT70100JA126A..			

Refer page no 40 for coil codes


Spare side aux. contact block for 80 & 100 kvar contactor	Type	Unit LP ₹	Std. pkg. (nos.)
1NO+1NC	3MT70110CL09M1A	490.-	10
2NO	3MT70200CL09M1A	490.-	10

3TS 4 Pole Contactors

for Power Applications

www.siemens.co.in

NEW

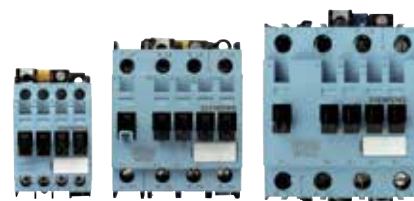

Contactor Size	Rated current I _e (A) AC1 at 415V	AC Coil ¹⁾	Unit LP ₹		DC Coil ¹⁾	Unit LP ₹	
			Standard Coil	Electronic Coil		Standard Coil	Electronic Coil
Size 0	18A	3TS3100-0A..4-8K	1510.-		3TS3100-0B..4-8K	2985.-	
Size 0	25A	3TS3200-0A..4-8K	1595.-		3TS3200-0B..4-8K	3380.-	
Size 1	35A	3TS3300-0A..4-8K	1790.-		3TS3300-0B..4-8K	3855.-	
Size 1	40A	3TS3400-0A..4-8K	2360.-		3TS3400-0B..4-8K	5705.-	
Size 2	45A	3TS3500-0A..4-8K	2765.-	3395.-	3TS3500-0B..4-8K		6565.-
Size 2	50A	3TS3600-0A..4-8K	3070.-	3730.-	3TS3600-0B..4-8K		8330.-
Size 2	65A	3TS3700-0A..4-8K	5970.-	6635.-	3TS3700-0B..4-8K		11605.-
Size 2	65A*	3TS3700-0A..4-8KA0	6740.-	7400.-	3TS3700-0B..4-8KA0		13300.-

1) Please add coil voltage code from table below

* 50A AC-3 rating

Size S0 & S1	Standard Coil				
	AC (50 Hz)			DC	
Code	F7	M7	R7	B4	E4
Coil Voltages	87...127 V	175...240 V	337...427 V	24 V	52...55V DC

Size S2	Standard Coil			Electronic Coil 			
	AC (50 Hz)			AC (50 Hz)		DC	
Code	F0	P0	R0	F7	M7	B4	E4
Coil Voltages	110 V	230 V	415 V	81...136 V	137...273 V	24 V	52...55V DC

Accessories

Auxiliary Contact Block	Type	Unit LP ₹
1 NO	3TX40 10-2A	230.-
1 NC	3TX40 01-2A	230.-

Mechanical Interlock	Type	Unit LP ₹
Size 0 and Size 1	3TX4091-1A	735.-
S2	3TX4091-1A	735.-
	+ 3TX4091-1G**	195.-

Surge Suppressor		Coil Voltage		Varistors		RC Element	
		AC	DC	Type	Unit LP ₹	Type	Unit LP ₹
Size 0, Size 1 and Size 2	Standard Coil	24 - 48 V	24 - 70 V	3TX7402-3GY1	660.-	3TX7402-3RY2	1055.-
		48 - 127V	70 - 150V	3TX7402-3HY1	660.-	3TX7402-3SY2	
		127 - 240V	150 - 250V	3TX7402-3JY1	660.-	3TX7402-3TY2	
		240 - 400V	–	3TX7402-3KY1	850.-	3TX7402-3UY2	
Size 2	Electronic Coil	81-273V AC				3TX7402-3PY2	
			24-55V			3TX7402-3QY2	

**Used only when the contactors are DIN rail mounted. Refer catalog for more details

Main Contact Kits (set of 8 fixed and 4 moving contacts)

Contactor Size	Rated current I _e (A) AC1 at 415V	For Contactor	Type	Unit LP ₹
Size 1	35A	3TS3300	3TS9133-0E	1230.-
Size 1	40A	3TS3400	3TS9134-0E	1735.-
Size 2	45A	3TS3500	3TS9135-0E	2640.-
Size 2	50A	3TS3600	3TS9136-0E	3105.-
Size 2	65A	3TS3700	3TS9137-0E	3110.-
Size 2	65A*	3TS3700	3TS9137-0A	4505.-

* 50A AC-3 rating

Spare Coils

Contactor Size	Type ²⁾	Unit LP ₹	Type ²⁾	Unit LP ₹
	AC		DC	
Size 0	3TS9231-0A..4-8K	935.-	3TS9231-0B..4-8K	1280.-
Size 1	3TS9233-0A..4-8K	1005.-	3TS9233-0B..4-8K	1345.-
Size 2	3TS9235-0A..4-8K (Standard)	1115.-		
Size 2	3TS9235-0A..4-8K (Electronic)	1615.-	3TS9235-0B..4-8K (Electronic)	1920.-

2) Please add voltage code from table in page no 42



3TS Single Pole LED Contactors


NEW

Siemens 3TS LED Contactors been designed keeping in mind the challenges in LED lamp switching applications and thus offers a highly reliable & safe solution to the customer

Available in
4000W - 3TS3210-0AM71-8K
8000W - 3TS3310-0AM71-8K

Price on request



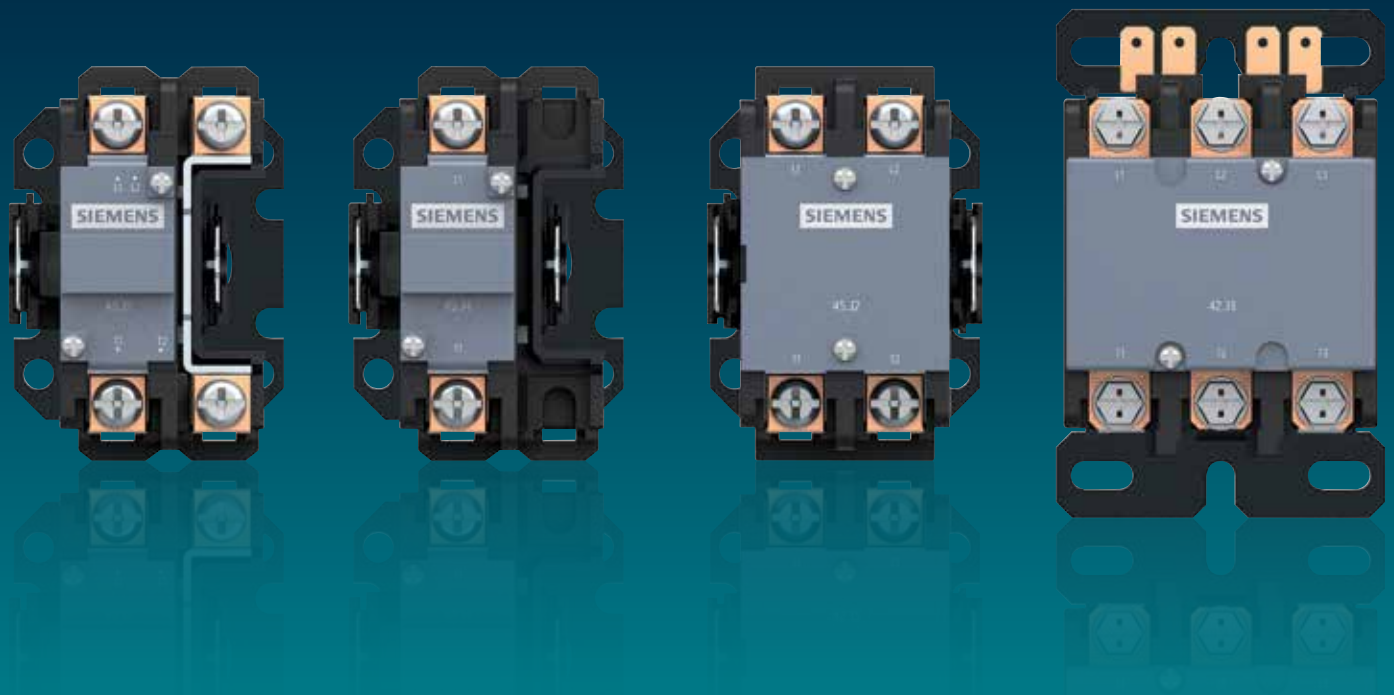

Definite Purpose Contactors **45.J & 42.J**

www.siemens.co.in

SIEMENS

Definite Purpose Contactors – 42.J & 45.J

Ordering data	AC 8a rating	Pan screw	Hex screw quad quick connect	Unit MRP ₹	Std pkg (nos)
1 Pole with shunt	25A ■	45CJ10A_B	45CJ10A_C	1095.-	1
	30A ■	45DJ10A_B	45DJ10A_C	1135.-	1
	40A	45EJ10A_B	45EJ10A_C	1175.-	1
1 Pole without shunt	25A ■	45CJ40A_B	45CJ40A_C	1040.-	1
	30A ■	45DJ40A_B	45DJ40A_C	1070.-	1
	40A	45EJ40A_B	45EJ40A_C	1110.-	1



Ordering data	AC 8a rating	Box with lug dual quick connect	Hex screw dual quick connect	Unit MRP ₹	Std pkg (nos)
2 Pole	20A ■	45BJ20A_D	45BJ20A_E	1315.-	1
	30A ■	45DJ20A_D	45DJ20A_E	1330.-	1
	40A ■	45EJ20A_D	45EJ20A_E	1370.-	1



Ordering data	AC 8a rating	Box with lug dual quick connect	Hex screw dual quick connect	Unit MRP ₹	Std pkg (nos)
3 Pole	20A	42BJ35A_D	42BJ35A_E	1695.-	1
	25A	42CJ35A_D	42CJ35A_E	1720.-	1
	30A	42DJ35A_D	42DJ35A_E	1740.-	1
	40A ■	42EJ35A_D	42EJ35A_E	1770.-	1
3 Pole with inbuilt 1NO+1NC aux contacts	20A	42BJ36A_D	42BJ36A_E	2100.-	1
	25A	42CJ36A_D	42CJ36A_E	2125.-	1
	30A	42DJ36A_D	42DJ36A_E	2140.-	1
	40A ■	42EJ36A_D	42EJ36A_E	2175.-	1



Please add coil code from table below

Spare coil for contactor	Type ref	Unit MRP ₹	Std pkg (nos)
1 Pole contactor	75J19A_	320.-	1
2 Pole contactor	75J29A_	385.-	1
3 Pole contactor	75J39A_	435.-	1

Please add coil code from table below

Coil Code	J	F	G	L	H	E	P
Voltage	24V AC, 50/60 Hz	120V AC, 60 Hz	240V AC, 50/60 Hz	277V AC, 60 Hz	480V AC, 60 Hz	145-180V AC, 50 Hz (available only for 1P & 2P versions)	170-240V AC, 50 Hz available for 1P & 2P & 3P (without inbuilt aux contacts)


■ Standard material

Spring loaded connections are...

Strong



Flexible

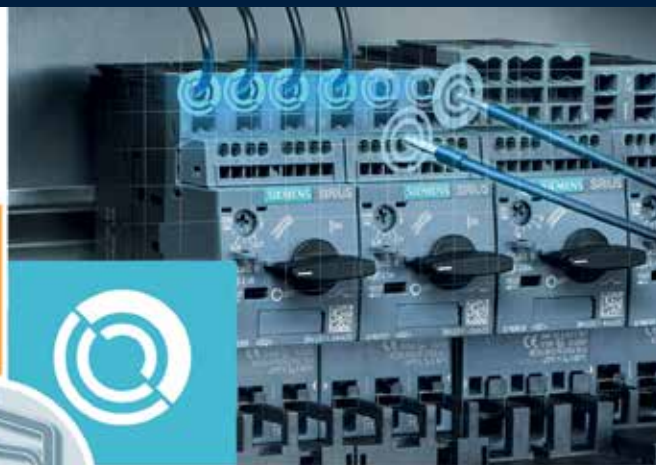

Fast



Safe

Easy connecting & wiring

Switch to Spring Loaded Technology

www.siemens.co.in

SIEMENS

Thermal Overload Relays - 3RU




For contactor mounting - Class 10 - Screw Terminals

Size of relay / contactor	Set current value of the inverse- time delayed overload release A	Type#	Unit LP ₹	Std. pkg. (nos.)	
S00	0.11 ... 0.16	3RU2116-0AB0	2595.-	1	
	0.14 ... 0.2	3RU2116-0BB0			
	0.18 ... 0.25	3RU2116-0CB0			
	0.22 ... 0.32	3RU2116-0DB0			
	0.28 ... 0.4	3RU2116-0EB0			
	0.35 ... 0.5	3RU2116-0FB0			
	0.45 ... 0.63	3RU2116-0GB0	2625.-		
	0.55 ... 0.8	3RU2116-0HB0			
	0.7 ... 1	3RU2116-0JB0			
	0.9 ... 1.25	3RU2116-0KB0			
	1.1 ... 1.6	3RU2116-1AB0			
	1.4 ... 2	3RU2116-1BB0			
	1.8 ... 2.5	3RU2116-1CB0			
	2.2 ... 3.2	3RU2116-1DB0			
	2.8 ... 4	3RU2116-1EB0			
	3.5 ... 5	3RU2116-1FB0			
	4.5 ... 6.3	3RU2116-1GB0			
	5.5 ... 8	3RU2116-1HB0			
	7 ... 10	3RU2116-1JB0			2845.-
	9 ... 12.5	3RU2116-1KB0			2945.-
	11 ... 16	3RU2116-4AB0			
S0	1.8 ... 2.5	3RU2126-1CB0	2720.-	1	
	2.2 ... 3.2	3RU2126-1DB0			
	2.8 ... 4	3RU2126-1EB0			
	3.5 ... 5	3RU2126-1FB0			
	4.5 ... 6.3	3RU2126-1GB0			
	5.5 ... 8	3RU2126-1HB0			
	7 ... 10	3RU2126-1JB0	2895.-		
	9 ... 12.5	3RU2126-1KB0			
	11 ... 16	3RU2126-4AB0	2965.-		
	14 ... 20	3RU2126-4BB0	2995.-		
	17 ... 22	3RU2126-4CB0			
	20 ... 25	3RU2126-4DB0			
	23 ... 28	3RU2126-4NB0			
	27 ... 32	3RU2126-4EB0	5000.-		
	30 ... 36	3RU2126-4PB0	5040.-		
	34 ... 40	3RU2126-4FB0			

Size of relay / contactor	Set current value of the inverse-time delayed overload release A	Type#	Unit LP ₹	Std. pkg. (nos.)
S2	11 ... 16	3RU2136-4AB0	5490.-	1
	14 ... 20	3RU2136-4BB0		
	18 ... 25	3RU2136-4DB0		
	22 ... 32	3RU2136-4EB0		
	28 ... 40	3RU2136-4FB0		
	36 ... 45	3RU2136-4GB0	6920.-	
	40 ... 50	3RU2136-4HB0	7380.-	
	47 ... 57	3RU2136-4QB0	8300.-	
	54 ... 65	3RU2136-4JB0	9215.-	
	62 ... 73	3RU2136-4KB0	9490.-	
S3	70 ... 80	3RU2136-4RB0	10095.-	
	28 ... 40	3RU2146-4FB0	8335.-	1
	36 ... 50	3RU2146-4HB0	8335.-	
	45 ... 63	3RU2146-4JB0	9265.-	
	57 ... 75	3RU2146-4KB0	9595.-	
	70 ... 90	3RU2146-4LB0	10165.-	
	80 ... 100	3RU2146-4MB0	12645.-	

* To order overload relays with spring-type terminals replace 10th digit from 'B' to 'C' (for S00, S0 size only)

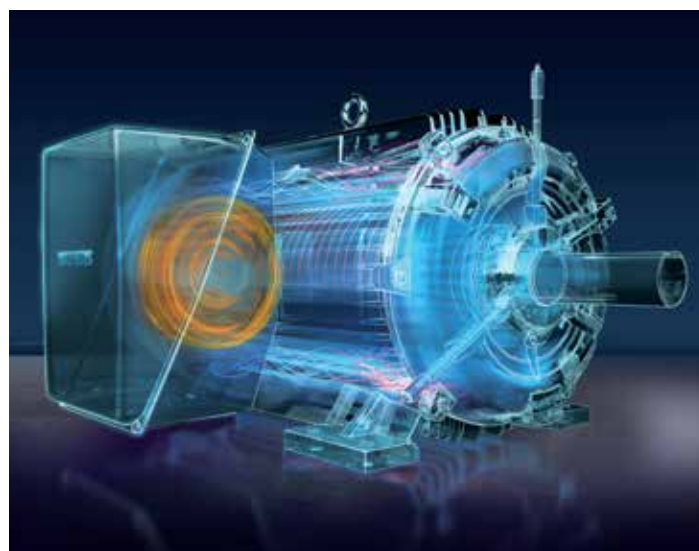

Accessory for independent mounting

For size of relay	Relay type	Type	Unit LP ₹	Std. pkg. (nos.)
S00*	3RU21, 3RB30/31, 3RR21/22/24	3RU2916-3AA01	855.-	1
S0*	3RU21, 3RB30/31, 3RR21/22/24	3RU2926-3AA01	880.-	1
S2	3RU21, 3RB30/31, 3RR21/22/24	3RU2936-3AA01	1445.-	1
S3	3RU21/3RB30/3RB31	3RU2946-3AA01	1700.-	1



* To order terminal supports for overload relays with spring-type terminals replace 10th digit from 'A' to 'C' for S00, S0 only

Thermal Overload Relays - 3RU



Separate Mounting - Class 10

Size of relay / contactor	Rating for induction motor Rated value kW	Set current value of the inverse-time delayed overload release A	Type*	Unit LP ₹	Std. pkg. (nos.)
S6	45	70 - 100	3RU2156-5BB10-8K	11240.-	1
	55	90 - 125	3RU2156-5CB10-8K	11885.-	1
	75	110 - 160	3RU2156-5DB10-8K	11905.-	1
	110	140 - 200	3RU2156-5EB10-8K		1
	45	70 - 100	3RU2156-5BW10-8K ^{\$}		1
	55	90 - 125	3RU2156-5CW10-8K ^{\$}		1
	75	110 - 160	3RU2156-5DW10-8K ^{\$}		1
	110	140 - 200	3RU2156-5EW10-8K ^{\$}		1
S10	110	140 - 200	3RU2166-5EB10-8K	15900.-	1
	132	180 - 250	3RU2166-5FB10-8K		1
	160	220 - 320	3RU2166-5GB10-8K		1
S12	200	280 - 400	3RU2176-5HB10-8K	20240.-	1
	250	350 - 500	3RU2176-5JB10-8K	20620.-	1

Separate Mounting - Class 30

Size of relay / contactor	Rating for induction motor Rated value kW	Set current value of the inverse-time delayed overload release A	Type*	Unit LP ₹	Std. pkg. (nos.)
S6	37	55 - 80	3RU2356-5AB10-8K	20240.-	1
	45	70 - 100	3RU2356-5BB10-8K		1
	55	90 - 125	3RU2356-5CB10-8K		1
	37	55 - 80	3RU2356-5AW10-8K ^{\$}		1
	45	70 - 100	3RU2356-5BW10-8K ^{\$}		1
	55	90 - 125	3RU2356-5CW10-8K ^{\$}		1
S10	75	110 - 160	3RU2366-5DB10-8K	20240.-	1
	110	140 - 200	3RU2366-5EB10-8K		1
S12	132	180 - 250	3RU2376-5FB10-8K		1
	160	220 - 320	3RU2376-5GB10-8K		1

* For heavy duty applications (starting time > 10s), it is recommended to use 3RU class 30 relays to avoid nuisance tripping and reliable protection.

\$ Range available with straight through transformer

Microprocessor based overload relay - 3RB

Size	Current setting range A	3RB (Class 10)		3RB (Class 20)		3RB (Class 5 to 30 – Settable)		Std. pkg (nos.)
		With overload, phase failure and phase unbalance protections		With overload, phase failure and phase unbalance protections		With overload, phase failure and phase unbalance and earth fault protection		
		Type*	Unit LP ₹	Type*	Unit LP ₹	Type*	Unit LP ₹	
S00	0.1 ... 0.4	3RB3016-1RB0	5820.-	3RB3016-2RB0	7270.-	3RB3113-4RB0	12140.-	1
	0.32 ... 1.25	3RB3016-1NB0		3RB3016-2NB0		3RB3113-4NB0		1
	1 ... 4	3RB3016-1PB0		3RB3016-2PB0		3RB3113-4PB0		1
	3 ... 12	3RB3016-1SB0		3RB3016-2SB0		3RB3113-4SB0		1
	4 ... 16	3RB3016-1TB0		3RB3016-2TB0		3RB3113-4TB0		1
S0	0.1 ... 0.4	3RB3026-1RB0	6770.-	3RB3026-2RB0	8445.-	3RB3123-4RB0	12695.-	1
	0.32 ... 1.25	3RB3026-1NB0		3RB3026-2NB0		3RB3123-4NB0		1
	1 ... 4	3RB3026-1PB0		3RB3026-2PB0		3RB3123-4PB0		1
	3 ... 12	3RB3026-1SB0		3RB3026-2SB0		3RB3123-4SB0		1
	6 ... 25	3RB3026-1QB0		3RB3026-2QB0		3RB3123-4QB0		1
	10 ... 40	3RB3026-1VB0	7015.-	3RB3026-2VB0	3RB3123-4VB0	1		
S2	12.5 ... 50	3RB3036-1UB0®	10260.-	3RB3036-2UB0®	12800.-	3RB3133-4UB0®	16570.-	1
	20 ... 80	3RB3036-1WB0®	15465.-	3RB3036-2WB0®	19350.-	3RB3133-4WB0®	21605.-	1
	12.5 ... 50	3RB3036-1UW1#	10260.-	3RB3036-2UW1#	12800.-	3RB3133-4UW1#	16570.-	1
	20 ... 80	3RB3036-1WW1#	15465.-	3RB3036-2WW1#	19350.-	3RB3133-4WW1#	21605.-	1
S3	12.5 ... 50	3RB3046-1UB0®	12165.-	3RB3046-2UB0®	15215.-	3RB3143-4UB0®	21620.-	1
	32 ... 115	3RB3046-1XB0®	15860.-	3RB3046-2XB0®	19915.-	3RB3143-4XB0®	22055.-	1
	12.5 ... 50	3RB3046-1UW1#	13030.-	3RB3046-2UW1#	16080.-	3RB3143-4UW1#	21960.-	1
	32 ... 115	3RB3046-1XW1#	15955.-	3RB3046-2XW1#	19915.-	3RB3143-4XW1#	22055.-	1
S6	50 ... 200	3RB2056-1FC2&	19490.-	3RB2056-2FC2&	24365.-	3RB2153-4FC2&	29165.-	1
S6	50 ... 200	3RB2056-1FW2\$		3RB2056-2FW2\$		3RB2153-4FW2\$		1
S10/12	55 ... 250	3RB2066-1GC2&	21265.-	3RB2066-2GC2&	29605.-	3RB2163-4GC2&	29740.-	1
S10/12	160 ... 630	3RB2066-1MC2&	37845.-	3RB2066-2MC2&	47310.-	3RB2163-4MC2&	49005.-	1

* For size S00 & S0: To order relay with spring type terminals, please replace 10th digit from 'B' to 'E'

Devices with straight-through transformer for stand-alone installation

@ Devices with screw terminals for mounting onto contactor.

& Devices with busbar connection for mounting onto contactor or stand-alone installation.

\$ Devices with straight-through transformer for mounting onto contactor with Box terminals or stand-alone installation.

Microprocessor based overload relay - 3RB22 / 3RB23

0.3 – 3 A
2.4 – 25 A



10 – 100 A



20 – 200 A



63 – 630 A



Current Measuring
Module

+



+



Evaluation Module



Operator panels



Functional Module
(Optional)

- 0.1 mtr.
- 0.5 mtr.

- Overload Protection
- Trip Class 5 to 30 settable
- Thermistor motor protection
- Phase failure protection
- Phase unbalance protection
- Large setting range (1:10)
- Overload warning
- LED indication

- Analog Output (4-20mA)



- Internal earth fault protection
- Ground fault signaling
- Overload warning

Evaluation modules

(Suitable with all current measuring modules)

Description	Type	Unit LP ₹	Std. pkg. (nos.)
3RB22 with monostable output	3RB2283-4AA1	23010.-	1
3RB23 with bistable output	3RB2383-4AA1	33135.-	1
3RB24 with Monostable output (Processing for I/O link)	3RB2483-4AA1	33930.-	1

Current measuring modules

Size	Current range	Type	Unit LP ₹	Std. pkg. (nos.)
S00/S0	0.3 to 3A	3RB2906-2BG1	14085.-	1
	2.4 to 25A	3RB2906-2DG1	14875.-	1
S2/S3	10 to 100A	3RB2906-2JG1	16425.-	1
S6	20 to 200A	3RB2956-2TG2	32105.-	1
S10/12	63 to 630A	3RB2966-2WH2	37060.-	1

Connecting cable

(For connection between evaluation module and current measuring module)

Description	Type	Unit LP ₹	Std. pkg. (nos.)
Length 0.1 m (S00...S3)	3RB2987-2B	1285.-	1
Length 0.5 m (S00...S12)	3RB2987-2D	1875.-	1

Function modules for 3RB22 3RB23 (optional)

Description	Type	Unit LP ₹	Std. pkg. (nos.)
Overload warning + Analog output	3RB2985-2AA0	8875.-	1
Internal earth fault protection + Overload warning + Analog output	3RB2985-2AA1	14215.-	1
Internal earth fault (protection + signaling) + Analog output	3RB2985-2AB1		
Internal earth fault protection + Overload warning	3RB2985-2CA1	2715.-	1
Internal earth fault (protection + signaling)	3RB2985-2CB1		

Operator Panel module for 3RB24 (optional)

Description	Type	Unit LP ₹	Std. pkg. (nos.)
Operator panels (set) One set comprises: • 1 x operator panel • 1 x 3RA6936-0A enabling module • 1 x 3RA6936-0B interface cover • 1 x fixing terminal	3RA6935-0A	113415.-	1
Connecting cables Length 2.5 m (round), for connecting the evaluation module to the operator panel	3UF7933-0BA00-0	5115.-	1

Accessories for 3RU2 Thermal overload relays and 3RB3 solid state overload relays

Accessory Type	Version	Size	3RU2 Thermal overload relay	3RB30/31 solid state overload relay	Type	Unit LP ₹	Std. pkg. (nos.)
Mechanical Reset	Resetting plungers, holders & formers	S00, S0, S6-S12	✓	X	3RU2900-1A	975.-	1
	Resetting plungers, holders & formers		X	✓	3RB3980-0A	490.-	1
	Pushbuttons with extended stroke (12 mm), IP65, Dia 22 mm		✓	✓	3SU1200-0FB10-0AA0	2930.-	1
	Extension plungers		✓	✓	3SU1900-0KG10-0AA0	275.-	1
Cable releases with holder for RESET	Length 400mm	S00, S0, S6-S12	✓	X	3RU2900-1B	2735.-	1
	Length 600mm		✓	X	3RU2900-1C		1
	Length 400mm		X	✓	3RB3980-0B	4725.-	1
	Length 600mm		X	✓	3RB3980-0C		1
Module for remote reset, electrical	24 ... 30 V AC/DC	S00, S0, S6-S12	✓	X	3RU1900-2AB71	3440.-	1
	110 ... 127 V AC/DC		✓	X	3RU1900-2AF71		
	220 ... 250 V AC/DC		✓	X	3RU1900-2AM71		
Sealable covers for covering the setting knob	For 3RB30/3RB31	S00, S0, S6-S12	X	✓	3RB3984-0	2240.-	1
	For 3RU2 / 3RV2		✓	X	3RV2908-0P	130.-	10
Terminal Covers for busbar connections	Length 55 mm	S3			3RT1946-4EA1	955.-	1
	Length 100 mm	S6	✓	✓	3RT1956-4EA1	1830.-	1
	Length 120 mm	S10, S12	✓	✓	3RT1966-4EA1	2415.-	1
Terminal Cover for Box Terminals	Length 20.6 mm	S2	✓	✓	3RT2936-4EA2	235.-	1
	Length 20.8 mm	S3	✓	✓	3RT2946-4EA2	665.-	1
	Length 25 mm	S6	✓	✓	3RT1956-4EA2	1070.-	1
	Length 30 mm	S10/12	✓	✓	3RT1966-4EA2	1885.-	1



Widest range
electronic
overload relays

Thermal overload relays - 3UA / 3UC

Bimetal relay	Current type of mounting	Current setting range A	Type	Unit LP ₹	Std. pkg. (nos.)
3UA50	Contactor® mounting (3TF30/31)	0.1 – 0.16	3UA5000-0A	2355.-	1
		0.16 – 0.25	3UA5000-0C		
		0.25 – 0.4	■ 3UA5000-0E		
		0.4 – 0.63	■ 3UA5000-0G		
		0.63 – 1	■ 3UA5000-0J		
		0.8 – 1.25	■ 3UA5000-0K		
		1 – 1.6	■ 3UA5000-1A		
		1.25 – 2	■ 3UA5000-1B		
		1.6 – 2.5	■ 3UA5000-1C	2370.-	1
		2 – 3.2	■ 3UA5000-1D		
		2.5 – 4	■ 3UA5000-1E		
		3.2 – 5	■ 3UA5000-1F		
		4 – 6.3	■ 3UA5000-1G		
		5 – 8	■ 3UA5000-1H		
		6.3 – 10	■ 3UA5000-1J	2385.-	1
		8 – 12.5	■ 3UA5000-1K		1
		10 – 14.5	■ 3UA5000-2S		1
3UA52	Contactor® mounting (3TF32/33)	1 – 1.6	3UA5200-1A	2450.-	1
		1.25 – 2	3UA5200-1B		1
		1.6 – 2.5	3UA5200-1C		1
		2 – 3.2	3UA5200-1D		1
		2.5 – 4	3UA5200-1E		1
		3.2 – 5	3UA5200-1F		1
		4 – 6.3	■ 3UA5200-1G	2455.-	1
		5 – 8	■ 3UA5200-1H		1
		6.3 – 10	■ 3UA5200-1J		1
		8 – 12.5	■ 3UA5200-1K		1
		10 – 16	■ 3UA5200-2A	2675.-	1
		12.5 – 20	■ 3UA5200-2B		1
		16 – 25	■ 3UA5200-2C		1
					1
3UA55	Contactor® mounting (3TF34/35, 44/45)	10 – 16	■ 3UA5500-2A	4180.-	1
		12.5 – 20	■ 3UA5500-2B		1
		16 – 25	■ 3UA5500-2C		1
		20 – 32	■ 3UA5500-2D		1
		25 – 36	■ 3UA5500-2Q	4350.-	1
		32 – 40	■ 3UA5500-2R		1
		36 – 45	■ 3UA5500-8M		1
					1
Bimetal relay	Current type of mounting	Current setting range A	Type	Unit LP ₹	Std. pkg. (nos.)
3UA58-Z1	Contactor® mounting (3TF46, 3TF47, 3TF48, 3TF49)	16 – 25	3UA5800-2CZ1	7540.-	1
		20 – 32	3UA5800-2DZ1		1
		25 – 40	3UA5800-2EZ1		1
		32 – 50	■ 3UA5800-2FZ1	6435.-	1
		40 – 57	■ 3UA5800-2TZ1		1
		50 – 63	■ 3UA5800-2PZ1	7540.-	1
		57 – 70	■ 3UA5800-2VZ1		1
		63 – 80	■ 3UA5800-2UZ1		1
		70 – 95	■ 3UA5800-8YZ1		1
3UA58-Z2	Contactor® mounting (3TF47 7)	16 – 25	3UA5800-2CZ2	7540.-	1
		20 – 32	3UA5800-2DZ2	7510.-	1
		25 – 40	3UA5800-2EZ2	7510.-	1
		32 – 50	■ 3UA5800-2FZ2	6470.-	1
		40 – 57	■ 3UA5800-2TZ2		1
		50 – 63	■ 3UA5800-2PZ2	7585.-	1
		57 – 70	■ 3UA5800-2VZ2		1
		63 – 80	■ 3UA5800-2UZ2		1
3UA58 30	Contactor® mounting (3TF50)	70 – 95	■ 3UA5830-5B	8305.-	1
		85 – 105	■ 3UA5830-5C	8465.-	1
		95 – 120	■ 3UA5830-5D		1
3UA62	Independent mounting	85 – 135	■ 3UA6230-5A	12070.-	1
		115 – 180	■ 3UA6230-5B		1
		160 – 250	■ 3UA6230-5C	16680.-	1
		200 – 320	■ 3UA6230-5D	17175.-	1
3UA68		250 – 400	■ 3UA6230-5E		1
		320 – 500	3UA6830-5F	22195.-	1
		400 – 630	3UA6830-5G		1

@ Can be converted to independent mounting using accessory.


Relays for heavy starting applications, independent mounting

Current setting range A	Type	Unit LP ₹	Current setting range A	Type	Unit LP ₹	Std. pkg. (nos.)
2.5 – 4	3UC5030-5E	20985.-	40 – 63	3UC5830-5G	20985.-	1
4 – 6.3	3UC5030-5G		63 – 100	3UC6230-5J	21385.-	1
6.3 – 10	3UC5030-5J		100 – 160	3UC6230-5A		1
8 – 12.5	3UC5030-5K		125 – 200	3UC6630-5B		1
10 – 16	3UC5830-5A		160 – 250	3UC6630-5C		1
16 – 25	3UC5830-5C		250 – 400	3UC6630-5E		1
25 – 40	3UC5830-5E					

Note: Relays always supplied in manual execution, can be converted at site to auto execution.

Accessories for 3UA birelays

Description	For relay type	Type	Unit LP ₹	Std. pkg. (nos.)
Accessory for independent mounting	3UA50 3UA52 3UA55 3UA58 3UA58 30	■ 3UX1418 ■ 3UX1420 ■ 3UX1425 ■ 3UX1421 ■ 3UX1421-0XA	545.- 570.- 695.- 730.- 790.-	1 1 1 1 1
Resetting plunger funnel	3UA5/6, 3UC5/6	3UX1011 3UX1013	255.-	10 10
Reset cord + holder: 400 mm length 600 mm length	3UA5/6, 3UC5/6	3UX1015 3UX1016	350.-	5 5
Protection cover	3UA58/3UA58 30 Other 3UA5/6	3UX11101YA 3UX11111YA	260.-	10 10
Set of 3 terminals to convert from 3UA5800-2. or 3UA5800-2.Z2 to 3UA5800-2.Z1 3UA5800-2.Z1 or 3UA5800-2.Z2 to 3UA5800-2. 3UA5800-2. or 3UA5800-2.Z1 to 3UA5800-2.Z2		3UX5811 3UX5812 3UX5813	200.-	10 10 10

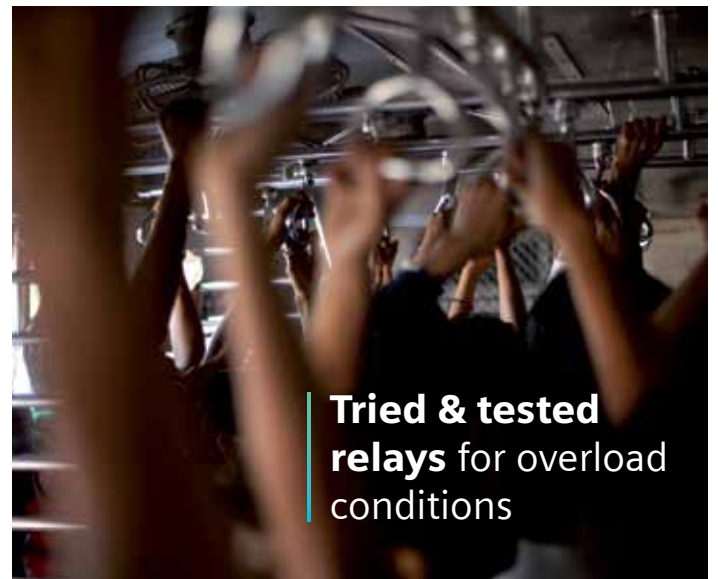

**Tried & tested
relays for overload
conditions**

■ Stock items

MRP - Maximum Retail Price

LP - List Price

Siemens Limited Low Voltage Control Products Price List Eff. 15.11.2022 51

Motor Protection Circuit Breakers - 3RV



Class 10, without auxiliary switch, standard switching capacity, screw terminals

MPCB Specifications			MPCB with Standard release ¹⁾		MPCB with "relay function" ²⁾		MPCB with "Mag only" Release ³⁾		MPCB for transformer protection	
MPCB Size	MPCB rated current A	MPCB overload range A	Type*	Unit LP ₹	Type*	Unit LP ₹	Type*	Unit LP ₹	Type*	Unit LP ₹
S00	0.16	0.11...0.16	3RV2011-0AA10	5580.-	3RV2111-0AA10	7055.-	3RV2311-0AC10	5485.-	3RV2411-0AA10	9490.-
	0.2	0.14...0.2	3RV2011-0BA10		3RV2111-0BA10		3RV2311-0BC10		3RV2411-0BA10	
	0.25	0.18...0.25	3RV2011-0CA10		3RV2111-0CA10		3RV2311-0CC10		3RV2411-0CA10	
	0.32	0.22...0.32	3RV2011-0DA10		3RV2111-0DA10		3RV2311-0DC10		3RV2411-0DA10	
	0.4	0.28...0.4	3RV2011-0EA10		3RV2111-0EA10		3RV2311-0EC10		3RV2411-0EA10	
	0.5	0.35...0.5	3RV2011-0FA10		3RV2111-0FA10		3RV2311-0FC10		3RV2411-0FA10	
	0.63	0.45...0.63	3RV2011-0GA10	6445.-	3RV2111-0GA10	8140.-	3RV2311-0GC10	6305.-	3RV2411-0GA10	10045.-
	0.8	0.55...0.8	3RV2011-0HA10		3RV2111-0HA10		3RV2311-0HC10		3RV2411-0HA10	
	1	0.7...1	3RV2011-0JA10		3RV2111-0JA10		3RV2311-0JC10		3RV2411-0JA10	
	1.25	0.9...1.25	3RV2011-0KA10		3RV2111-0KA10		3RV2311-0KC10		3RV2411-0KA10	
	1.6	1.1...1.6	3RV2011-1AA10		3RV2111-1AA10		3RV2311-1AC10		3RV2411-1AA10	
	2	1.4...2	3RV2011-1BA10		3RV2111-1BA10		3RV2311-1BC10		3RV2411-1BA10	
	2.5	1.8...2.5	3RV2011-1CA10	6505.-	3RV2111-1CA10	8215.-	3RV2311-1CC10	6365.-	3RV2411-1CA10	10140.-
	3.2	2.2...3.2	3RV2011-1DA10	6690.-	3RV2111-1DA10	8445.-	3RV2311-1DC10	6545.-	3RV2411-1DA10	
	4	2.8...4	3RV2011-1EA10		3RV2111-1EA10		3RV2311-1EC10		3RV2411-1EA10	
	5	3.5...5	3RV2011-1FA10	6755.-	3RV2111-1FA10	8525.-	3RV2311-1FC10	6610.-	3RV2411-1FA10	
	6.3	4.5...6.3	3RV2011-1GA10		3RV2111-1GA10		3RV2311-1GC10		3RV2411-1GA10	
	8	5.5...8	3RV2011-1HA10	7175.-	3RV2111-1HA10	9070.-	3RV2311-1HC10	7020.-	3RV2411-1HA10	11105.-
	10	7...10	3RV2011-1JA10	7240.-	3RV2111-1JA10	9150.-	3RV2311-1JC10	7085.-	3RV2411-1JA10	
	12.5	9...12.5	3RV2011-1KA10	8025.-	3RV2111-1KA10	9675.-	3RV2311-1KC10	7515.-	3RV2411-1KA10	11445.-
	16	10...16	3RV2011-4AA10	9355.-	3RV2111-4AA10	10875.-	3RV2311-4AC10	8460.-	3RV2411-4AA10	
S0	16	10 ... 16	3RV2021-4AA10	9460.-	3RV2121-4AA10	11230.-	3RV2321-4AC10	8555.-	3RV2421-4AA10	12035.-
	20	13 ... 20	3RV2021-4BA10	10105.-	3RV2121-4BA10	12545.-	3RV2321-4BC10	9845.-	3RV2421-4BA10	19985.-
	22	16 ... 22	3RV2021-4CA10		3RV2121-4CA10		3RV2321-4CC10		3RV2421-4CA10	22345.-
	25	18 ... 25	3RV2021-4DA10		3RV2121-4DA10		3RV2321-4DC10		3RV2421-4DA10	—
	28	23 ... 28	3RV2021-4NA10	17030.-	3RV2121-4NA10	28175.-	3RV2321-4NC10	16405.-	—	—
	32	27 ... 32	3RV2021-4EA10		3RV2121-4EA10		3RV2321-4EC10		—	—
	36	30 ... 36	3RV2021-4PA10	19465.-	—	—	3RV2321-4PC10	18925.-	—	—
	40	34 ... 40	3RV2021-4FA10		—	—	3RV2321-4FC10		—	—
S2	25	18 ... 25	3RV2031-4DA10	18160.-	3RV2131-4DA10	28770.-	3RV2331-4DC10	16740.-	3RV2431-4DA10	22810.-
	32	22 ... 32	3RV2031-4EA10		3RV2131-4EA10		3RV2331-4EC10		3RV2431-4EA10	27475.-
	36	28 ... 36	3RV2031-4PA10	19995.-	3RV2131-4PA10	31685.-	3RV2331-4PC10	19135.-	3RV2431-4PA10	30325.-
	40	32 ... 40	3RV2031-4UA10		3RV2131-4UA10		3RV2331-4UC10		3RV2431-4UA10	30895.-
	45	35 ... 45	3RV2031-4VA10	24415.-	3RV2131-4VA10	33285.-	3RV2331-4VC10	23080.-	3RV2431-4VA10	32030.-
	52	42 ... 52	3RV2031-4WA10		3RV2131-4WA10		3RV2331-4WC10		3RV2431-4WA10	—
	59	49 ... 59	3RV2031-4XA10	25200.-	3RV2131-4XA10	34985.-	3RV2331-4XC10	23265.-	3RV2431-4XA10	—
	65	54 ... 65	3RV2031-4JA10		3RV2131-4JA10		3RV2331-4JC10		3RV2431-4JA10	—
S3	73	62 ... 73	3RV2031-4KA10	26440.-	3RV2131-4KA10	36740.-	3RV2331-4KC10	24435.-	—	—
	80	70 ... 80	3RV2031-4RA10		3RV2131-4RA10		3RV2331-4RC10		—	—
	50	36 ... 50	3RV2041-4HA10	25265.-	3RV2142-4HA10	35585.-	3RV2341-4HC10	23195.-	—	—
	63	45 ... 63	3RV2041-4JA10	25500.-	3RV2142-4JA10		3RV2341-4JC10	23410.-	—	—
	75	57 ... 75	3RV2041-4KA10	26770.-	3RV2142-4KA10	37410.-	3RV2341-4KC10	24595.-	—	—
	84	65 ... 84	3RV2041-4RA10		3RV2142-4RA10		3RV2341-4RC10		—	—
	93	75 ... 93	3RV2041-4YA10		3RV2142-4YA10		3RV2341-4YC10		—	—
	100	80 ... 100	3RV2041-4MA10	27015.-	3RV2142-4MA10		3RV2341-4MC10	24825.-	—	—

1) MPCB trips on SC and also on OL

2) MPCB trips on SC and opens contactor on OL

3) MPCB trips on SC

* Spring type terminals are not available for relay function MPCB 3RV21

* 3RV20 and 3RV23: For ordering spring type terminal please replace 11th digit from "1" to "2" (available upto 32A in S00 and S0 only)

Standard packing for all above products is 1 no.

Class 10, without auxiliary switch, increased switching capacity (100kA), screw terminals

MPCB Specifications			MPCB with Standard release ¹⁾		MPCB with "relay function" ²⁾		MPCB with "Mag only" Release ³⁾	
MPCB Size	MPCB rated current A	MPCB overload range A	Type	Unit LP ₹	Type	Unit LP ₹	Type	Unit LP ₹
S2	25	18 ... 25	3RV2032-4DA10	23340.-	-	-	3RV2332-4DC10	20105.-
	32	22 ... 32	3RV2032-4EA10	25270.-	-	-	3RV2332-4EC10	22345.-
	36	28 ... 36	3RV2032-4PA10	27210.-	-	-	3RV2332-4PC10	27670.-
	40	32 ... 40	3RV2032-4UA10	29285.-	-	-	3RV2332-4UC10	27920.-
	45	35 ... 45	3RV2032-4VA10	32395.-	-	-	3RV2332-4VC10	29325.-
	52	42 ... 52	3RV2032-4WA10	32695.-	-	-	3RV2332-4WC10	33310.-
	59	49 ... 59	3RV2032-4XA10	32980.-	-	-	3RV2332-4XC10	33620.-
	65	54 ... 65	3RV2032-4JA10		-	-	3RV2332-4JC10	
	73	62 ... 73	3RV2032-4KA10	37455.-	-	-	3RV2332-4KC10	
	80	70 ... 80	3RV2032-4RA10	39470.-	-	-	3RV2332-4RC10	
S3	40	28 ... 40	3RV2042-4FA10	29330.-	3RV2142-4FA10	32385.-	3RV2342-4FC10	29890.-
	50	36 ... 50	3RV2042-4HA10	32845.-	3RV2142-4HA10	35585.-	3RV2342-4HC10	31725.-
	63	45 ... 63	3RV2042-4JA10	33295.-	3RV2142-4JA10		3RV2342-4JC10	
	75	57 ... 75	3RV2042-4KA10	38035.-	3RV2142-4KA10	37410.-	3RV2342-4KC10	
	84	65 ... 84	3RV2042-4RA10	39720.-	3RV2142-4RA10		3RV2342-4RC10	
	93	75 ... 93	3RV2042-4YA10		3RV2142-4YA10		3RV2342-4YC10	
	100	80 ... 100	3RV2042-4MA10	40090.-	3RV2142-4MA10		3RV2342-4MC10	

Class 20, without auxiliary switch, screw terminals

MPCB Specifications					MPCB with Standard release ¹⁾		Std. pkg. (nos.)
MPCB Size	MPCB rated current A	MPCB overload range A	MPCB Short circuit setting A	Breaking capacity kA	Type ¹⁾	Unit LP ₹	
S2	14	9.5 ... 14	208	65	3RV2031-4SB10	22300.-	1
	17	12 ... 17	260	65	3RV2031-4TB10		1
	20	14 ... 20	260	65	3RV2031-4BB10		1
	25	18 ... 25	325	65	3RV2031-4DB10	24645.-	1
	32	22 ... 32	416	65	3RV2031-4EB10	26385.-	1
	36	28 ... 36	520	65	3RV2031-4PB10	27745.-	1
	40	32 ... 40	585	65	3RV2031-4UB10	29240.-	1
	45	35 ... 45	650	65	3RV2031-4VB10	31965.-	1
	52	42 ... 52	741	65	3RV2031-4WB10	32465.-	1
	59	49 ... 59	845	65	3RV2031-4XB10	32825.-	1
	65	54 ... 65	845	65	3RV2031-4JB10		1
S3	40	28 ... 40	520	100	3RV2042-4FB10	34015.-	1
	50	36 ... 50	650	100	3RV2042-4HB10		1
	63	45 ... 63	819	100	3RV2042-4JB10		1
	75	57 ... 75	975	100	3RV2042-4KB10		1
	84	65 ... 84	1170	100	3RV2042-4RB10		1
	93	75 ... 93	1300	100	3RV2042-4YB10		1
	100	80 ... 100	1300	100	3RV2042-4MB10	34330.-	1

1) MPCB trips on SC and also on OL

2) MPCB trips on SC and opens contactor on OL

3) MPCB trips on SC

Standard packing for all above products is 1 no.


Circuit breaker size S00 for motor protection, Toggle Switch

Rating	Type *	Unit LP ₹	Rating	Type *	Unit LP ₹
0.11...0.16	3RV1011-0AA10	5260.-	1.1...1.6	3RV1011-1AA10	6500.-
0.14 ... 0.2	3RV1011-0BA10		1.4 ... 2	3RV1011-1BA10	
0.18...0.25	3RV1011-0CA10		1.8...2.5	3RV1011-1CA10	
0.22 ... 0.32	3RV1011-0DA10	5560.-	2.2 ... 3	3RV1011-1DA10	6525.-
0.28...0.4	3RV1011-0EA10		2.8...4	3RV1011-1EA10	6815.-
0.35 ... 0.5	3RV1011-0FA10		3.5 ... 5	3RV1011-1FA10	
0.45...0.63	3RV1011-0GA10	6455.-	4.5 ... 6	3RV1011-1GA10	
0.55 ... 0.8	3RV1011-0HA10		5.5 ... 8	3RV1011-1HA10	
0.7...1	3RV1011-0JA10		7 ... 10	3RV1011-1JA10	7485.-
0.9 ... 1.25	3RV1011-0KA10	6500.-	9 ... 12	3RV1011-1KA10	



Standard packing for all above products is 1 no.

* Use with accessories for 3RV2.

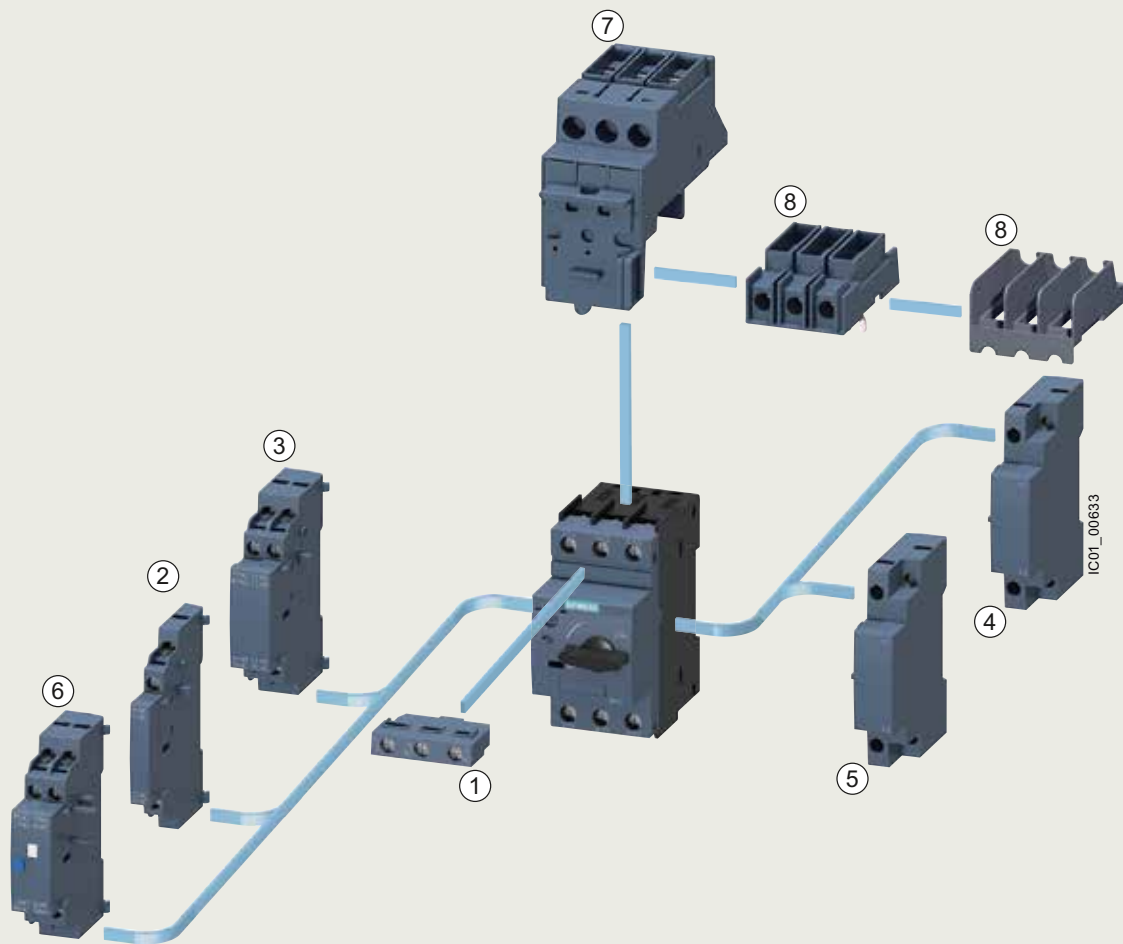

1C01_00633

Accessories complimenting the application

Mountable accessories

- ① Transverse auxiliary switch
- ② Lateral auxiliary switch with 2 contacts
- ③ Lateral auxiliary switch with 4 contacts
- ④ Shunt release (can not be used with 3RV21 motor starter protectors)
- ⑤ Undervoltage release without/with leading contacts (can not be used with 3RV21 motor starter protectors)
- ⑥ Signaling switch (can not be used with 3RV27 and 3RV28 circuit breakers)
- ⑦ Isolator module (can not be used with 3RV2.4, 3RV27 and 3RV28 circuit breakers)
- ⑧ Terminal block type E or phase barriers

www.siemens.co.in

SIEMENS

Accessories for 3RV2

Mountable accessories

Type of accessory	Version	MPCB size	Type*	Unit LP ₹	Std. pkg. (nos.)
Transverse auxiliary switches With screw terminals, mountable on front	1 CO	S00 ... S3	3RV2901-1D#	955.-	1
	1 NO + 1 NC	S00 ... S3	3RV2901-1E	1225.-	1
	2NO	S00 ... S3	3RV2901-1F	1250.-	1
Transverse auxiliary switches for operation in dusty atmospheres and in solid-state circuits with low operating currents	1 CO	S00 ... S3	3RV2901-1G#	3770.-	1
Covers for transverse auxiliary switches		S00 ... S3	3RV2901-0H#	560.-	10
Lateral auxiliary switches with screw terminals mountable on the left	1 NO + 1 NC	S00 ... S3	3RV2901-1A	1355.-	1
	2 NO		3RV2901-1B	1270.-	1
	2 NC		3RV2901-1C		1
	2 NO + 2 NC		3RV2901-1J#	2170.-	1
Signaling switches (Alarm contacts) Mountable on the left side	Separate tripped and short-circuit alarms, 1 NO + 1 NC each	S00 ... S3	3RV2921-1M	2345.-	1
Isolator modules (for isolating individual MPCB)	Lockable in disconnected position	S00, S0	3RV2928-1A#	4955.-	1
		S2 (Up to 65A only)	3RV2938-1A#	5940.-	1
Fuse Monitoring MPCB		S00	3RV16110BD10	9410.-	1

Spring type terminals are not available for this accessory

* For ordering with spring type terminals, please replace 8th digit from '1' to '2'

Type of accessory®	Version	MPCB size	Type*	Unit LP ₹	Std. pkg. (nos.)
Undervoltage trip units, Screw terminals	24 V DC	S00 ... S3	3RV2902-1AB4#	9090.-	1
	110 V AC 50Hz / 120 V AC 60Hz		3RV2902-1AF0#	3370.-	1
	230 V AC 50Hz / 240 V AC 60Hz		3RV2902-1AP0		1
	400 V AC 50Hz / 440 V AC 60Hz		3RV2902-1AV0		1
Shunt trip units, Screw terminals	20...24V 50/60 Hz (100% ON period)		3RV2902-1DB0	3370.-	1
	20...70V 50/60Hz, DC (5s ON period)		3RV2902-1DF0		1
	90...110V 50/60 Hz (100% ON period)				
	70...190V 50/60Hz, DC (5s ON period)		3RV2902-1DP0		1
	210...240V 50/60 Hz (100% ON period)				
	190...330V 50/60Hz, DC (5s ON period)		3RV2902-1DV0#		1
	350...415V 50/60 Hz (100% ON period)				
	330...500V 50/60Hz, DC (5s ON period)				

Spring type terminals are not available for this accessory

* For ordering with spring type terminals, please replace 8th digit from '1' to '2'

@ One auxiliary release can be mounted on the right side. (does not apply to 3RV11 motor starter protectors with overload relay function)

Accessories for 3RV2 / 3RV1

Fixing accessories

Type of accessory	Version	For MPCB size	Type*	Unit LP ₹	Std. pkg. (nos.)
Push-in lugs	For screwing the motor starter protector onto mounting plates. For each motor starter protector, 2 units are required.	For 3RV1: S00,S0	3RB1900-0B	30.-	(1 pack = 10 pcs)
Push-in lugs		For 3RV2: S00,S0	3RV2928-0B	25.-	(1 pack = 10 pcs)

Enclosure With EMERGENCY STOP rotary operating mechanism, Lockable in 0 position

Degree of protection	Integrated terminals	Installation width (for switch + lateral auxiliary switch)	For MPCB size	Type*	Unit LP ₹	Std. pkg. (nos.)
IP55	N and PE	54 mm	S00, S0	3RV1923-1FA00	2370.-	1
		82 mm	S2	3RV1933-1GA00	7720.-	1

Accessories for 3RV2 / 3RV1

Door-coupling rotary operating mechanism

Description	Size	Type	Unit LP ₹	Std. pkg. (nos.)
Door operating mechanism with door interlock, defeat facility, padlocking facility. Extension shaft 300mm (fixed coupler) Breaker operating kit & front drive for size	S00, S0	3RV19261B-Z®	3805.-	1
	S2	3RV19361B-Z®	4205.-	1
	S3\$	3RV19461B-Z®	5530.-	1
Front drive – fixed coupler (available as spare)	S00, S0, S2, S3	8UC626#	1285.-	1

@ One set available with breaker operator kit and 8UC front drive together

MRP

\$ To use door-operating mechanism, on 3RV2 - Size S3, the knob attachment on breaker must be disassembled.

Busbar accessories

Type of accessory	Version	Conductor cross-section			For MPCB size	Type	Unit LP ₹	Std. pkg. (nos.)
		Solid or stranded	Finely stranded with end sleeve	AWG cable, solid or stranded				
		mm ²	mm ²	AWG				
3-phase Infeed terminals	Connection from top	2.5...25	2.5...16	10 ... 4	3RV2 S00, S0	3RV2925-5AB	1845.-	1
		2 x (2.5 ... 50) ²⁾	2 x (2.5 ... 35) ²⁾	2 x (10.. 1/0) ²⁾	3RV2 S2	3RV2935-5A	1940.-	1
		1 x (2.5 ... 70) ²⁾	1 x (2.5 ... 50) ²⁾	1 x (10 ... 2/0) ²⁾				
	Connection from bottom*	2.5...25	2.5...16	10 ... 4	3RV2 S00, S0	3RV2915-5B		1



* This terminal is connected in place of a switch, please take the space requirement into account.

2) If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.



Accessories for 3RV2 / 3RV1

Busbar accessories

Type of accessory ¹⁾	Modular spacing mm	Number of MPCBs that can be connected			Current rating at 690V A	For MPCB size *	Type	Unit LP ₹	Std. pkg. (nos.)
		Without lateral accessories	With lateral auxiliary switch	Incl. auxiliary release					
3-phase busbar system	45 ³⁾	2	–	–	63	S00, S0	3RV1915-1AB	1560.-	1
		3	–	–		S00, S0	3RV1915-1BB	1670.-	1
		4	–	–		S00, S0	3RV1915-1CB	2370.-	1
		5	–	–		S00, S0	3RV1915-1DB	2685.-	1
	55 ⁴⁾	–	2	–		S00, S0	3RV1915-2AB	1595.-	1
		–	3	–		S00, S0	3RV1915-2BB	1670.-	1
		–	4	–		S00, S0	3RV1915-2CB	2275.-	1
		–	5	–		S00, S0	3RV1915-2DB	2685.-	1
		2			108	S2	3RV1935-1A	2290.-	1
		3					3RV1935-1B	2875.-	1
		4					3RV1935-1C	3520.-	1
	63 ⁵⁾	–	–	2	63	S00, S0	3RV1915-3AB	2060.-	1
		–	–	4		S00, S0	3RV1915-3CB	2695.-	1
	75 ⁵⁾	–	2	2	108	S2	3RV1935-3A	3520.-	1
		–	3	3			3RV1935-3B	3275.-	1
		–	4	4			3RV1935-3C	4630.-	1
Covers for connection tags (Touch protection for empty positions)					S00, S0	3RV1915-6AB	235.-	10	
					S2	3RV1935-6A	425.-	5	



1) Not suitable for 3RV21 MPCBs with overload relay function

3) Auxiliary releases and lateral auxiliary switches cannot be used in combination.

4) For 3RV2 MPCB with auxiliary switches 2 NO and 2 NC mounted on the left (9 mm wide).

5) For 3RV2 MPCB with mounted accessories (18 mm wide). Auxiliary switches with 2 NO + 2 NC or signaling switch (mounted on the left) or with auxiliary release (mounted on the right).

* Approved for motor starter protectors size S0, up to 32 A.

Mounting accessories

Type of accessory	Version	For MPCB size	Type*	Unit LP ₹	Std. pkg. (nos.)
Scale covers, for covering the set current scale		3RV20, 3RV21, 3RV24: S00 ... S2	3RV2908-0P	130.-	10
Covers for devices with box terminals	2 units required per device (Main current level)	3RV2 S2	3RT2936-4EA2	235.-	1





Continuing the Legacy...

3VS Motor Protection Circuit Breakers

www.siemens.co.in


MPCBs for motor protection

Overload release range A	Type (w/o aux. contact)	Unit LP ₹	Type (with 1NO+1NC)	Unit LP ₹	Std. pkg. (nos)
0.1 - 0.16	3VS1300-0MB00	4120.-	3VS1300-1MB00	4940.-	1
0.16 - 0.24	3VS1300-0MC00		3VS1300-1MC00		1
0.24 - 0.4	3VS1300-0MD00		3VS1300-1MD00		1
0.4 - 0.6	3VS1300-0ME00	4795.-	3VS1300-1ME00	5620.-	1
0.6 - 1	3VS1300-0MF00		3VS1300-1MF00	5670.-	1
1 - 1.6	3VS1300-0MG00	4830.-	3VS1300-1MG00	5725.-	1
1.6 - 2.4	3VS1300-0MH00		3VS1300-1MH00		1
2 - 3.2	3VS1300-0NH00	5055.-	3VS1300-1NH00	5780.-	1
2.4 - 4	3VS1300-0MJ00		3VS1300-1MJ00		1
3.2 - 5	3VS1300-0NJ00		3VS1300-1NJ00		1
4 - 6	3VS1300-0MK00		3VS1300-1MK00		1
5 - 8	3VS1300-0NK00	5105.-	3VS1300-1NK00	5835.-	1
6 - 10	3VS1300-0ML00		3VS1300-1ML00	5835.-	1
8 - 13	3VS1300-0NL00	5865.-	3VS1300-1NL00	6585.-	1
10 - 16	3VS1300-0MM00	6140.-	3VS1300-1MM00	6895.-	1
14 - 20	3VS1300-0MN00	6260.-	3VS1300-1MN00	7025.-	1
18 - 25	3VS1300-0MP00	6980.-	3VS1300-1MP00	7495.-	1
6 - 10	3VS1600-0ML00	11410.-	3VS1600-1ML00	12870.-	1
10 - 16	3VS1600-0MM00	11410.-	3VS1600-1MM00		1
16 - 25	3VS1600-0MN00	12585.-	3VS1600-1MN00	14105.-	1
22 - 32	3VS1600-0MP00	13375.-	3VS1600-1MP00	14235.-	1
28 - 40	3VS1600-0MQ00	15030.-	3VS1600-1MQ00	15795.-	1
36 - 52	3VS1600-0MR00		3VS1600-1MR00		1

Accessories are common for 3VS & 3VU

Accessories for 3VS/3VU

Description	Version	Type	Unit LP ₹	Std. pkg. (nos.)
Add-on aux. block	1 NO + 1 NC	■ 3VU9131-3AA00	1200.-	1
Short-circuit signaling switch	1 NO + 1 NC	■ 3VU9131-7AA00	1380.-	1
Undervoltage release	230 V, 50 Hz	3VU9132-0AB15	3290.-	1
Shunt trip	230 V, 50 Hz 24 V, 50 Hz DC 110-240 V	3VU9132-0AB55 3VU9132-0AB50 3VU9132-0AB73	3255.- 3290.- 3290.-	1 1 1
Toggle padlocking device	Locking in Off pos	3VU9168-0KA00	885.-	1



3TF-3VS/3VU Connector**

MPCB		Contactor		Type of Connector	Unit LP ₹	Std. pkg. (nos.)
Type	Current	Type Rating	AC3 Current Rating			
3VS13/3VU13	0.16 to 20A	3TF30 / 31	9 / 12 A	3TS9001-8K	390.-	1
3VS13/3VU13	6 to 25A	3TF32 / 33	16 / 22A	3TS9002-8K	460.-	1

** For more details refer page no. 38

Three-phase busbar for 3VS13/3VU13 only	In feed terminal (63 A)	3VU9135-1BB01	1645.-	1
	busbars for 2 MPCBs	3VU9135-1AB02	1315.-	1
	busbars for 3 MPCBs	3VU9135-1AB03	1590.-	1
	busbars for 4 MPCBs	3VU9135-1AB04	2045.-	1
	busbars for 5 MPCBs	3VU9135-1AB05	2300.-	1
Door operating mechanism with door interlock, defeat facility, pad locking facility, extension shaft 300mm	Breaker operating kit & front drive (fixed coupler) for 3VS13/3VU13 for 3VS16/3VU16	■ 3VU9133-Z® ■ 3VU9163-Z®	3415.- 3635.-	1 1
Front drive for 3VS & 3VU	Fixed coupler	■ 8UC616#	1135.-	1

@ 1 set available with breaker operator kit and 8UC front drive together

MRP



■ Stock items

Please order in multiples of standard packing.

LP - List Price

SIEMENS



SIRIUS 3RW Soft Starters

As versatile as your application

www.siemens.co.in

Strong portfolio:
comprehensive, co-ordinated soft starter portfolio



Intelligent operation:
concentrated, application-specific functionality



Efficient switching:
hybrid switching technology on board



Ready for a digital future:
data available whenever and wherever needed



Digital soft starters - SIRIUS 3RW30/40/50



3RW30

From 1.5 - 55 kW

- Compact design
- Integrated bypass contact system
- Soft start
- Innovative 2-phase "Polarity Balancing" operation



3RW40

From 5.5 - 55 kW

- Soft start, soft stop, adjustable current limit.
- Integrated bypass contact system
- Integrated microprocessor based overload relay with adjustable trip class 10/15/20.
- Intrinsic device protection to protect against thermal overloading of thyristors.
- Integrated state and fault monitoring
- Innovative 2-phase "Polarity Balancing" operation



NEW

3RW50

From 75 to 315 kW

- Soft starting and smooth ramp-down due to soft torque function
- Hybrid-switching technology with 2-phase control
- Parameterization via rotary coding switches
- ATEX/IECEx certified – hence suitable for motors in potentially explosive atmosphere
- Optional HMI modules and communication modules (external connection)
- Optional TIA integration

Rated operating voltage U _e , In line circuit V AC	Motor rating at 415V, 40°C, normal starting, in line circuit kW	Rated operating current I _e (AC-53a) A (40°C/50°C/60°C)	Type	Unit LP ₹	Std. pkg. (nos)
200-480	1.5	3.6/3.3/3	3RW3013-1BB\$4	16395.-	1
200-480	3	6.5/6/5.5	3RW3014-1BB\$4	19025.-	1
200-480	4	9/8/7	3RW3016-1BB\$4	21800.-	1
200-480	5.5	12.5/12/11	3RW3017-1BB\$4	25825.-	1
200-480	7.5	17.6/17/14	3RW3018-1BB\$4	31085.-	1
200-480	11	25.3/23/21	3RW3026-1BB\$4	34335.-	1
200-480	15	32.2/29/26	3RW3027-1BB\$4	44845.-	1
200-480	18.5	38/34/31	3RW3028-1BB\$4	55990.-	1
200-480	22	45/42/39	3RW3036-1BB\$4	60930.-	1
200-480	30	65/58/53	3RW3037-1BB\$4	82880.-	1
200-480	37	72/62.1/60	3RW3038-1BB\$4	102055.-	1
200-480	45	80/73/66	3RW3046-1BB\$4	114430.-	1
200-480	55	106/98/90	3RW3047-1BB\$4	126800.-	1

\$ Order No. supplement for rated control supply voltage U_s

• 24 V AC/DC 0

• 110 ... 230 V AC/DC 1

Rated operating voltage U _e , In line circuit V AC	Motor rating at 415V, 40°C, normal starting, in line circuit kW	Rated operating current I _e (AC-53a) A (40°C/50°C/60°C)	Type	Unit LP ₹	Std. pkg. (nos)
200...480	5.5	12.5 / 11 / 10	3RW4024-1BB\$4	45115.-	1
200...480	11	25 / 23 / 21	3RW4026-1BB\$4	55735.-	1
200...480	15	32 / 29 / 26	3RW4027-1BB\$4	69040.-	1
200...480	18.5	38 / 34 / 31	3RW4028-1BB\$4	84965.-	1
200...480	22	45 / 42 / 39	3RW4036-1BB\$4	96325.-	1
200...480	30	63 / 58 / 53	3RW4037-1BB\$4	113770.-	1
200...480	37	72 / 62 / 60	3RW4038-1BB\$4	128925.-	1
200...480	45	80 / 73 / 66	3RW4046-1BB\$4	145370.-	1
200...480	55	106 / 98 / 90	3RW4047-1BB\$4	161810.-	1

\$ Control Voltage Code:

• 24 V AC/DC 0

• 110 ... 230 V AC/DC 1

For ordering 3RW40 soft starters with thermistor protection in the above range:

- Add ₹ 10425.- to corresponding prices and
- Change the 9th digit in the type reference to 'T' from 'B'.

NEW

Rated operating voltage U _e , In line circuit V AC	Motor rating at 415V, 40°C, normal starting, in line circuit kW	Rated operating current I _e (AC-53a) A (40°C/50°C)	Type	Unit LP ₹	Std. pkg. (nos)
200 ... 480	75	143 / 128	3RW5055-6AB\$4	193960.-	1
200 ... 480	90	171 / 153	3RW5056-6AB\$4	239605.-	1
200 ... 480	110	210 / 186	3RW5072-6AB\$4	266860.-	1
200 ... 480	132	250 / 220	3RW5073-6AB\$4	273825.-	1
200 ... 480	160	315 / 279	3RW5074-6AB\$4	330885.-	1
200 ... 480	200	370 / 328	3RW5075-6AB\$4	365100.-	1
200 ... 480	250	470 / 416	3RW5076-6AB\$4	399330.-	1
200 ... 480	315	570 / 504	3RW5077-6AB\$4	426875.-	1

\$ Control Voltage Code:

• 24 V AC/DC 0

• 110 ... 230 V AC/DC 1

- For 3RW50 with operating voltage U_e 200...600V AC: Change the last digit of MLFB from "4" to "5" and increase the standard operating voltage list price by 15%.
- For 3RW50 with thermistor motor protection change the 9th digit of MLFB from "A" to "T"

SIRIUS 3RW52-Standard Applications

From 5.5 - 315kW

- Main Voltage: 200-480V & 200-600V
- Bypass System: Integrated (Hybrid technology)
- Controlled Phases: 3
- Connection Type: Standard & Inside Delta
- Control Voltage: 24V AC/DC & 110-250V AC
- Motor over load protection class: 10A, 10E, 20E
- Analog output: 0-10V & 4-20mA (Optional)
- Communication protocol (Optional) - PN-Std, PN-HF, PB, MB-TCP, MB-RTU
- Operator Panel: Standard and High features HMI (Optional)



Rated operating voltage U _e , in line circuit V AC	Motor rating at 415V, 40°C, normal starting, (in line circuit) kW	Motor rating at 415V, 40°C, normal starting, (in delta circuit) kW	Rated operating current I _e (AC-53a) A (40°C/50°C)	Type	Unit LP ₹	Std. pkg. (nos)
200...480	5.5	11	13/11.5	3RW5213-1AC\$4	76195.-	1
200...480	7.5	15	18/15.9	3RW5214-1AC\$4	84660.-	1
200...480	11	18.5	25/22.3	3RW5215-1AC\$4	97350.-	1
200...480	15	22	32/28.4	3RW5216-1AC\$4	102885.-	1
200...480	18.5	30	38/33.5	3RW5217-1AC\$4	121270.-	1
200...480	22	45	47/41.6	3RW5224-1AC\$4	128610.-	1
200...480	30	55	63/55.5	3RW5225-1AC\$4	154340.-	1
200...480	37	75	77/68	3RW5226-1AC\$4	183730.-	1
200...480	45	90	93/82.5	3RW5227-1AC\$4	231480.-	1
200...480	55	110	113/101	3RW5234-6AC\$4	268240.-	1
200...480	75	132	143/128	3RW5235-6AC\$4	293960.-	1
200...480	90	160	171/151	3RW5236-6AC\$4	303440.-	1
200...480	110	200	210/186	3RW5243-6AC\$4	313675.-	1
200...480	132	250	250/220	3RW5244-6AC\$4	340570.-	1
200...480	160	315	315/279	3RW5245-6AC\$4	367445.-	1
200...480	200	355	370/328	3RW5246-6AC\$4	433585.-	1
200...480	250	400	470/416	3RW5247-6AC\$4	492935.-	1
200...480	315	560	570/504	3RW5248-6AC\$4	624645.-	1

\$ Control voltage code:

• 24V AC/DC 0

• 110----250 V AC 1

* – For 3RW52 with operating voltage U_e 200...600V AC - change the last digit of MLFB from "4" to "5" and increase the standard operating voltage list price by 15%.

– For 3RW52 with thermistor motor protection, change the 9th digit of MLFB from "A" to "T"

Note: Commissioning service is available at extra cost.

In the event of deviating conditions or higher switching frequency, it may be necessary to choose a larger unit.

Siemens recommends use of selection and simulation program
Simulation Tool for Soft Starters (STS).

Refer technical specifications for more details.

For more details, please visit: www.siemens.com/softstarter

Soft Starter selection made handy!

with few clicks on your mobile



3RW55: for heavy duty and high end applications

From 5.5 - 315 kW

- Main Voltage: 200-480V & 200-690V
- Bypass System: Integrated (Hybrid technology)
- Controlled Phases: 3
- Connection Type: Standard & Inside Delta
- Control Voltage: 24V AC/DC & 110-250V AC
- Motor over load protection class: 5/10/15/20/30
- Analog output: 0-10V & 4-20mA (Optional)
- Communication protocol (Optional) - PN-Std, PN-HF, PB, MB-TCP, MB-RTU
- Operator Panel: High features HMI
- Optionally available Failsafe Variant
- With unique Autoparameterisation feature

NEW



Rated operating voltage U _e , in line circuit V AC	Motor rating at 415V, 40°C, normal starting, (in line circuit) kW	Motor rating at 415V, 40°C, normal starting, (in delta circuit) kW	Rated operating current I _e (AC-53a) A (40°C/50°C)	Type	Unit LP ₹	Std. pkg. (nos)
200...480	5.5	11	13/11.5	3RW5513-1HA\$4	93595.-	1
200...480	7.5	15	18/15.9	3RW5514-1HA\$4	99560.-	1
200...480	11	18.5	25/22.3	3RW5515-1HA\$4	117135.-	1
200...480	15	22	32/28.4	3RW5516-1HA\$4	137805.-	1
200...480	18.5	30	38/33.5	3RW5517-1HA\$4	162430.-	1
200...480	22	45	47/41.6	3RW5524-1HA\$4	172260.-	1
200...480	30	55	63/55.5	3RW5525-1HA\$4	206715.-	1
200...480	37	75	77/68	3RW5526-1HA\$4	246085.-	1
200...480	45	90	93/82.5	3RW5527-1HA\$4	310060.-	1
200...480	55	110	113/101	3RW5534-6HA\$4	359285.-	1
200...480	75	132	143/128	3RW5535-6HA\$4	393755.-	1
200...480	90	160	171/151	3RW5536-6HA\$4	406435.-	1
200...480	110	200	210/186	3RW5543-6HA\$4	420150.-	1
230...480	132	250	250/220	3RW5544-6HA\$4	456170.-	1
230...480	160	315	315/279	3RW5545-6HA\$4	492160.-	1
230...480	200	355	370/328	3RW5546-6HA\$4	580755.-	1
230...480	250	400	470/416	3RW5547-6HA\$4	660250.-	1
230...480	315	560	570/504	3RW5548-6HA\$4	836685.-	1
200...480	355	630	630/561	3RW5552-6HA\$4	1105900.-	1
200...480	400	710	720/641	3RW5553-6HA\$4	Upon Request	1
200...480	450	800	840/748	3RW5554-6HA\$4		1
200...480	560	1000	1100/979	3RW5556-6HA\$4		1
200...480	710	1200	1280/1139	3RW5558-6HA\$4		1

\$ Control voltage code:


• 24V AC/DC 0

• 115---250 V AC 1

- For 3RW55 with operating voltage U_e 200...690V AC: Change the last digit of MLFB from "4" to "6" and increase the standard operating voltage list price by 30%.
- For 3RW55 with fail safe variant: Change the 10th digit of MLFB from "A" to "F" and increase the standard operating voltage list price by 15% (available up to 315kW)

Accessories for 3RW55/3RW52

Description	Type	Unit LP ₹	Std. pkg. (nos.)
Profibus communication module	3RW5980-0CP00	48065.-	1
ProfiNET communication module	3RW5980-0CS00	54075.-	1
Modbus TCP	3RW5980-0CT00	48065.-	1
External display - Standard HMI	3RW5980-0HS00	16835.-	1
External display - High Featured HMI	3RW5980-0HF00	48630.-	1
Connection cable for Door Mounting of HMI display module	(5 mtr - Flat)	3RW5980-0HC60	11675.-
	(0.1 mtr - Flat)	3UF7931-0AA00-0	1430.-
	(0.5 mtr - Flat)	3UF7932-0BA00-0	4275.-
	(1 mtr - Round)	3UF7937-0BA00-0	4755.-
	(2.5 mtr - Round)	3UF7933-0BA00-0	5115.-
SIRIUS Soft Starter ES V16 Professional	License key on USB flash drive	3ZS1320-6CC12-0YA5	122360.-
	License key downloaded	3ZS1320-6CE12-0YB5	115920.-

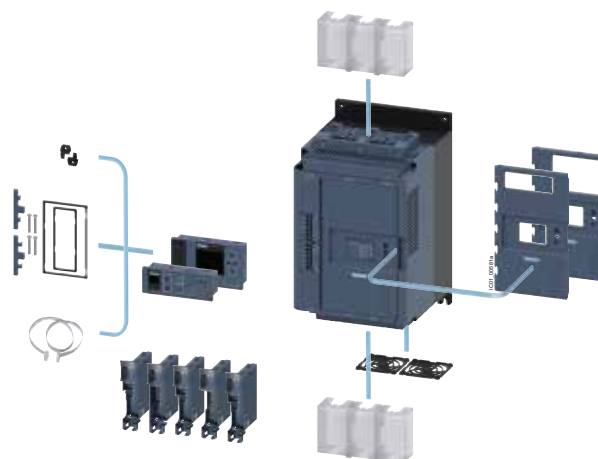

Note: Commissioning service is available at extra cost.

Siemens recommends use of selection and simulation program **Simulation Tool for Soft Starters (STS)**.

For more details, please visit: www.siemens.com/softstarter

Simple installation ▶
Thanks to push-in technology.

Wide range of performance ▶
For motors up to 5.5 kW.


Hybrid switching technology ▶
Durable and energy-saving, since
relay contacts are
not subject to loading.

Safety Integrated ▶
Versatile safety solutions:
shutdown via SIMATIC F-CPU or
SIRIUS 3SK safety relay.

Quick stop and limit position disconnecter ▶
Load switch off even at high speed –
independent of central controller.

Space requirements reduced by up to 50% ▶
Just 30 mm wide, it is much slimmer
than other distributed I/O systems.

Power bus ▶
Automatic setup with side-by-side
mounting of multiple modules.

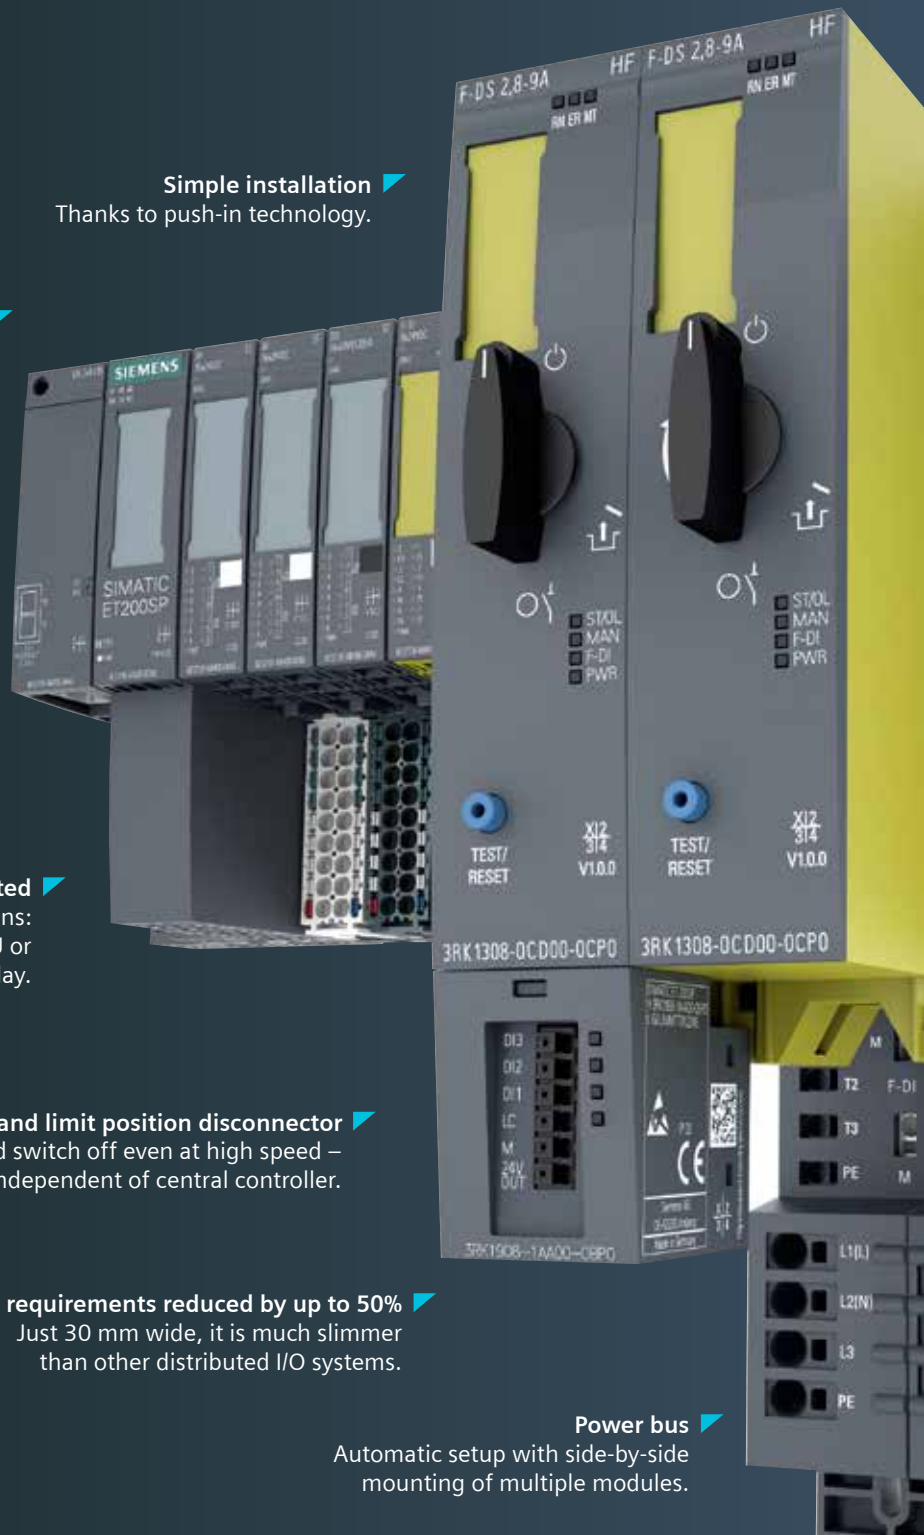

ET 200SP - Motor starters up to 5.5 kW

Compact & Intelligent

www.siemens.co.in

SIEMENS



Start-up with a small footprint – **SIRIUS 3RM1 Motor Starter**

Multifunctional with a width of just 22.5mm

www.siemens.co.in

3RM1 Compact Starters – DOL and RDOL

Rated operational voltage Ue	Description	Type	Unit LP ₹
48–500V	DOL, upto 0.12KW	3RM10011AA.4	31230.-
48–500V	DOL, 0.09 to 0.75KW	3RM10021AA.4	31230.-
48–500V	DOL, 0.55 to 3KW	3RM10071AA.4	31230.-
48–500V	RDOL, upto 0.12KW	3RM12011AA.4	34000.-
48–500V	RDOL, 0.09 to 0.75KW	3RM12021AA.4	34000.-
48–500V	RDOL, 0.55 to 3KW	3RM12071AA.4	34000.-


Control voltage code @50Hz:

• 24V AC/DC 0

• 110–230V AC, 110V DC 1

Accessories

Description	Type	Unit LP ₹
3-phase busbar for 2 3RM1	3RM19101AA	Upon Request
3-phase busbar for 3 3RM1	3RM19101BA	Upon Request
3-phase busbar for 5 3RM1	3RM19101DA	Upon Request
CAP for busbar of 3RM1	3RM19106AA	Upon Request
3-PHASE FEED-IN TERMINAL 3RM1	3RM19201AA	Upon Request

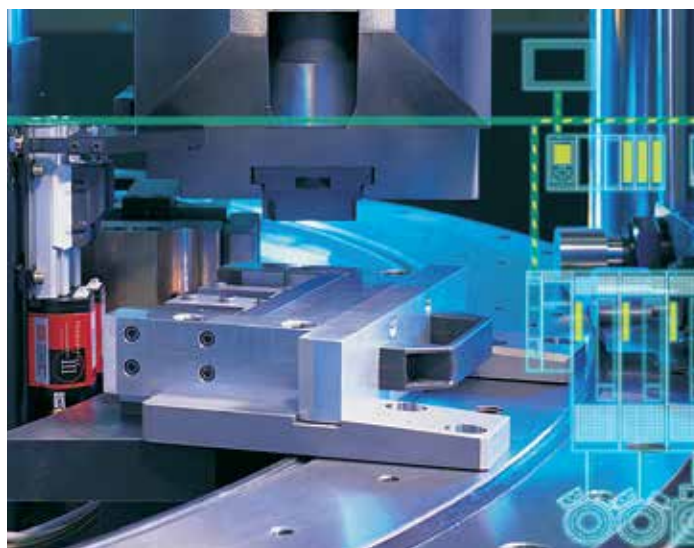



Agriculture Starter complying to latest standards

Automatic Star Delta Starters IEC 60947-4-1: 2012 Compliant

Direct-on-Line Starters ISI Marked-BIS Approved

www.siemens.co.in

SIEMENS

Agriculture Starters

NEW



DOL

Starter in S. S. housing, incl. birelay with SPP

Motor rating at 415V, 3ph, 50Hz		Type ¹⁾ (DOL)	Relay range A	Unit MRP ₹	Std. pkg. (nos.)
HP	kW				
0.33	0.25	3TW72911A.64	0.63-1	Refer RAJA+ Pricelist	1
0.75	0.55	3TW72911A.66	1-1.6		1
1	0.75	3TW72911A.68	1.6-2.5		1
1.5	1.1	3TW72911A.69	2-3.2		1
2	1.5	3TW72911A.71	3.2-5		1
3	2.2	3TW72911A.72	4-6.3		1
5	3.7	3TW72911A.74	6.3-10		1
–	–	3TW72911A.75	8-12.5		1
7.5	5.5	3TW72911A.77	10-16		1
10	7.5	3TW72911A.78	12.5-20		1

¹⁾ Enter code for coil voltage, 50Hz (B for 200-400V, W for 415V)

RAJA+ DOL Starters 3TW72931A... (0.33-5HP) with 18A contactor are IEC 60947-4-1: 2012 compliant without ISI mark

Star Delta

Automatic starter in S.S. housing, incl. birelay with SPP

Motor rating at 415V, 3ph, 50Hz		Type ⁴⁾ (ASD)	Relay range A	Unit MRP ₹	Std. pkg. (nos.)
HP	kW				
10	7.5	3TE72910AW74	6.3-10	Refer RAJA+ Pricelist	1
12.5	9.3	3TE72910A.75	8-12.5		1
15	11	3TE72910A.77	10-16		1
20	15	3TE72910A.78	12.5-20		1
25	18.5	3TE72910A.79	16-25		1

⁴⁾ Enter code for coil voltage, 50Hz (B for 200-400V, W for 415V)

Industrial Starters

DOL

DOL Starter in S.S.housing
(without birelay - to be ordered separately)

Motor rating at 415V, 3ph, 50Hz		Type ²⁾ (DOL)	Birelay (recommended)	Unit LP ₹	Std. pkg. (nos.)
HP	kW				
15	11	3TW7493-2AR0*	3US5200-2C8K (16-25A)	7945.-	1
20	15	3TW7494-2A..	3US5600-2D8K (20-32A)	9760.-	1
25	18.5	3TW7495-2A..	3US5600-2Q8K (25-36A)	11150.-	1
30	22	3TW7496-2A..	3US5800-2F8K (32-50A)	13750.-	1
40	30	3TW7497-2A..	3US5800-2T8K (40-57A)	17535.-	1
50	37	3TW7498-2A..	3US5800-2V8K (57-70A)	22745.-	1
60	45	3TW7499-2A..	3US5800-8Y8K (70-95A)	25450.-	1
75	55	3TW7590-2A..	3US5800-5C8K (85-105A)	31890.-	1

* Only coil voltage of 415V 50Hz available

²⁾ Enter code for coil voltage, 50Hz ("R0" for 415V, "P0" for 230V)

† 3TE75 have in-built birelay whereas 3TE74 doesn't have in-built birelay

For selection and LPs of spares for Industrial Starter contact sales

Star Delta

Automatic Star delta starter in S.S. housing
(without birelay - to be ordered separately)

Motor rating at 415V, 3ph, 50Hz		Type ²⁾ (ASD)	Birelay (recommended)	Unit LP ₹	Std. pkg. (nos.)
HP	kW				
30	22	3TE7493-2A..	3US5600-2C8K (16-25 A)	28275.-	1
40	30	3TE7494-2A..	3US5600-2D8K (20-32 A)	29625.-	1
50	37	3TE7495-2A..	3US5600-2R8K (32-40 A)	41370.-	1
60	45	3TE7496-2A..	3US5800-2F8K (32-50 A)	58685.-	1
75	55	3TE7497-2A..	3US5800-2T8K (40-57 A)	71815.-	1
100	75	3TE7594-2AR0*†	3US58 00-8Y8K (70-95A)†	102200.-	1
125	90	3TE7595-2AR0*†	3US58 00-8Y8K (70-95A)†	105215.-	1
150	110	3TE7596-2AR0*†	3US58 00-5D8K (95-120A)†	106710.-	1
180	132	3TE7597-2AR0*†	3US62 20-5B8K (115-180A)†	114225.-	1

Spares for starters

Spares for 3TW7 Starters

Description	Type	Unit MRP ₹	Std. pkg. (nos.)
Contact for 200-400V	3TS3010-0AZ608KA0	1390.-	1
Contact for 200-400V	3TS3210-0AZ608KA0	1815.-	1
Contact for 415V	3TS3010-0AR008KA0	1390.-	1
Contact for 415V	3TS3210-0AR008KA0	1815.-	1
Relay	3UW5102-##	2170.-	1
Coil for 200-400V	3TY7403-0AZ6	950.-	10
Coil for 415V	3TY7403-0AR0	905.-	10

The spares shall be used with starters only.

Contact Sales

Code for 3UW51/52 relay range

Relay range	0.63-1	1-1.6	1.6-2.5	2-3.2	3.2-5	4-6.3	6.3-10	8-12.5	10-16	12.5-20	16-25
Code	0J	1A	1C	1D	1F	1G	1J	1K	2A	2B	2C

Spares for 3TE7 Starters

Description	Type	Unit MRP ₹	Std. pkg. (nos.)
Contact for 200-400V	3TS3010-0AZ608K	1315.-	1
Contact for 415V	3TS3010-0AR008K	1315.-	1
Contact for 200-400V	3TS3210-0AZ608K	1730.-	1
Contact for 415V	3TS3210-0AR008K	1620.-	1
Contact for 200-400V	3TS3300-0AZ608K	2310.-	1
Contact for 415V	3TS3300-0AR008K	2085.-	1
Relay	3UW5102-##	2170.-	1
Relay	3UW5202##	2265.-	1
Coil for 200-400V	3TY7403-0AZ6	950.-	10
Coil for 415V	3TY7403-0AR0	905.-	10

Water level controller



Description			Type	Unit MRP ₹	Std. pkg. (nos.)
Water level controller relay	110-240V AC/DC	Single tank (suction or filling) or dual tank (suction and filling) monitoring	7UG0885-1JU20	2205.-	1
Sensor for water level controller relay	Pack of 3 sensor		7UG0985-0YY00	660.-	1



Electronic timers - 3RP



Function	Time range	Input voltage		Type	Unit LP ₹	Std. pkg (nos.).
		AC (50/60Hz)	DC			
On-delay with 1C/O contacts	0.5 – 10 sec	24/100-127 24/200-240	24 24	■ 3RP1511-1AQ308K ■ 3RP1511-1AP308K	2655.-	1 1
	5 – 100 sec	24/100-127 24/200-240	24 24	■ 3RP1513-1AQ308K ■ 3RP1513-1AP308K	2665.-	1 1
	0.05 sec to 100 Hrs. (15 time setting ranges)	24/100-127 24/200-240	24 24	■ 3RP1525-1AQ308K ■ 3RP1525-1AP308K	2665.-	1 1
		24 to 240	24 to 240	■ 3RP1525-1BW308K#	5280.-	1
Off-delay with 1C/O contacts	0.5 – 10 sec	24/100-127 24/200-240	24 24	■ 3RP1531-1AQ308K ■ 3RP1531-1AP308K	3530.-	1 1
	5 – 100 sec	24/100-127 24/200-240	24 24	■ 3RP1533-1AQ308K ■ 3RP1533-1AP308K	3580.-	1 1
Multi-function with 1C/O contacts	0.05 sec to 100 Hrs. (15 time setting ranges)	24 - 240	24 - 240	■ 3RP1505-1AW308K	5450.-	1
	Label set - 8 functions (On delay, Off delay, On+Off delay, flashing, pulse make contact, pulse break contact, pulse shaping and additive ON delay)			3RP1901-0A8K*	1135.-	1 pack
Star-Delta 1NO inst & 1NO delayed	1 – 20 sec	200-240 / 380-440V AC		3RP1574-1NM208K	2690.-	1
	3 – 60 sec	24/100-127	24	■ 3RP1576-1NQ308K	2750.-	1
		24/200-240	24	■ 3RP1576-1NP308K	2750.-	1
		200-240/380-440V AC		■ 3RP1576-1NM208K	2835.-.®	1
		230-400V AC		■ 3RP1576-1NP208K	2835.-.®	1
Push-in lug (for mounting 3RP timer with screws)				3RP19038K (1 pack = 10 pcs)	235.-	1 pack

with 2C/O contacts \$ Price per pack * 1 pack consists of 1 label set

For 7PV0 timer portfolio refer page no. 71

@ Prices mentioned are at MRP

3RR2 Current monitoring relays

The relays can be installed as a stand-alone unit using the suitable terminal bracket.



Screw Terminals

Size of relay / contactor	Set current value of the inverse-time delayed overload release A	Supply voltage	Type*	Unit LP ₹	Std. pkg. (nos.)
Basic Version					
S00	1.6...16	24V AC/DC	3RR2141-1AA30	14785.-	1
	1.6...16	24...240V AC/DC	3RR2141-1AW30	16100.-	1
S0	4 ... 40	24V AC/DC	3RR2142-1AA30	18605.-	1
	4 ... 40	24...240V AC/DC	3RR2142-1AW30	19880.-	1

Size of relay / contactor	Set current value of the inverse-time delayed overload release A	Supply voltage	Type*	Unit LP ₹	Std. pkg. (nos.)
Standard Version					
S00	1.6...16	24V AC/DC	3RR2241-1FA30	30160.-	1
	1.6...16	24...240V AC/DC	3RR2241-1FW30	32855.-	1
S0	4 ... 40	24V AC/DC	3RR2242-1FA30	35555.-	1
	4 ... 40	24...240V AC/DC	3RR2242-1FW30	37700.-	1

For ordering terminal bracket for stand alone installation please refer page no. 47

*For ordering current monitoring relay 3RR with spring type terminals, please replace 8th digit from '1' to '2'

Line monitoring relays - 3UG

Phase Sequence	Phase Failure	Phase Imbalance	Under Voltage	Over Voltage	Delay times	Display	Contacts	Line Supply Voltage	Type	Unit LP ₹	Std. pkg. (nos.)
Yes	Yes	10%	-	-	-	-	1 CO	160-690V	3UG4512-1AR20	13815.-	1
Yes	Yes	20%	160-690V	-	Off delay 0.1-20 s	-	2 CO	160-690V	3UG4513-1BR20	18490.-	1
Yes	Yes	Yes	160-690V	160-690V	Off delay 0.1-20 s	Yes	2 CO	160-690V	3UG4615-1CR20	26810.-	1

3UG Monitoring Relays for Electrical and Additional Measurements

Hysteresis	Function	Version of Auxiliary Contacts	Control supply voltage $U_s^{1)}$	Type	Unit LP ₹	Std. pkg. (nos.).
		CO	V AC			
--	Phase Sequence Monitoring 3 Phase	1	360...520	3UG4511-1AP20	13860.-	1
		2		3UG4511-1BP20	15665.-	1
--	Monitoring of phase sequence, phase failure and phase unbalance	2	160...690	3UG4512-1BR20	17740.-	1
Adjustable 1-20V	Digital Monitoring Relay, phase sequence, phase & N conductor failure (90...400 w.r.t. N), overvoltage and undervoltage (Tripping delay 1-20) ²⁾	2 ²⁾	90...400 w.r.t. N	3UG4616-1CR20	31085.-	1
p.f. 0.1 & active current I_{res} 0.1...2.0A	Digital Power factor and active current monitoring (p.f. range 0.1 to 0.99 & & active current I_{res} 0.2-10A) ON-delay 0-99s, OFF-delay 0.1-20s)	2	90...690	3UG4641-1CS20	31085.-	1
0.1...150V	Digital Voltage Monitoring Relay range 17 to 275V AC/DC spikedelay 0.1 to 20 sec	1	Self Powered	3UG4633-1AL30	23775.-	1
0.1...300V	Digital Voltage Monitoring Relay range 10...600V AC/DC, Delay 0.1...20sec	1	24...240V AC/DC	3UG4632-1AW30	25350.-	1
--	#Level Monitoring Relay sensitivity 2KΩ to 200KΩ. Tripping delay 0.1...10sec	1	24...240V AC/DC	3UG4501-1AW30	16890.-	1
--	#Wire electrode for Level Monitoring Relay, 500 MM long, with teflon insulation			3UG3207-3A	24310.-	1

1) Absolute limit values

2) 1 CO Contact each and 1 tripping delay time each for U_{min} and U_{max} .3) LSB: Smallest adjustable value, transformer-dependent, $\leq 1\%$ of $I_{\Delta n}$.

Level monitoring relays must be ordered along with electrodes, for different level controls variety of electrodes are available, for more details refer IC10.

Thermistor motor protection relay - 3RN2

Type of Thermistor	Reset	Contacts	Control Supply voltage	Type	Unit LP ₹	Std. pkg. (nos.)
PTC type A	Auto	1CO	24V-240V AC/DC	3RN2000-1AW30	8550.-	1

Insulation monitoring relay -3UG

Measuring Range U_e kV	Function	Rated control supply voltage U_s V	Type	Unit LP ₹	Std. pkg. (nos.)
1-110	Insulation monitors for ungrounded AC networks	24-240 AC/DC	3UG4581-1AW31	41540.-	1
		0 ... 250 AC	3UG4582-1AW31	36810.-	1
1-110	Insulation monitors for ungrounded DC & AC networks	0 ... 400 AC, 0 ... 600 DC ¹⁾	3UG4583-1CW31	81100.-	1
	Voltage reducer modules	Extending the mains voltage range to max. 690 V AC and 1000 V DC	3UG4983-1AA01	43430.-	1
	Sealable, transparent covers	For 3UG45 81, 3UG45 82	3UG4981-0C	2450.-	1
		For 3UG45 83	3UG4983-0C	2500.-	1

1) With 3UG4983-1AA01 voltage reducer module suitable also for the insulation monitoring of IT networks up to 690 V AC and 1000 V DC.

Timing and Monitoring Relays



Features and Benefits

- Two sizes for the entire range 17.5mm & 35mm width
- The entire range is suitable for DIN rail mounting
- Variant with digital display
- Auto / Manual reset



for more info
scan QR code



Relay	MLFB	Neutral loss protection	Phase failure protection	Imbalance protection	Phase reversal protection	Under voltage protection	Over voltage protection	Under freq protection	Over freq protection	Other parameters
Line monitoring relay	7UG0 712		✓	✓	✓					
	7UG0 814	✓	✓	✓	✓	✓	✓	✓	✓	
	7UG0 818		✓	✓	✓	✓	✓	✓	✓	
Voltage Monitoring relay	7UG0 753		✓		✓	✓	✓			
Current Monitoring relay	7UG0 82		✓	✓						Under-current and over-current protection
	7UG0 83		✓	✓						Under-current and over-current protection
Earth leakage relay	7UG0 84									Earth leakage protection
Earth fault monitoring relay	7UG0 86									Earth fault protection
Temperature controller (TC)	7UG0 48									Monitors temperature, input sensor TC/RTD
Water level controller relay	7UG08 85									Monitors and controls liquid level (conductive)
Thermistor protection relay	7UG08 81									Sensor input: Positive coefficient thermistor (PTC)
Speed monitoring relay	7UG05 83									Over/under speed protection

7UG0 monitoring relays

Description			Type	Unit LP ₹	Std. pkg. (nos.)
Line monitoring relay	Self powered	3Ph-3W	7UG0712-1AA20	1575.-	1
	Self powered	1Ph-2W, 3Ph-3W, 3Ph-4W	7UG0814-1CA20	3690.-	1
	Self powered	3Ph-3W, 3Ph-4W	7UG0818-1CA20	3385.-	1
Voltage Monitoring relay	Self powered	3Ph-3W	7UG0753-1AA20	2690.-	1
Current Monitoring relay	110 V AC	1Ph-2W	7UG0821-1AB20	4370.-	1
	230 V AC	1Ph-2W	7UG0822-1AD20	4165.-	1
	110 V AC	1Ph-2W, 3Ph-3W, 3Ph-4W	7UG0831-1AB20	5320.-	1
	230 V AC	1Ph-2W, 3Ph-3W, 3Ph-4W	7UG0832-1AD20	5065.-	1
	110 V AC	1Ph-2W, 3Ph-3W, 3Ph-4W	7UG0841-1CB20	5615.-	1
Earth leakage relay	230 V AC	1Ph-2W, 3Ph-3W, 3Ph-4W	7UG0842-1CD20	5670.-	1
		35mm	7UG09-96	2045.-	1
		70mm	7UG09-97	2335.-	1
		120mm	7UG09-99	3975.-	1
		210mm	7UG0 994*	7650.-	1
CBCT for ELR		310mm	7UG0 995*	11400.-	1
Earth Fault monitoring relay	1 Ph-2W, 3Ph-3W, 3Ph-4W		7UG0861-1BU20	5805.-	1
CBCT for EFR: 160 frame	Core Balance CT 160 frame, 3P		7UG09910	2005.-	1
	Core Balance CT 160 frame, 4P		7UG09911	2285.-	1
CBCT for EFR: 250 frame	Core Balance CT 250 frame, 3P		7UG09912	2420.-	1
	Core Balance CT 250 frame, 4P		7UG09913	2850.-	1
CBCT for EFR: 630 frame	Core Balance CT 630 frame, 3P		7UG09914	3565.-	1
	Core Balance CT 630 frame, 4P		7UG09915	3855.-	1
Automatic Power factor correction relay (APFC relay)	8 Stage with LCD display		7UG0571-1FT20	22235.-	1
	12 Stage with LCD display		7UG0572-1GT20	23815.-	1
	12 stage with LED display		7UG0572-1GT21	13620.-	1
Temperature controlling relay	PID/ON-OFF Control suitable for PTC/RTD inputs CO + SSR output		7UG0 480-1IU20	4255.-	1
Water level controller relay	110-240V AC/DC	Single tank (suction or filling) or dual tank (suction and filling) monitoring	7UG0885-1JU20	Refer page no. 68	1
Sensor for water level controller relay	Pack of 3 sensor		7UG0985-0YY00		1
Thermistor protection relay	110-240V AC/DC		7UG0881-1BU20		1
Speed monitoring relay	110-240V AC/DC		7UG0583-1CU20	7715.-	1

7PV0 timers

Description			Type	Unit LP ₹	Std. pkg. (nos.)
ON delay timer	230V AC		7PV0712-1AD20	1560.-	1
Multifunction timer with digital display	20-240V AC/DC	15 functions	7PV0732-1AV20	3055.-	1
Multifunction timer - analog	20-240V AC / 12--240V DC	10 functions	7PV0723-1AZ20	2045.-	1

Note: * Non RoHS and CE

Plug-in-relay - 7RQ

Now in
TI - GREY

NEW

CE RoHS
Compliant

Features and Benefits

- LED status indicator as a standard feature - allows personnel to see the relay status in dark conditions
- Mechanical indicators - allow personnel to see relay status under normal light or bright conditions
- Easy grip cover - adds to the ease of removing the relay from the socket
- Removable I.D. (identification) label- allows for easy identification
- Wide operating voltage range
- DIN rail / PCB mounting – Quick & Easy Installation



Relay	Standard Features	Control supply voltage* (V)	Type	Unit LP ₹	Std. pkg. (nos.)
1CO					
	6A 5 pin	DC	24	7RQ0100-0AC00	330.- 10
			48	7RQ0100-0AD00	440.- 10
			110	7RQ0100-0AE00	600.- 10
	• Mechanical Flag • LED indicator	AC	24	7RQ0100-0AM10	420.- 10
			48	7RQ0100-0AN10	600.- 10
			110	7RQ0100-0AP10	625.- 10
			230	7RQ0100-0AR10	640.- 10
2CO					
	6A 8 pin	DC	24	7RQ0100-0BC00	460.- 10
			48	7RQ0100-0BD00	550.- 10
			110	7RQ0100-0BE00	590.- 10
	• Mechanical Flag • LED indicator	AC	24	7RQ0100-0BM10	535.- 10
			48	7RQ0100-0BN10	590.- 10
			110	7RQ0100-0BP10	605.- 10
			230	7RQ0100-0BR10	615.- 10
2CO					
	10A 8 pin	DC	24	7RQ0110-0BC00	590.- 10
			48	7RQ0110-0BD00	725.- 10
			110	7RQ0110-0BE00	780.- 10
	• LED indicator	AC	24	7RQ0110-0BM00	705.- 10
			48	7RQ0110-0BN00	795.- 10
			110	7RQ0110-0BP00	780.- 10
			230	7RQ0110-0BR00	815.- 10
3CO					
	10A 11 pin	DC	24	7RQ0100-0CC00	755.- 10
			48	7RQ0100-0CD00	795.- 10
			110	7RQ0100-0CE00	920.- 10
	• LED indicator	AC	24	7RQ0100-0CM00	805.- 10
			48	7RQ0100-0CN00	845.- 10
			110	7RQ0100-0CP00	905.- 10
			230	7RQ0100-0CR00	920.- 10
4CO					
	5A 14 pin	DC	24	7RQ0100-0DC00	695.- 10
			48	7RQ0100-0DD00	730.- 10
			110	7RQ0100-0DE00	825.- 10
	• LED indicator	AC	24	7RQ0100-0DM00	725.- 10
			48	7RQ0100-0DN00	740.- 10
			110	7RQ0100-0DP00	805.- 10
			230	7RQ0100-0DR00	815.- 10

* Control supply voltage available upon request: DC: 6V, 12 & AC: 6V, 12V, 115V

Socket	Standard Features	Type	Unit LP ₹	Std. pkg. (nos.)
1CO				
10A	PCB mounted	7RQ0202-1AX00	110.-	10
				
	Din rail mounting	7RQ0201-1AX00	200.-	10
				
2CO				
6A	PCB mounted	7RQ0202-1BX00	110.-	10
				
	Din rail mounting	7RQ0201-1BX00	260.-	10
				
2CO				
10A	PCB mounted	7RQ0212-1BX00	135.-	10
				
	Din rail mounting	7RQ0211-1BX00	335.-	10
				
3CO				
10A	Din rail mounting	7RQ0201-1CX00	460.-	10
				
4CO				
7A	PCB mounted	7RQ0202-1DX00	180.-	10
				
	Din rail mounting	7RQ0201-1DX00	320.-	10
				



SIRIUS ACT


Performance in action

www.siemens.com/SIRIUS-Act

SIEMENS


An overview of the variety

Body design lines and button colors




SIRIUS ACT products with standard IP69k.

IP69k is the highest achievable rating and guarantees totally protection against dust, as well as high pressure, high temperature jets of water from multiple directions.




Black plastic,
22 mm Ø




Shiny metal,
22 mm Ø




Push buttons

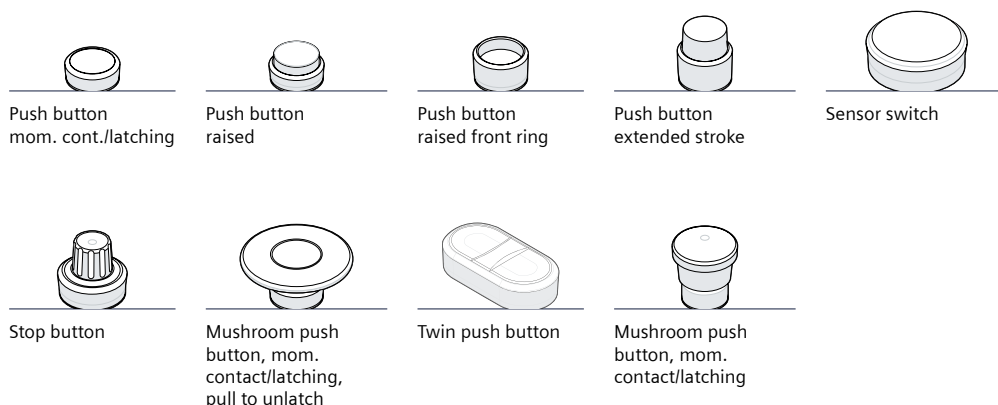


Emergency stop

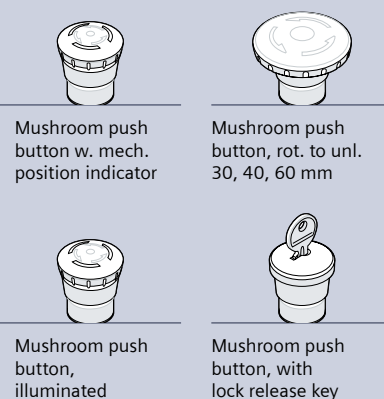


Selector switches

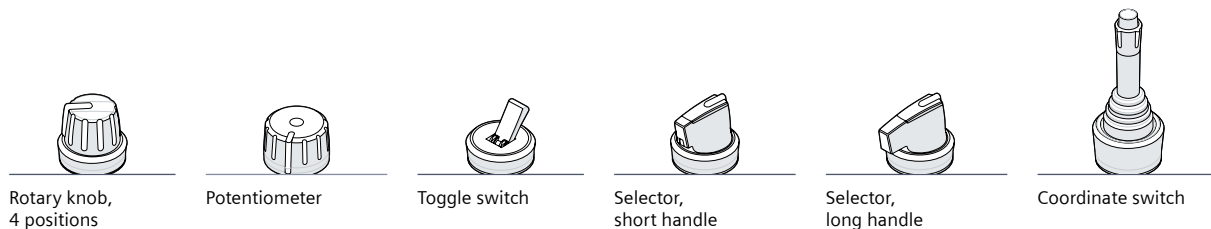


Key-operated switches

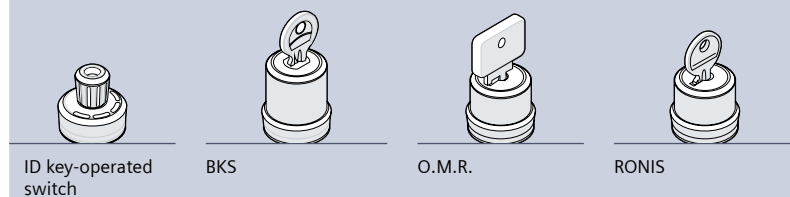


Indicators

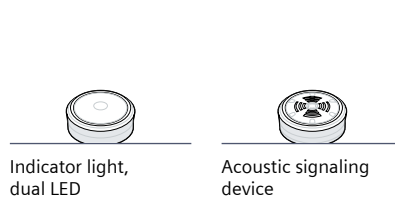

Accessories

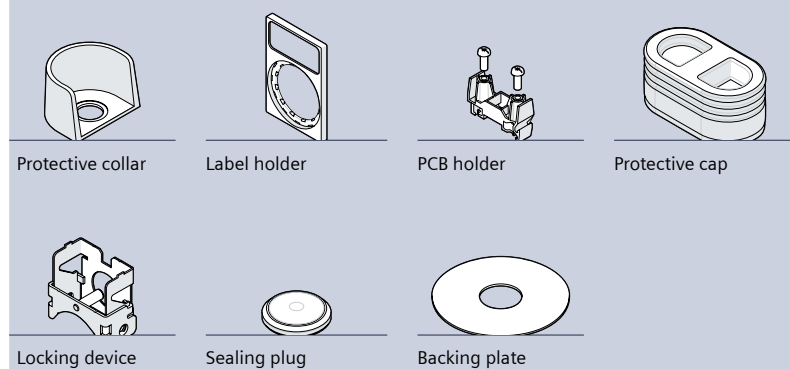

Enclosures

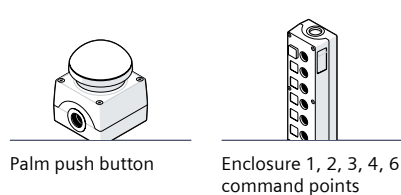

A small selection of high demand models

NEW

Description	Plastic			Metal			Colour	
		Type	Unit LP ₹		Type	Unit LP ₹		
Pushbutton, 22 mm, round, flat momentary contact type		3SU1000-0AB_0-0AA0 ↑ Colour	830.-		3SU1050-0AB_0-0AA0 ↑ Colour	1075.-	1 ● Black 2 ● Red 3 ● Yellow 4 ● Green 5 ● Blue 6 ○ White 7 ○ Clear 8 ○ Gray	
Illuminated pushbutton, 22 mm, round, flat momentary contact type		3SU1001-0AB_0-0AA0 ↑ Colour	1155.-		3SU1051-0AB_0-0AA0 ↑ Colour	1305.-	0 ● Amber 2 ● Red 3 ● Yellow 4 ● Green 5 ● Blue 6 ○ White 7 ○ Clear	
Selector switch, 2 Position, illuminable, 22 mm, round, plastic, O-I, latching, actuating angle 90°, 10:30h/13:30h		3SU1002-2BF_0-0AA0 ↑ Colour	1800.-		3SU1052-2BF_0-0AA0 ↑ Colour	2005.-	1 ● Black 2 ● Red 3 ● Yellow 4 ● Green 5 ● Blue 6 ○ White	
Selector switch, 3 position, illuminable, 22 mm, round switch positions I-O-II, latching, actuating angle 2x45°, 10:30h/12h/13:30h		3SU1002-2BL_0-0AA0 ↑ Colour	1800.-		3SU1052-2BL_0-0AA0 ↑ Colour	2005.-	1 ● Black 2 ● Red 3 ● Yellow 4 ● Green 5 ● Blue 6 ○ White	
RONIS key-operated switch, 2 switch positions O-I, latching, actuating angle 90°		3SU1000-4BF01-0AA0	4390.-		3SU1050-4BF01-0AA0	4770.-		
RONIS key-operated switch, 3 switch positions I-O-II, latching, actuating angle 2x45°		3SU1000-4BL01-0AA0	4635.-		3SU1050-4BL01-0AA0	5030.-		
EMERGENCY STOP mushroom pushbutton, 22 mm, round, red, 40 mm, positive latching, rotate-to-unlatch		3SU1000-1HB20-0AA0	3495.-		3SU1050-1HB20-0AA0	3835.-		
EMERGENCY STOP mushroom pushbutton, illuminable, 22 mm, round, red, 40 mm, positive latching, rotate-to-unlatch		3SU1001-1HB20-0AA0	3660.-		3SU1051-1HB20-0AA0	4260.-		
Twin pushbutton, 22 mm, round, green: I, red: O, pushbuttons, flat and raised		3SU1000-3BB42-0AK0	1870.-		3SU1050-3BB42-0AK0	2270.-		
Indicator lights, 22 mm, round, lens, smooth		3SU1001-6AA_0-0AA0 ↑ Colour	680.-		3SU1051-6AA_0-0AA0 ↑ Colour	785.-	0 ● Amber 2 ● Red 3 ● Yellow 4 ● Green 5 ● Blue 6 ○ White 7 ○ Clear	



Description		Type	Unit LP ₹		Type	Unit LP ₹	
Holder to be selected along with individual Actuating and Signaling Elements		Plastic Holder 3SU1500-0AA10-0AA0*	370.-		Universal Holder - Suitable for Plastic and Metal 3SU1550-0AA10-0AA0*	405.-	

Description		Type	Unit LP ₹
Contact Modules		3SU1400-1AA10-1BA0*	840.-
		3SU1400-1AA10-1CA0*	840.-
		3SU1400-1AA10-1FA0	1405.-
		3SU1400-1AA10-1DA0	1940.-
		3SU1400-1AA10-1EA0	1940.-

* MOQ - 5

Description		Type	Unit LP ₹	Colour
LED Modules		24V AC/DC	3SU1401-1BB_0-1AA0 *	1305.-
		110V AC	3SU1401-1BC_0-1AA0	2315.-
		230V AC	3SU1401-1BF_0-1AA0	2315.-
		6 ... 24 V AC/DC	3SU1401-1BG_0-1AA0	1575.-
		24 ... 240V AC/DC	3SU1401-1BH_0-1AA0 ↑ Colour	2795.-
				5 ● Blue ○ White



SIRIUS ACT

Innovative Technology...
Simple Installations...

NEW

SIRIUS ACT with PROFINET

SIRIUS ACT with PROFINET connects pushbuttons and indicator lights directly via PROFINET to the controller and HMI devices – including with safety functions

Description		Type	Unit LP ₹						
Push Button and Signaling Devices									
Multiple version available		3SU10_--_--_--_--_--	Refer Page no. 75						
Holder to be selected along with individual Actuating and Signaling Elements	Plastic	3SU1500-0AA10-0AA0	370.-						
	Universal	3SU1550-0AA10-0AA0	405.-						
Profinet Interface Modules									
Standard IM, 24 V DC 1 ... 20 terminal modules can be connected		3SU1400-1LK10-1AA1	41600.-						
Fail Safe IM F, 24 V DC 1 ... 20 terminal modules can be connected		3SU1400-1LL10-1BA1	64955.-						
Profinet Terminal Modules									
				2 Contacts	2 Contacts with LED	LED	Colour		
With 2 contacts	3SU1400-1MA10-1BA1		6360.-				0		Amber
With 2 contacts and integrated LED	3SU1401-1MC_0-1CA1 ↑ Colour		6655.-				2		Red
							3		Yellow
							4		Green
With integrated LED	3SU1401-1ME_0-1DA1 ↑ Colour		6155.-				5		Blue
				6				White	
Accessories									
Flat Ribbon Cable, 7-core		3SU1900-0KQ80-0AA0	920.-						

Modern Access Management

ID Key Operated Switches - Groups of employees or individuals can be authenticated by means of the ID key-operated switch. Color-coded keys for easy distinction between users.

Description			Type	Unit LP ₹	Description			Type	Unit LP ₹
ID Key operated switches					Electronic Modules				
ID key-operated switches Number of switching positions: 4 Switch position for key removal: Key removal possible in all 4 positions		Plastic, black	3SU1000-4WS10-0AA0	9430.-	Electronic modules for ID key-operated switches		3SU1400-1GC10-1AA0	27245.-	
Holder Holder needs to be selected along with individual Actuating and Signaling Elements	Plastic		3SU1500-0AA10-0AA0	370.-	ID Keys				
					Green: ID Group 1		3SU1900-0FV40-0AA0	1765.-	
					Yellow: ID Group 2		3SU1900-0FW30-0AA0		
					Red: ID Group 3		3SU1900-0FX20-0AA0		
					Blue: ID Group 4		3SU1900-0FY50-0AA0		

8WN - 70mm Modular unit IP 65

Continuous light

Type	Color	Voltage	Unit LP* ₹	Std. pkg. (nos.)
8WN4420-5AB00	Red	24 V AC/DC	3460.-	1
8WN4420-5AC00	Green			1
8WN4420-5AD00	Yellow			1
8WN4420-5AE00	White			1
8WN4420-5AF00	Blue			1
8WN4440-5AB00	Red	110 V AC/DC	3195.-	1
8WN4440-5AC00	Green			1
8WN4440-5AD00	Yellow			1
8WN4440-5AE00	White			1
8WN4440-5AF00	Blue			1
8WN4450-5AB00	Red	220 V AC	3195.-	1
8WN4450-5AC00	Green			1
8WN4450-5AD00	Yellow			1
8WN4450-5AE00	White			1
8WN4450-5AF00	Blue			1

Blinking light

Type	Color	Voltage	Unit LP* ₹	Std. pkg. (nos.)
8WN4420-5BB00	Red	24 V AC/DC	3750.-	1
8WN4420-5BC00	Green			1
8WN4420-5BD00	Yellow			1
8WN4420-5BE00	White			1
8WN4420-5BF00	Blue			1
8WN4440-5BB00	Red	110 V AC/DC	3750.-	1
8WN4440-5BC00	Green			1
8WN4440-5BD00	Yellow			1
8WN4440-5BE00	White			1
8WN4440-5BF00	Blue			1
8WN4450-5BB00	Red	220 V AC	3750.-	1
8WN4450-5BC00	Green			1
8WN4450-5BD00	Yellow			1
8WN4450-5BE00	White			1
8WN4450-5BF00	Blue			1



Accessories for 70mm LED modular unit

Type	Description	Unit LP* ₹	Std. pkg. (nos.)
8WN4408-0AF00	Connection components, Screw terminals	1065.-	1
8WN4408-0AG00	Caps for light elements	110.-	1
8WN4408-0DH00	Feet with pipes, single; Length 60mm	180.-	1
8WN4408-0DJ00	Feet with pipes, single; Length 80mm	225.-	1
8WN4408-0DA00	Feet with pipes, single; Length 110mm	250.-	1
8WN4408-0CC00	Brackets for side mounting, use together with foot with pipe	225.-	1

Type	Description	Unit LP* ₹	Std. pkg. (nos.)
8WN4408-0CF00	Brackets for side mounting,	845.-	1
8WN4408-0CG00	Fold-out support	405.-	1
8WN4420-0GA00	24 V AC/DC, continuous buzzer	2495.-	1
8WN4420-0HA00	24 V AC/DC, discontinuous buzzer	2915.-	1
8WN4440-0GA00	110 V AC/DC, continuous buzzer	2495.-	1
8WN4440-0HA00	110 V AC/DC, discontinuous buzzer	2915.-	1
8WN4450-0GA00	220 V AC, continuous buzzer	2495.-	1
8WN4450-0HA00	220 V AC, discontinuous buzzer	2915.-	1

8WN - 50mm Preassembled unit IP 20

Continuous light without buzzer

Type	Color	Voltage	Unit LP* ₹	Std. pkg. (nos.)
8WN2221-6AB00	R	24V AC/DC	3195.-	1
8WN2222-6AG00	R, G		4605.-	1
8WN2223-6AJ00	R, Y, G		5980.-	1
8WN2241-6AB00	R	110 V AC/DC	3195.-	1
8WN2242-6AG00	R, G		4605.-	1
8WN2243-6AJ00	R, Y, G		5980.-	1
8WN2251-6AB00	R	220 V AC	3195.-	1
8WN2252-6AG00	R, G		4605.-	1
8WN2253-6AJ00	R, Y, G		5980.-	1

Continuous light with continuous buzzer

Type	Color	Voltage	Unit LP* ₹	Std. pkg. (nos.)
8WN2222-6JB00	R	24V AC/DC	3750.-	1
8WN2223-6JG00	R, G		5150.-	1
8WN2224-6JJ00	R, Y, G		6535.-	1
8WN2242-6JB00	R	110 V AC/DC	3750.-	1
8WN2243-6JG00	R, G		5150.-	1
8WN2244-6JJ00	R, Y, G		6535.-	1
8WN2252-6JB00	R	220 V AC	3750.-	1
8WN2253-6JG00	R, G		5150.-	1
8WN2254-6JJ00	R, Y, G		6535.-	1

Blinking light without buzzer

Type	Color	Voltage	Unit LP* ₹	Std. pkg. (nos.)
8WN2221-6BB00	R	24V AC/DC	3750.-	1
8WN2222-6BG00	R, G		5150.-	1
8WN2223-6BJ00	R, Y, G		6535.-	1

Blinking light with continuous buzzer

Type	Color	Voltage	Unit LP* ₹	Std. pkg. (nos.)
8WN2222-6MB00	R	24V AC/DC	4170.-	1
8WN2223-6MG00	R, G		5555.-	1
8WN2224-6MJ00	R, Y, G		6945.-	1

Continuous light with discontinuous buzzer

Type	Color	Voltage	Unit LP* ₹	Std. pkg. (nos.)
8WN2222-6KB00	R	24V AC/DC	4170.-	1
8WN2223-6KG00	R, G		5555.-	1
8WN2224-6KJ00	R, Y, G		6945.-	1
8WN2242-6KB00	R	110 V AC/DC	4170.-	1
8WN2243-6KG00	R, G		5555.-	1
8WN2244-6KJ00	R, Y, G		6945.-	1
8WN2252-6KB00	R	220 V AC	4170.-	1
8WN2253-6KG00	R, G		5555.-	1
8WN2254-6KJ00	R, Y, G		6945.-	1

Blinking light with discontinuous buzzer

Type	Color	Voltage	Unit LP* ₹	Std. pkg. (nos.)
8WN2222-6NB00	R	24V AC/DC	4605.-	1
8WN2223-6NG00	R, G		5980.-	1
8WN2224-6NJ00	R, Y, G		7360.-	1



Indicating Lamps 3SB5

Compact LED indicating lamps

	Voltage	Colour	Type	Unit LP ₹	Std Pkg (nos.)
	24 V AC/DC 50/60 Hz	Red	3SB5285-6HC01	350.-	10
		Green	3SB5285-6HE01		10
		Amber	3SB5285-6HL01		10
		Blue	3SB5285-6HF01		10
		White	3SB5285-6HG01	350.-	10
		Yellow	3SB5285-6HD01		10
		Clear	3SB5285-6HH01		10
	30V DC ®	Red	3SB5285-6HC13	390.-	10
		Green	3SB5285-6HE13		10
		Amber	3SB5285-6HL13		10
		Blue	3SB5285-6HF13		10
		White	3SB5285-6HG13	390.-	10
		Yellow	3SB5285-6HD13		10
		Clear	3SB5285-6HH13		10
	110 V AC 50/60 Hz	Red	3SB5285-6HC02	350.-	10
		Green	3SB5285-6HE02		10
		Amber	3SB5285-6HL02		10
		Blue	3SB5285-6HF02		10
		White	3SB5285-6HG02	350.-	10
		Yellow	3SB5285-6HD02		10
		Clear	3SB5285-6HH02		10
	110 V DC®	Red	3SB5285-6HC04	1010.-	10
		Green	3SB5285-6HE04		10
		Amber	3SB5285-6HL04		10
		Blue	3SB5285-6HF04		10
		White	3SB5285-6HG04	390.-	10
		Yellow	3SB5285-6HD04		10
		Clear	3SB5285-6HH04		10
	220/240 V AC 50/60 Hz	Red	3SB5285-6HC03	350.-	10
		Green	3SB5285-6HE03		10
		Amber	3SB5285-6HL03		10
		Blue	3SB5285-6HF03		10
		White	3SB5285-6HG03	350.-	10
		Yellow	3SB5285-6HD03		10
		Clear	3SB5285-6HH03		10
	220 V DC®	Red	3SB5285-6HC05	390.-	10
		Green	3SB5285-6HE05		10
		Amber	3SB5285-6HL05		10
		Blue	3SB5285-6HF05		10
		White	3SB5285-6HG05	390.-	10
		Yellow	3SB5285-6HD05		10
		Clear	3SB5285-6HH05		10

Now also available in 415V - Prices on request

Wide band compact LED indicating lamps

	Voltage	Colour	Type	Unit LP ₹	Std Pkg (nos.)
	24 to 240 V AC & 24 to 220 V DC NEW	Red	3SB5235-6HC14	590.-	10
		Green	3SB5235-6HE14		10
		Amber	3SB5235-6HL14		10
		Blue	3SB5235-6HF14		10
		White	3SB5235-6HG14	590.-	10
		Yellow	3SB5235-6HD14		10
		Clear	3SB5235-6HH14	775.-	10

Modular Indicating Lamps (with plastic front ring) Lens Assembly

	Colour	Type	Unit LP ₹	Std Pkg (nos.)
	Red	3SB5201-6BC00	115.-	10
	Green	3SB5201-6BE00		10
	Amber	3SB5201-6BL00		10
	Blue	3SB5201-6BF00		10
	White	3SB5201-6BG00		10
	Yellow	3SB5201-6BD00		10
	Clear	3SB5201-6BH00		10

Illumination Module [§] - (suitable for INTEGRATED LED lamp)

	Voltage	Colour	Type	Unit LP ₹	Std Pkg (nos.)
	24 V AC/DC 50/60 Hz	Red	3SB5400-7CC	300.-	10
		Green	3SB5400-7CE	300.-	10
		Amber	3SB5400-7CL	300.-	10
		Blue	3SB5400-7CF	950.-	10
		White†	3SB5400-7CG	300.-	10
		Yellow	3SB5400-7CD	300.-	10
		Red	3SB5400-7EC	300.-	10
		Green	3SB5400-7EE	300.-	10
	110 V AC 50/60 Hz	Amber	3SB5400-7EL	300.-	10
		Blue	3SB5400-7EF	950.-	10
		White†	3SB5400-7EG	300.-	10
		Yellow	3SB5400-7ED	300.-	10
		Red	3SB5400-7DC	300.-	10
		Green	3SB5400-7DE	300.-	10
		Amber	3SB5400-7DL	300.-	10
		Blue	3SB5400-7DF	950.-	10
	110 V DC®	White†	3SB5400-7DG	300.-	10
		Yellow	3SB5400-7DD	300.-	10
		Red	3SB5400-7TC	300.-	10
		Green	3SB5400-7TE	300.-	10
		Amber	3SB5400-7TL	300.-	10
		Blue	3SB5400-7TF	950.-	10
		White†	3SB5400-7TG	300.-	10
		Yellow	3SB5400-7TD	300.-	10
	230 V AC 50/60 Hz	Red	3SB5400-7HC	300.-	10
		Green	3SB5400-7HE	300.-	10
		Amber	3SB5400-7HL	300.-	10
		Blue	3SB5400-7HF	950.-	10
		White†	3SB5400-7HG	300.-	10
		Yellow	3SB5400-7HD	300.-	10
	220 V DC®	Red	3SB5400-7HC	300.-	10
		Green	3SB5400-7HE	300.-	10
		Amber	3SB5400-7HL	300.-	10
		Blue	3SB5400-7HF	950.-	10
		White†	3SB5400-7HG	300.-	10
		Yellow	3SB5400-7HD	300.-	10



@ Use of bridge rectified DC source (filtered O/P) recommended

† Can be used with clear lens.

§ Illumination module can be used with lens assembly, illuminated push buttons & illuminated selector actuators.

■ Stock items

Push buttons

Modular Push button actuators (with plastic front ring)

Description	Colour	Type	Unit LP ₹	Std Pkg (nos.)
Opaque actuator (with holder for contact block)				
	Normal	Red ■ 3SB5000-0AC01	105.-	10
		Green ■ 3SB5000-0AE01		
		Blue ■ 3SB5000-0AF01		
		White ■ 3SB5000-0AG01		
		Yellow ■ 3SB5000-0AD01		
	Raised	Black ■ 3SB5000-0AB01	115.-	10
		Red ■ 3SB5000-0LC01		
		Green ■ 3SB5000-0LE01		
		Blue ■ 3SB5000-0LF01		
		White ■ 3SB5000-0LG01		
	Normal	Yellow ■ 3SB5000-0LD01	135.-	10
		Black ■ 3SB5000-0LB01		
		Red ■ 3SB5001-0AC01-0PQ0		
		Green ■ 3SB5001-0AE01-0PQ0		
		Amber ■ 3SB5001-0AL01-0PQ0		
	Raised	Blue ■ 3SB5001-0AF01-0PQ0	140.-	10
		White ■ 3SB5001-0AG01-0PQ0		
		Yellow ■ 3SB5001-0AD01-0PQ0		
		Clear ■ 3SB5001-0AH01-0PQ0		
		Red ■ 3SB5218-0LC01-0PQ0		
		Green ■ 3SB5218-0LE01-0PQ0		
		Amber ■ 3SB5218-0LL01-0PQ0		
		Blue ■ 3SB5218-0LF01-0PQ0		
		White ■ 3SB5218-0LG01-0PQ0		
		Yellow ■ 3SB5218-0LD01-0PQ0		
		Clear ■ 3SB5218-0LH01-0PQ0		

Modular Selector Actuators (with plastic front ring)

Description	Colour	Type	Unit LP ₹	Std Pkg (nos.)	
2 position opaque selector actuator (with holder for contact block)					
	Maintained	Black	■ 3SB5000-2AB01	345.-	10
		Red	■ 3SB5000-2AC01		
	Momentary	Black	■ 3SB5000-2BB01		
		Red	■ 3SB5000-2BC01		
3 position opaque selector actuator (with holder for contact block)					
	Maintained	Black	■ 3SB5000-2DB01	350.-	10
		Red	■ 3SB5000-2DC01		
	Momentary	Black	■ 3SB5000-2EB01		
		Red	■ 3SB5000-2EC01		
2 position illuminated selector actuator (with holder for contact block)					
	Maintained	Red	■ 3SB5001-2AC01	340.-	10
		Green	■ 3SB5001-2AE01		
		Blue	■ 3SB5001-2AF01		
		Yellow	■ 3SB5001-2AD01		
		Clear	■ 3SB5001-2AH01		
	Momentary	Red	■ 3SB5001-2BC01		
		Green	■ 3SB5001-2BE01		
		Blue	■ 3SB5001-2BF01		
	Yellow	■ 3SB5001-2BD01			
	Clear	■ 3SB5001-2BH01			
	3 position illuminated selector actuator (with holder for contact block)				
		Maintained	Red	■ 3SB5001-2DC01	355.-
Green			■ 3SB5001-2DE01		
Blue			■ 3SB5001-2DF01		
Yellow			■ 3SB5001-2DD01		
Clear			■ 3SB5001-2DH01		
Momentary		Red	■ 3SB5001-2EC01		
		Green	■ 3SB5001-2EE01		
		Blue	■ 3SB5001-2EF01		
	Yellow	■ 3SB5001-2ED01			
	Clear	■ 3SB5001-2EH01			

Contact Blocks for Push button, Selector & Key Actuators

Description	Configuration	Type	Unit LP ₹	Std Pkg (nos.)
Contact blocks for rear mounting (for panel mounting)				
	1 NO	■ 3SB5400-0B	125.-	10
	1NC	■ 3SB5400-0C		10
	1NO + 1 NC	■ 3SB5400-0A		10
	2 NO	■ 3SB5400-0E	230.-	10
	2 NC	■ 3SB5400-0F		10

Mushroom Actuators (with plastic front ring)

Description	Colour	Type	Unit LP ₹	Std Pkg (nos.)
Mushroom actuator (40 mm ø) (with holder for contact block)				
momentary	Black	3SB5000-1NB01	205.-	10
	Red	■ 3SB5000-1NC01		
push to trip, turn to release	Black	■ 3SB5000-1CB01	240.-	10

Mushroom Actuators (with plastic front ring) for Emergency Stop Specifications

NEW Description	Colour	Type	Unit LP ₹	Std Pkg (nos.)
Enhanced Safety and Monitoring with MNCB				
Mushroom Actuator, E-Stop (40mm) with MNCB (1NC)	Red	3SB5204-0UC01	435.-	10
MNCB (Mounting Monitoring Contact Block, 1NC)		3SB5400-0M	205.-	10

MNCB should be assembled only on middle slot "5-6" of the holder

Description	Colour	Type	Unit LP ₹	Std Pkg (nos.)
Mushroom actuator (40 mm ø) push to trip, turn to release with 1NC	Red	■ 3SB5203-0UC01	400.-	10
Mushroom actuator (40 mm ø) push to trip, turn to release	Red	3SB5000-0UC01	285.-	10
Mushroom actuator (40 mm ø) push to trip, key to release	Red	3SB5000-0TC01	1510.-	10

Modular key actuators (with plastic front ring)

Description	Colour	Type	Unit LP ₹	Std Pkg (nos.)
2 position key actuator (with holder for contact block)	Maintained	 ■ 3SB5000-4AC01	540.-	10
		 3SB5000-4AA01		10
		 3SB5000-4AB01		10
	Momentary	 ■ 3SB5000-4TA01		10
		 3SB5000-4TC01		10
		 3SB5000-4HA01		10
3 position key actuator (with holder for contact block)	Maintained	 3SB5000-4HC01	590.-	10
		 3SB5000-4HB01		10
		 3SB5000-4JA01		10
	Momentary	 3SB5000-4HA01		10
		 3SB5000-4HC01		10
		 3SB5000-4HB01		10

* Key removable position

L - Left, R - Right, C - Centre, KL - Key at Left, KR - Key at Right, KC - Key at Centre

Twin Push Button Actuators

Description		Type	Unit LP ₹	Std Pkg (nos.)
	Complete actuator with holder for contact block			
	Opaque with 1NO & 1NC	3SB5201-7EC01	430.-	10
	Illuminated with 1NO & 1NC	3SB5234-7EC01		10
	Modular actuator with holder for contact block			
	Opaque	3SB5000-7EC01	210.-	10
	Illuminated	3SB5001-7EC01		10

■ Stock items

Push button Stations

No. of control points	Description	Type	Unit LP ₹	Std Pkg (nos.)
Metal enclosure: Aluminum Die Cast				
1	Normal opaque push button - Green with 1NO contact block, "START"	■ 3SB5801-8AA3	1425.-	1
1	Red mushroom momentary actuator, with 1NC contact block, "STOP"	■ 3SB5801-8AN3	1535.-	1
1	Red maintained mushroom actuator, turn to release, with 1NC contact block, "E-STOP"	■ 3SB5801-8AM3	2025.-	1
2	Normal opaque push button - Green with 1NO contact block, "START" + Normal opaque push button - Red with 1NC contact block, "STOP"	■ 3SB5802-8AC3	1765.-	1
2	Normal opaque push button - Green with 1NO contact block, "START" + Red mushroom-maintained with 1NC contact block, "STOP"	■ 3SB5802-8AE3	2240.-	1
3	Normal opaque push button - Green with 1NO contact block, "START" + Normal opaque push button - Red with 1NC contact block, "STOP" + Normal opaque push button - Black with 1NO contact block, "REVERSE"	■ 3SB5803-8AH3	2510.-	1
Pendant mounting: Aluminum Die Cast				
2	Normal opaque push button - Green with 1NO contact block, "START" + Normal opaque push button - Red with 1NC contact block, "STOP"	3SB5822-8AC3	2405.-	1
3	Normal opaque push button - Green with 1NO contact block, "START" + Normal opaque push button - Red with 1NC contact block, "STOP" + Normal opaque push button - Black with 1NO contact block, "REVERSE"	3SB5823-8AH3	3130.-	1
Plastic Enclosure				
1	Normal opaque push button - Green with 1NO contact block, "START"	3SB5801-7AA3	815.-	1
1	Red mushroom momentary actuator, with 1NC contact block, "STOP"	3SB5801-7AN3	815.-	1
1	Red maintained mushroom actuator, turn to release, with 1NC contact block, "E-STOP"	3SB5801-7AM3	890.-	1
2	Normal opaque push button - Green with 1NO contact block, "START" + Normal opaque push button - Red with 1NC contact block, "STOP"	3SB5802-7AC3	960.-	1
2	Normal opaque push button - Green with 1NO contact block, "START" + Red mushroom-maintained with 1NC contact block, "STOP"	3SB5802-7AE3	1100.-	1
3	Normal opaque push button - Green with 1NO contact block, "START" + Normal opaque push button - Red with 1NC contact block, "STOP" + Normal opaque push button - Black with 1NO contact block, "REVERSE"	3SB5804-7AG3	1220.-	1
Pendant mounting: Plastic				
1	Normal opaque push button - Green with 1NO contact block, "START"	3SB5821-7AA3	1760.-	1
2	Normal opaque push button - Green with 1NO contact block, "START" + Normal opaque push button - Red with 1NC contact block, "STOP"	3SB5822-7AC3	2150.-	1
3	Normal opaque push button - Green with 1NO contact block, "FORWARD" + Normal opaque push button - Red with 1NC contact block, "STOP" + Normal opaque push button - Black with 1NO contact block, "REVERSE"	3SB5823-7AH3	2820.-	1



Accessories for push button stations

Description	Type	Unit LP ₹	Std Pkg (nos.)
Plastic Enclosures			
1 way, Grey	3SB5801-0AC3	595.-	1
2 way, Grey	3SB5802-0AC3	505.-	1
3 way, Grey	3SB5803-0AC3	520.-	1
4 way, Grey	3SB5804-0AC3	1135.-	1
6 way, Grey	3SB5806-0AC3	1580.-	1
1 way, Yellow	3SB5801-0AD3	595.-	1
Metal Enclosures			
1 way	3SB5801-4AC3	1205.-	1
2 way	3SB5802-4AC3	1310.-	1
3 way	3SB5803-4AC3	1820.-	1
Contact Block			
Contact block for base mounting, 1NO	■ 3SB54200B	125.-	10
Contact block for base mounting, 1NC	■ 3SB54200C	125.-	10
Inscription Labels (set of 11 labels)			
Set of 11 labels: Start, Stop, On, OFF, Up, Down, Open, Close Forward, Reverse, Emergency Off	3SB5901-3EA	235.-	10
Blanking plug			
Blanking plug	3SB5912-0BC	65.-	10

Accessories

Description	Type	Unit LP ₹	Std Pkg (nos.)
Inscription plates	START	■ 3SB5901-2EL	10
	STOP	■ 3SB5901-2EK	10
	ON	■ 3SB5901-2EB	10
	OFF	■ 3SB5901-2EC	10
	UP	3SB5901-2ED	10
	DOWN	3SB5901-2EE	10
	FORWARD	3SB5901-2EF	10
	SLOW	3SB5901-2ES	10
	FAST	3SB5901-2ER	10
	REVERSE	3SB5901-2EG	10
	BLANK	3SB5901-2AA	10
	TRIP	3SB5901-2EA	10
Thrust cap for Push Buttons (for actuating middle module)	■ 3SB5902-0AA	45.-	10
Thrust pad for Selector Actuators (for actuating middle module)	■ 3SB5912-0AN	45.-	10
Adaptor plate for replacing 30 mm PB by 22 mm	■ 3SB5921-0AE	45.-	10
E-stop Yellow dia. 75 mm for Mushroom - Blank (Yellow contrast label)	3SB5921-0AB	45.-	10
E-stop Yellow dia. 75mm with "EMERGENCY STOP" printing	3SB5921-0AD	45.-	10
Protective Cap (IP-67) for	Normal	3SB5902-0AK	60.-
	Raised	3SB5902-0AN	10
Metallic holder for front connection actuators (when used outside 3SB508 stations)	3SB5911-1AA	75.-	10

■ Stock items



SIRIUS 3SE5

Position Switches

Modular design for all applications

Modular design with many standardized components

- Plug-in design and replacement of the actuator heads
- Exchangeable two and three pole contact blocks
- Turnable actuator heads around the axis in increments of 22.5°, with total 16 positions
- Quick-connect technology
- Optional LED Displays
- Communication Capable (AS-i Safe)

www.siemens.co.in

SIEMENS

Position Switches - 3SE5

Open Type 30mm

Actuator Type		Contact Arrangement	No. of Contacts	Type	Unit LP ₹	Std. pkg. (nos.)
Open		Snap Action	1NO + 1NC	3SE5250-0CC05	655.-	10
		Slow Action		3SE5250-0BC05	625.-	10

Open Type 30mm

Actuator Type		Contact Arrangement	No. of Contacts	Type	Unit LP ₹	Std. pkg. (nos.)
Open		Snap Action	1NO + 2NC	3SE5250-0LC05	1015.-	10
		Slow Action	1NO + 2NC	3SE5250-0KC05		10
		Slow action contacts with make before break	1NO + 2NC	3SE5250-0MC05		10
		Slow action	2NO + 1 NC	3SE5250-0PC05		10

Plastic enclosure: Enclosed type modular unit

Basic switch

Width	Basic switch	Contact Arrangement	No. of Contacts	Type	Unit LP ₹	Std. pkg. (nos.)
31mm (IP 65)		Snap Action	1NO + 1NC	3SE5232-0CC05	730.-	1
		Slow Action	1NO + 1NC	3SE5232-0BC05	705.-	1
		Snap Action	1NO + 2NC	3SE5232-0LC05	1065.-	1
		Slow Action	1NO + 2NC	3SE5232-0KC05		1
		Slow-action contacts with make-before-break	1NO + 2NC	3SE5232-0MC05		1
		Slow Action	2NO + 1NC	3SE5232-0PC05		1
50mm (IP 66/67)		Snap Action	1NO + 1NC	3SE5242-0CC05	780.-	1
		Slow Action	1NO + 1NC	3SE5242-0BC05	715.-	1
		Snap Action	1NO + 2NC	3SE5242-0LC05	1150.-	1
		Slow Action	1NO + 2NC	3SE5242-0KC05		1
		Slow-action contacts with make-before-break	1NO + 2NC	3SE5242-0MC05		1
		Slow Action	2NO + 1NC	3SE5242-0PC05		1

Metal enclosure: Enclosed type modular unit IP 66/ IP 67

Basic switch

Width	Basic switch	Contact Arrangement	No. of Contacts	Type	Unit LP ₹	Std. pkg. (nos.)
31mm		Snap Action	1NO + 1NC	3SE5212-0CC05	1160.-	1
		Slow Action	1NO + 1NC	3SE5212-0BC05	1050.-	1
		Snap Action	1NO + 2NC	3SE5212-0LC05	1245.-	1
		Slow Action	1NO + 2NC	3SE5212-0KC05		1
		Slow-action contacts with make-before-break	1NO + 2NC	3SE5212-0MC05	1320.-	1
		Slow Action	2NO + 1NC	3SE5212-0PC05		1
40mm		Snap Action	1NO + 1NC	3SE5112-0CA00	1250.-	1
		Slow Action	1NO + 1NC	3SE5112-0BA00	1120.-	1
		Snap Action	1NO + 2NC	3SE5112-0LA00	1350.-	1
		Slow Action	1NO + 2NC	3SE5112-0KA00		1
		Slow-action contacts with make-before-break	1NO + 2NC	3SE5112-0MA00	1420.-	1
		Slow Action	2NO + 1NC	3SE5112-0PA00		1
56mm		Snap Action	1NO + 1NC	3SE5122-0CA00	1400.-	1
		Slow Action	1NO + 1NC	3SE5122-0BA00	1280.-	1
		Snap Action	1NO + 2NC	3SE5122-0LA00	1785.-	1
		Slow Action	1NO + 2NC	3SE5122-0KA00		1
		Slow-action contacts with make-before-break	1NO + 2NC	3SE5122-0MA00	1940.-	1
		Slow Action	2NO + 1NC	3SE5122-0PA00		1

Plastic Roller Actuators heads for plastic 31mm & 50mm and Metal 31mm

Actuator Type	Actuators heads	Type	Unit LP ₹	Std. pkg. (nos.)
Roller Plunger		3SE5000-0AD03	265.-	5
Roller lever		3SE5000-0AE10	135.-	5
Angular Roller lever		3SE5000-0AF10	165.-	5
Part turn actuator for twist lever		3SE5000-0AK00	140.-	5
Twist Lever		3SE5000-0AA21#	115.-	5
Twist Lever (Adjustable)		3SE5000-0AA50#	230.-	5
Twist lever 50mm dia (Adjustable) Rubber Roller		3SE5000-0AA58#	345.-	5
Twist lever 50mm dia (Adjustable) Plastic roller NEW		3SE5000-0AA57#	255.-	5

Plastic Roller Actuators heads for metal 40mm and 56mm

Actuator Type	Actuators heads	Type	Unit LP ₹	Std. pkg. (nos.)
Roller lever		3SE5000-0AE01	195.-	5
Angular Roller lever		3SE5000-0AF01	355.-	5
Part turn actuator for twist lever		3SE5000-0AH00	285.-	5
Twist Lever		3SE5000-0AA01#	135.-	5
Twist Lever (Adjustable)		3SE5000-0AA50#	230.-	5
Fork type		3SE5000-0AT01\$	165.-	5
Mounting Head for Fork Type		3SE5000-0AT10	1475.-	5
Twist lever 50mm dia (Adjustable)		3SE5000-0AA58#	345.-	5
Twist lever 50mm dia (Adjustable) Plastic roller NEW		3SE5000-0AA57#	255.-	5

Notes:


- The basic switch comes with a Teflon plunger, in case of rounded plunger requirements no need to order actuator separately
- # Twist levers are to be ordered with part turn actuator to allow fitment on enclosure
- \$ Fork type actuator shall be ordered with mounting head 3SE5000-0AT10

Metal Roller Actuators heads for plastic 31mm & 50mm and Metal 31mm

Actuator Type	Actuators heads	Type	Unit LP ₹	Std. pkg. (nos.)
Roller Plunger		3SE5000-0AD04	300.-	5
Roller lever		3SE5000-0AE11	205.-	5
Part turn actuator for twist lever		3SE5000-0AK00	140.-	5
Twist Lever (Adjustable)		3SE5000-0AA51#	270.-	5
Plain Plunger		3SE5000-0AB01	380.-	5

Metal Roller Actuators heads for metal 40mm and 56mm

Actuator Type	Actuators heads	Type	Unit LP ₹	Std. pkg. (nos.)
Rounded Plunger		3SE5000-0AC02	240.-	5
Roller Plunger		3SE5000-0AD02	360.-	5
Roller lever		3SE5000-0AE02	325.-	5
Angular Roller lever		3SE5000-0AF02	400.-	5
Part turn actuator for twist lever		3SE5000-0AH00	285.-	5
Twist Lever		3SE5000-0AA02#	160.-	5
Twist Lever (Adjustable)		3SE5000-0AA51#	270.-	5



Spare and Accessories

Actuator Type		Description	Type	Unit LP ₹	Std. pkg. (nos.)
Empty enclosures		Empty enclosures without contact block	3SE5250-0AC05	270.-	10

Spares for Open & enclosed switch

Actuator Type		Contact Arrangement	No. of Contacts	Type	Unit LP ₹	Std. pkg. (nos.)
Contact block		Slow action	1NO + 1NC	3SE5050-0BA00*	555.-	10
		Snap action		3SE5050-0CA00*		10
		Slow action		3SE5000-0BA00		10
		Snap action		3SE5000-0CA00		10
		Slow action	1NO + 2NC	3SE5000-0KA00	705.-	10
		Snap action		3SE5000-0LA00		10
		Slow-action contacts with make-before-break		3SE5000-0MA00	740.-	10
		Slow action		3SE5000-0PA00		10

Note: 3SE5000-0BA00 can be used only with enclosed type switch

* Suitable for Open execution

Actuator Type		Description	Type	Unit LP ₹	Std. pkg. (nos.)
Cable gland		Molded Plastic Cable Gland, M20X1.5	3SX9926	775.-	5


Actuator Type		Type	Type	Unit LP ₹	Std. pkg. (nos.)
31MM		Plastic	3SE5232-0AC05	500.-	1
50MM			3SE5242-0AC05	740.-	1
31MM		Metal	3SE5212-0AC05	840.-	1
40MM			3SE5112-0AA00	1015.-	1
56MM			3SE5122-0AA00	1140.-	1



SIRIUS Safety switches

Mechanical Safety Switches With Tumbler

The safety switches with tumbler are exceptional safety-related devices which prevent an unforeseen or intentional opening of protective doors, protective grilles or other covers as long as a dangerous situation is present. Single switch can be used for SIL 2 / PL d safety level and with the use of a second switch SIL 3 / PL e safety level can be achieved.



		Solenoid Voltage	Plastic Enclosure 1300N Locking Force	Metal Enclosure 2600N Locking Force
 3SE5322-0SD21	With auxiliary release	24VDC	3SE5322-0SD21	3SE5312-0SD11
		115VAC	3SE5322-0SD22	3SE5312-0SD12
		230VAC	3SE5322-0SD23	3SE5312-0SD13
 3SE5322-0SE21	With auxiliary release with lock	24VDC	3SE5322-0SE21	3SE5312-0SE11
		115VAC	3SE5322-0SE22	3SE5312-0SE12
		230VAC	3SE5322-0SE23	3SE5312-0SE13
 3SE5322-0SF21	With escape release from the front	24VDC	3SE5322-0SF21	3SE5312-0SF11
		115VAC	3SE5322-0SF22	3SE5312-0SF12
		230VAC	3SE5322-0SF23	3SE5312-0SF13
 3SE5322-0SG21	With escape release from the back and auxiliary release from the front	24VDC	3SE5322-0SG21	3SE5312-0SG11
		115VAC	3SE5322-0SG22	3SE5312-0SG12
		230VAC	3SE5322-0SG23	3SE5312-0SG13
 3SE5322-0SJ21	With emergency release from the back and auxiliary release from the front	24VDC	3SE5322-0SJ21	3SE5312-0SJ11
		115VAC	3SE5322-0SJ22	3SE5312-0SJ12
		230VAC	3SE5322-0SJ23	3SE5312-0SJ13
 3SE5322-0SB21	Solenoid-locked	24VDC	3SE5322-0SB21	3SE5312-0SB11
		115VAC	3SE5322-0SB22	3SE5312-0SB12
		230VAC	3SE5322-0SB23	3SE5312-0SB13



3SE5000-0AV01



3SE5000-0AV02



3SE5000-0AV03



3SE5000-0AV05-1AA6



3SE5000-0AV07

Accessories

Description		Type
Standard actuator	Length 75.6 mm	3SE5000-0AV01
	With vertical fixing, length 53 mm	3SE5000-0AV02
	With transverse fixing, length 47 mm	3SE5000-0AV03
Radius actuator length 51mm	Direction of approach from the left	3SE5000-0AV04
	Direction of approach from the right	3SE5000-0AV06
Universal radius actuator	Length 77 mm	3SE5000-0AV05
	Length 77 mm, tab rotated 90°	3SE5000-0AV05-1AA6
Universal radius actuator, heavy duty	Length 67 mm	3SE5000-0AV07-1AK2
	Length 77 mm	3SE5000-0AV07

Prices available on request

Integrated connection of the field level to the control – revolutionized automation applications with AS-i and benefits

www.siemens.com/as-interface


AS-I Masters and Power supplies



I/O Modules



Integrated Solutions

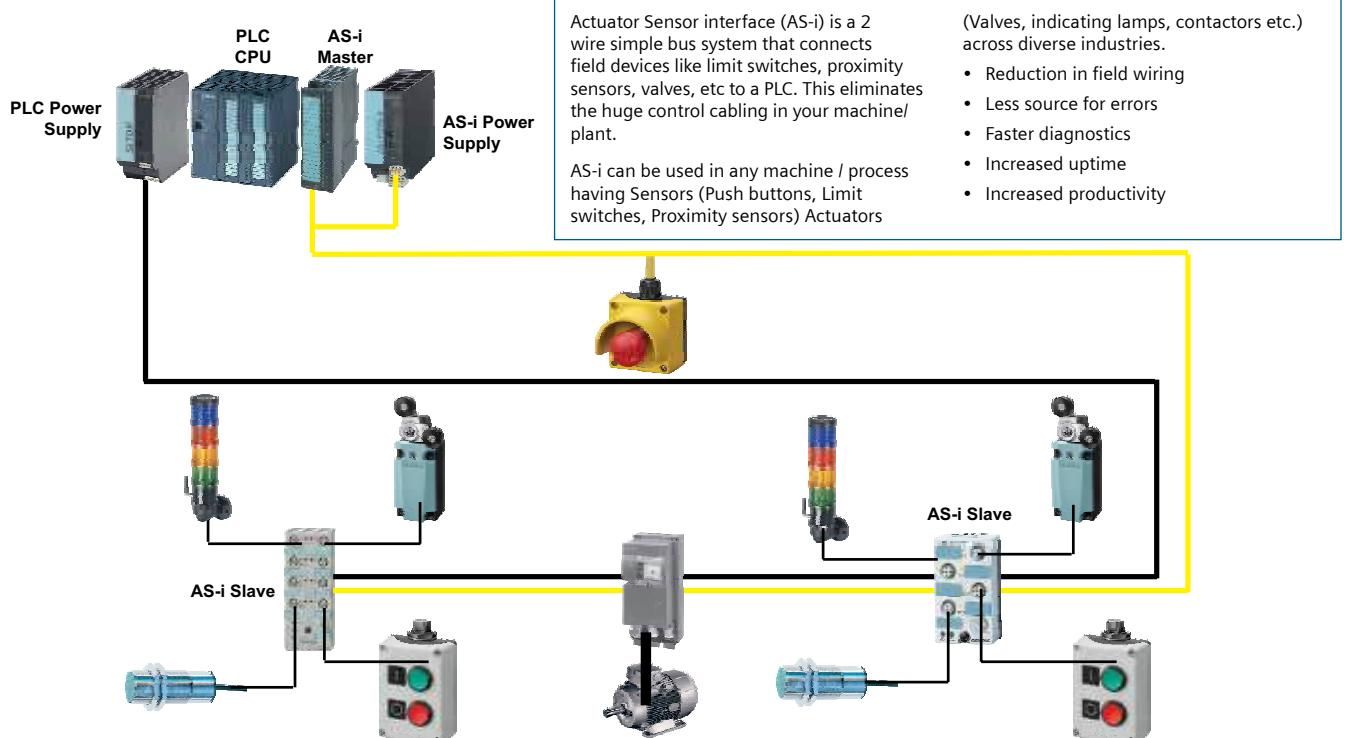



PROFI[®]
BUS

PROFI[®]
NET

EtherNet/IP

OPC UA

SIMOCODE pro:

Flexible, modular and safe

The made-to-measure motor management system

- Motor protection, monitoring and control in a single system
- Fail-safe disconnection of motors
- Detailed operating, service and diagnostics data
- Open communication via PROFIBUS / PROFINET and OPC UA

www.siemens.co.in

SIEMENS

SIMOCODE Pro

Basic Unit

Description	Type
Pro S on Profibus with 110-240VAC/DC control	3UF7020-1AU01-0
Pro S on Profibus with 24VDC control	3UF7020-1AB01-0
Pro V on Profibus with 110-240VAC/DC control	3UF7010-1AU00-0
Pro V on Profibus with 24VDC control	3UF7010-1AB00-0
Pro C on Profibus with 110-240VAC/DC control	3UF7000-1AU00-0
Pro C on Profibus with 24VDC control	3UF7000-1AB00-0
Pro V PN on Profinet with 110-240VAC/DC control	3UF7011-1AU00-0
Pro V PN on Profinet with 24VDC control	3UF7011-1AB00-0
Pro V on Modbus RTU with 110-240VAC/DC control	3UF7012-1AU00-0
Pro V on Modbus RTU with 24VDC control	3UF7012-1AB00-0
Pro V on EtherNet/IP with 110-240VAC/DC control	3UF7013-1AU00-0
Pro V on EtherNet/IP with 24VDC control	3UF7013-1AB00-0

Current Measuring Module

Description	Type
0.3 to 3A	3UF7100-1AA00-0
2.4 to 25A	3UF7101-1AA00-0
10 to 100A	3UF7102-1AA00-0
20 to 200A	3UF7103-1AA00-0
20 to 200A (Busbar Connection)	3UF7103-1BA00-0
63 to 630A (Busbar Connection)	3UF7104-1BA00-0

Current/Voltage Measuring Module (2nd generation)

Description	Type
0.3 to 4A	3UF7110-1AA01-0
3.0 to 40A	3UF7111-1AA01-0
10 to 115A	3UF7112-1AA01-0
20 to 200A	3UF7113-1AA01-0
20 to 200A (Busbar Connection)	3UF7113-1BA01-0
63 to 630A (Busbar Connection)	3UF7114-1BA01-0

Prices available on request

Operator Panel (Optional)

Description	Type
Operator Panel (for Pro S)	3UF7200-1AA01-0
Operator Panel (for Pro C, Pro V)	3UF7200-1AA00-0
Operator Panel with Display (for Pro V)	3UF7210-1AA01-0

Connecting Cable

Description	Type
Side by Side (0.025m flat)	3UF7930-0AA00-0
Length 0.1m (flat)	3UF7931-0AA00-0
Length 0.3m (flat)	3UF7935-0AA00-0
Length 0.5m (flat)	3UF7932-0AA00-0
Length 0.5m (round)	3UF7932-0BA00-0
Length 1m (round)	3UF7937-0BA00-0
Length 2.5m (round)	3UF7933-0BA00-0


Configuration Software

Description	Type
Premium upgrade for SIMOCODE ES 2007	3ZS1322-6CC15-0YE5
SIMOCODE ES V17 (TIA Portal) Premium Package – Floating license	3ZS1322-6CC15-0YA5


Accessories

Description	Type
PC Cable for PC/PG communication - USB connection	3UF7941-0AA00-0
Memory Module for pro S, pro C & pro V on Profibus	3UF7900-0AA01-0
Memory Module for pro V PN on Profinet	3UF7901-0AA01-0
Addressing Plug for pro S, pro C & pro V on Profibus	3UF7910-0AA00-0
Door Adaptor	3UF7920-0AA00-0
Initialization module for the automatic parameterization of SIMOCODE pro S/pro V	3UF7902-0AA00-0

Your benefits through active power-based dry running protection

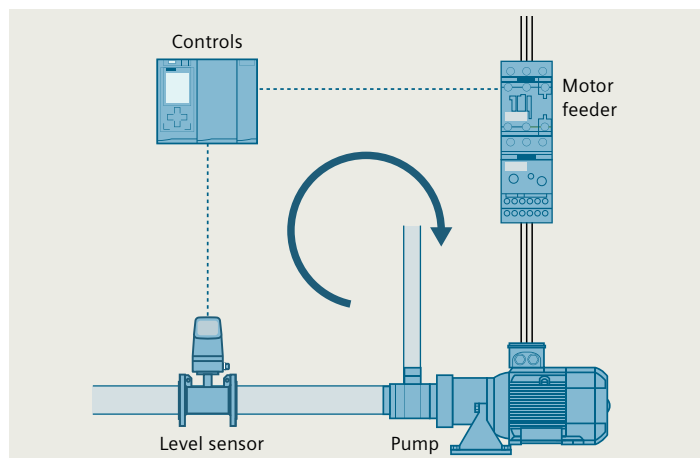


Conventional dry running monitoring with a sensor

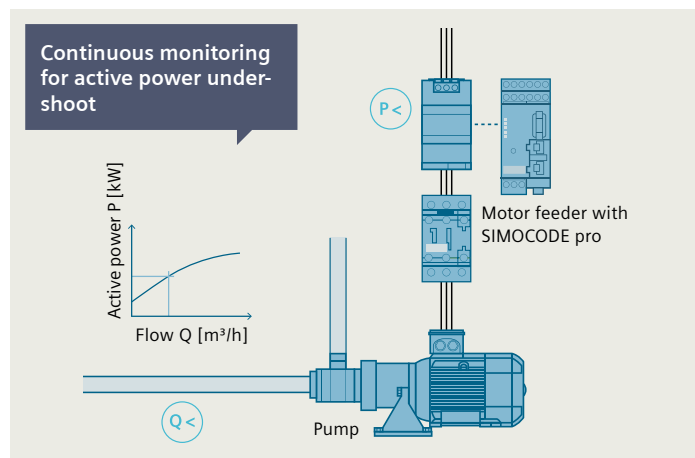

Active power-based dry running protection

Earlier fault detection • Direct conclusions concerning the flow rate can be drawn from the active power consumption of the pump motor • Reliable prevention of dry running of the pump and therefore less damage to the pump	Cost and time savings • No maintenance effort due to the elimination of mechanical wear of the sensors • No additional sensor required	Reduction of hardware • No need for additional sensors and mechanical components • Simplified engineering	Reliable monitoring of the system • Compliance with ATEX and IECEx criteria • Reliable and automatic pump switch-off in the event of inadmissible operating conditions
--	---	--	---

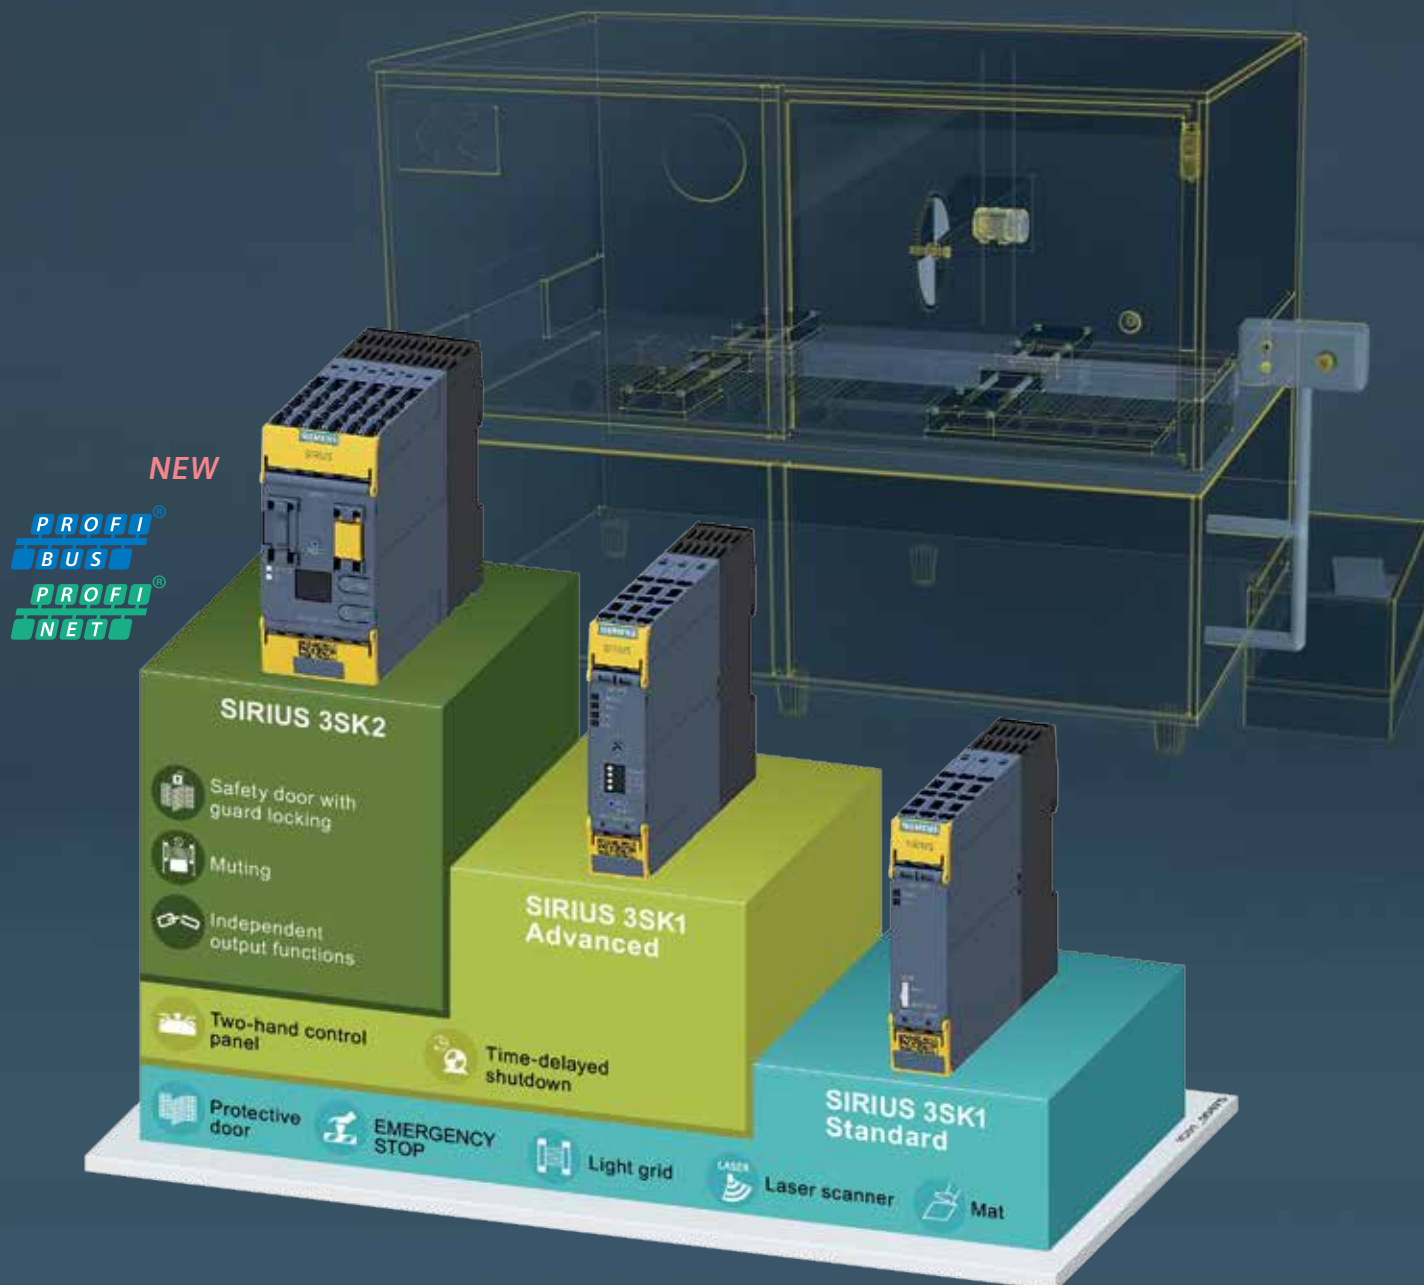

SIRIUS 3SK Safety relays

Select the optimum device – precisely for your application

SIRIUS 3SK safety relays offer outstanding simplicity and flexibility. Their modular design simplifies the planning, commissioning and expansion of plants. Simple safety functions, such as EMERGENCY STOP and protective door monitoring up to SIL 3 and PL e, can be quickly implemented without programming.

The safety relays are certified in accordance with IEC 62061 and ISO 13849-1 and are internationally applicable. The 3SK1 and 3SK2 versions of the device are available to meet differing requirements. The devices can be used for both stand-alone and integrated solutions.

www.siemens.com/safety-relays

SIEMENS

SIRIUS 3SK Safety relays

Relay enable circuit	Semiconductor enable circuit	Contacts				Rated control supply voltage	Unit LP ₹	MOQ
		EC	SC	EC (td)	Adjustable Time Delay (td)			
SIRIUS 3SK1 standard basic units								
3SK1111-1AB30		3	1	--	--	24V AC/DC	28010.-	1
3SK1111-1AW20		3	1	--	--	110-240V AC/DC	28010.-	1
	3SK1112-1BB40	2	1	--	--	24V DC	25750.-	1
SIRIUS 3SK1 advanced basic units								
3SK1121-1CB41		2	--	2	0.05...3 Sec	24V DC	42930.-	1
3SK1121-1CB42		2	--	2	0.5...30 Sec	24V DC	42930.-	1
3SK1121-1CB44		2	--	2	5.0...300 Sec	24V DC	42930.-	1
	3SK1122-1CB41	2	--	2	0.05...3 Sec	24V DC	25750.-	1
	3SK1122-1CB42	2	--	2	0.5...30 Sec	24V DC	25750.-	1
	3SK1122-1CB44	2	--	2	5.0...300 Sec	24V DC	25750.-	1
SIRIUS 3SK1 Output expansion module								
3SK1211-1BB00		4	1			24V AC	25240.-	1
3SK1211-1BB40		4	1			24V DC	25240.-	1
3SK1211-1BW20		4	1			110-240V AC/DC	25240.-	1
SIRIUS 3SK2 Basic Unit								
	3SK2112-1AA10	10	--	2	0.05...3 Sec	24V DC	Prices available on request	1
	3SK2122-1AA10	20	--	4	0.05...3 Sec			1

Note: EC = enable Circuit(s), SC = signaling circuit(s), td = delayed

Everything for your safety

Detecting

Which sensors can be connected?



SIRIUS 3SE5 position switches



SIRIUS ACT / 3SB5 Emergency STOP



SIRIUS ACT Two-hand operation consoles



SIRIUS foot switches

Evaluating

How can you perform quick, flexible evaluation?



SIRIUS 3SK Safety relays



SIRIUS 3RQ1 Coupling relays

Reacting

Which actuators can be connected?



SIRIUS 3RT Contactors



SIRIUS 3RW Soft Starter



SIRIUS 3RM1 Motor Starters

SIRIUS 3RQ1 coupling relays NEW

The 3RQ1 relays are force-guided in accordance with IEC 60947-5-1 (IEC 61810-3), the mechanical connection between the contacts ensures the NO and NC contacts are never closed simultaneously. This means failures to open can be reliably recognized in order to ensure maximum safety.

These coupling relays are also an integral component of the 3SK safety relay system and serve as an output expansion module. 3RQ1 coupling relays are available in two variants to fulfill SIL 2 & SIL 3.



Type	Contacts		Rated control supply voltage	Unit LP ₹	MOQ
	NO	NC			
3RQ1000-1EB00	1	1	24V DC	Prices available on request	1
3RQ1000-1GB00	2	1			1
3RQ1000-1HB00	2	2			1
3RQ1000-1LB00	4	1			1


Safety evaluation with TIA selection tool - The fast way to a safe solution
www.siemens.com/safety

3TS Capacitor
Duty Contactor

4RB LV
Capacitors

7UG0 APFC
controller

4KA Detuned
Reactors

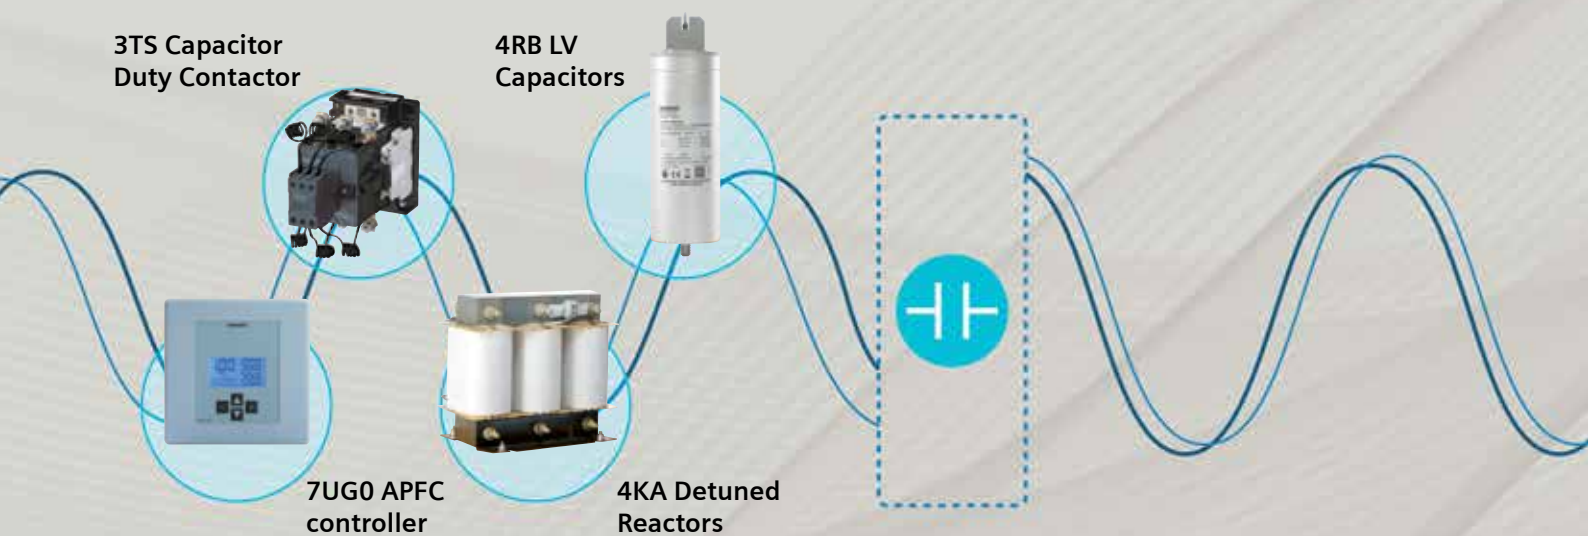

Power Quality Solutions

www.siemens.co.in

SIEMENS

SIECAP™ LV Power Capacitors

ND⁺ (Normal Duty) - Al Can, MPP resin filled

- High pulse current withstand capability (upto 200.I_N)
- Long life expectancy upto 100000 hrs
- Self healing type
- Inbuilt over pressure disconnecter
- Shock hazard protected SIGUT terminals



Rated voltage V	kvar @ 50 Hz	Type	Unit LP* ₹	Std. pkg. (nos.)
440	5	4RB2050-3EE52-8K	2675.-	1
	6	4RB2060-3EE52-8K	2510.-	1
	7	4RB2070-3EE52-8K	2930.-	1
	7.5	4RB2075-3EE52-8K	3145.-	1
	8.3	4RB2083-3EE52-8K	3480.-	1
	9	4RB2090-3EE52-8K	3770.-	1
	10	4RB2100-3EE52-8K	4195.-	1
	12.5	4RB2125-3EE52-8K	4525.-	1
	15	4RB2150-3EE52-8K	5425.-	1
	16.7	4RB2167-3EE52-8K	6030.-	1
	20	4RB2200-3EE52-8K	7220.-	1
	20.8	4RB2208-3EE52-8K	7520.-	1
	25	4RB2250-3EE52-8K	9040.-	1
	28	4RB2280-3EE52-8K	10120.-	1
	30	4RB2300-3EE52-8K	10850.-	1

Rated voltage V	kvar @ 50 Hz	Type	Unit LP* ₹	Std. pkg. (nos.)
480	5	4RB2050-3EJ52-8K	2465.-	1
	5.5	4RB2055-3EJ52-8K	2725.-	1
	8.3	4RB2083-3EJ52-8K	3635.-	1
	10.4	4RB2104-3EJ52-8K	4555.-	1
	11.1	4RB2111-3EJ52-8K	4645.-	1
	12.5	4RB2125-3EJ52-8K	4765.-	1
	13.8	4RB2138-3EJ52-8K	5255.-	1
	15	4RB2150-3EJ52-8K	5710.-	1
	16.7	4RB2167-3EJ52-8K	6350.-	1
	20.8	4RB2208-3EJ52-8K	7920.-	1
	25	4RB2250-3EJ52-8K	9510.-	1
	27.7	4RB2277-3EJ52-8K	10540.-	1
	30	4RB2300-3EJ52-8K	11420.-	1

Purchase MOQ for our dealers is in multiples of standard packing, please contact your nearest Siemens Sales Office for further details.

For information on less than 5 kvar and other kvar ratings at different voltages and frequency and use with detuned reactors, please contact your nearest Siemens Sales Office.



SIECAP™ LV Power Capacitors

HD (Heavy Duty) - Al Can, MPP resin filled

- High pulse current withstand capability (up to $250.I_N$)
- Long life expectancy up to 130000 hrs
- Self healing type
- Inbuilt over pressure disconnecter
- Shock hazard protected SIGUT terminals



Rated voltage V	kvar @ 50 Hz	Type	Unit LP* ₹	Std. pkg. (nos.)
415	5	4RB2050-3EB53-8K	3280.-	1
	7.5	4RB2075-3EB53-8K	4360.-	1
	10.4	4RB2104-3EB53-8K	6050.-	1
	12.5	4RB2125-3EB53-8K	6565.-	1
	15	4RB2150-3EB53-8K	7880.-	1
	20	4RB2200-3EB53-8K	10505.-	1
	25	4RB2250-3EB53-8K	13130.-	1
440	5	4RB2050-3EE53-8K	3380.-	1
	7.5	4RB2075-3EE53-8K	4360.-	1
	10	4RB2100-3EE53-8K	5815.-	1
	12.5	4RB2125-3EE53-8K	6565.-	1
	15	4RB2150-3EE53-8K	7880.-	1
	20	4RB2200-3EE53-8K	10505.-	1
	25	4RB2250-3EE53-8K	13130.-	1
	28.1	4RB2281-3EE53-8K	14750.-	1
	30	4RB2300-3EE53-8K	15750.-	1

Rated voltage V	kvar @ 50 Hz	Type	Unit LP* ₹	Std. pkg. (nos.)
480	5	4RB2050-3EJ53-8K	3380.-	1
	6.3	4RB2063-3EJ53-8K	3780.-	1
	8.3	4RB2083-3EJ53-8K	4980.-	1
	10.4	4RB2104-3EJ53-8K	5665.-	1
	11	4RB2110-3EJ53-8K	5990.-	1
	12.5	4RB2125-3EJ53-8K	6800.-	1
	13.8	4RB2138-3EJ53-8K	7510.-	1
	15	4RB2150-3EJ53-8K	8160.-	1
	16.7	4RB2167-3EJ53-8K	9080.-	1
	18.7	4RB2187-3EJ53-8K	10170.-	1
	20	4RB2200-3EJ53-8K	10885.-	1
	22	4RB2220-3EJ53-8K	11960.-	1
	25	4RB2250-3EJ53-8K	13590.-	1
	28.1	4RB2281-3EJ53-8K	15280.-	1
	30	4RB2300-3EJ53-8K	16310.-	1
525	5	4RB2050-3FC53-8K	3485.-	1
	6.3	4RB2063-3FC53-8K	3910.-	1
	8.3	4RB2083-3FC53-8K	5140.-	1
	10.4	4RB2104-3FC53-8K	5850.-	1
	12.5	4RB2125-3FC53-8K	7040.-	1
	13.2	4RB2132-3FC53-8K	7430.-	1
	15	4RB2150-3FC53-8K	8435.-	1
	16.7	4RB2167-3FC53-8K	9410.-	1
	20	4RB2200-3FC53-8K	11250.-	1
	25	4RB2250-3FC53-8K	14065.-	1
	26.5	4RB2265-3FC53-8K	14910.-	1
	30	4RB2300-3FC53-8K	16880.-	1
	33.1	4RB2331-3FC53-8K	18620.-	1

Purchase MOQ for our dealers is in multiples of standard packing, please contact your nearest Siemens Sales Office for further details.

For information on less than 5 kvar and other kvar ratings at different voltages and frequency and use with detuned reactors, please contact your nearest Siemens Sales Office.



Std. Pkg. = 1 unit

LP - List Price

SIECAP™ LV Power Capacitors

SHD (Super Heavy Duty) - Al Can, MPP resin filled

- High pulse current withstand capability (upto 500.I_N)
- Long life expectancy upto 200000 hrs
- Self healing type
- Inbuilt over pressure disconnecter
- Shock hazard protected SIGUT terminals



Rated voltage V	kvar @ 50 Hz	Type	Unit LP* ₹	Std. pkg. (nos.)
415	5	4RB1050-3EB50-8K	3740.-	1
	6.3	4RB1063-3EB50-8K	4180.-	1
	7.5	4RB1075-3EB50-8K	4975.-	1
	10.4	4RB1104-3EB50-8K	6905.-	1
	12.5	4RB1125-3EB50-8K	7495.-	1
	15	4RB1150-3EB50-8K	8995.-	1
	20	4RB1200-3EB50-8K	11995.-	1
	25	4RB1250-3EB50-8K	14995.-	1
	28.1	4RB1281-3EB50-8K	16840.-	1
	30	4RB1300-3EB50-8K	17990.-	1
	33	4RB1330-3EB50-8K	19790.-	1
440	5	4RB1050-3EE50-8K	3860.-	1
	7.5	4RB1075-3EE50-8K	4975.-	1
	10	4RB1100-3EE50-8K	6640.-	1
	10.4	4RB1104-3EE50-8K	6905.-	1
	12.5	4RB1125-3EE50-8K	7495.-	1
	15	4RB1150-3EE50-8K	8995.-	1
	16.7	4RB1167-3EE50-8K	10015.-	1
	20	4RB1200-3EE50-8K	11995.-	1
	25	4RB1250-3EE50-8K	14995.-	1
	28.1	4RB1281-3EE50-8K	16840.-	1
	30	4RB1300-3EE50-8K	17990.-	1
	33.1	4RB1331-3EE50-8K	19850.-	1
480	5	4RB1050-3EJ50-8K	3860.-	1
	6.3	4RB1063-3EJ50-8K	4315.-	1
	8.3	4RB1083-3EJ50-8K	5690.-	1
	10.4	4RB1104-3EJ50-8K	6460.-	1
	11	4RB1111-3EJ50-8K	6840.-	1
	12.5	4RB1125-3EJ50-8K	7765.-	1
	13.8	4RB1138-3EJ50-8K	8580.-	1
	15	4RB1150-3EJ50-8K	9320.-	1
	16.7	4RB1167-3EJ50-8K	10370.-	1
	18.7	4RB1187-3EJ50-8K	11615.-	1
	20	4RB1200-3EJ50-8K	12425.-	1
	22	4RB1220-3EJ50-8K	13660.-	1
	25	4RB1250-3EJ50-8K	15520.-	1
	28.1	4RB1281-3EJ50-8K	17450.-	1
	30	4RB1300-3EJ50-8K	18625.-	1
	31	4RB1310-3EJ50-8K	19255.-	1
	33	4RB1330-3EJ50-8K	20500.-	1

Rated voltage V	kvar @ 50 Hz	Type	Unit LP* ₹	Std. pkg. (nos.)
525	5	4RB1050-3FC50-8K	3975.-	1
	6.3	4RB1063-3FC50-8K	4465.-	1
	8.3	4RB1083-3FC50-8K	5870.-	1
	10.4	4RB1104-3FC50-8K	6680.-	1
	12.5	4RB1125-3FC50-8K	8035.-	1
	13.2	4RB1132-3FC50-8K	8485.-	1
	15	4RB1150-3FC50-8K	9635.-	1
	16.7	4RB1167-3FC50-8K	10740.-	1
	20	4RB1200-3FC50-8K	12845.-	1
	25	4RB1250-3FC50-8K	16060.-	1
	26.5	4RB1265-3FC50-8K	17030.-	1
	30	4RB1300-3FC50-8K	19280.-	1
690	33.1	4RB1331-3FC50-8K	21265.-	1
	5.3	4RB1053-3GK50-8K	3515.-	1
	6.9	4RB1068-3GK50-8K	4590.-	1
	10.4	4RB1104-3GK50-8K	6905.-	1
	12.5	4RB1125-3GK50-8K	8305.-	1
	14.6	4RB1146-3GK50-8K	9695.-	1
	20	4RB1200-3GK50-8K	13280.-	1
	25	4RB1250-3GK50-8K	16600.-	1

Purchase MOQ for our dealers is in multiples of standard packing, please contact your nearest Siemens Sales Office for further details

For information on less than 5 kvar and other kvar ratings at different voltages and frequency and use with detuned reactors, please contact your nearest Siemens Sales Office.

Harmonics filter

Detuned reactor

Features

- Insulation class H
- High linearity
- Temperature control via micro switch
- Low losses and low noise



Copper Detuned Reactors

Bank size	Detuning factor	Type	Unit LP* ₹
5kvar	5.67%	4KA1220-1AC01-0AA0	18150.-
10kvar	5.67%	4KA1220-3AC01-0AA0	21540.-
12.5kvar	5.67%	4KA1220-4AC01-0AA0	25210.-
15kvar	5.67%	4KA1220-5AC01-0AA0	27235.-
20kvar	5.67%	4KA1220-6AC01-0AA0	29130.-
25kvar	5.67%	4KA1220-7AC01-0AA0	31165.-
5kvar	7%	4KA1220-1AA01-0AA0	18140.-
10kvar	7%	4KA1220-3AA01-0AA0	24880.-
12.5kvar	7%	4KA1220-4AA01-0AA0	26860.-
15kvar	7%	4KA1220-5AA01-0AA0	31020.-
20kvar	7%	4KA1220-6AA01-0AA0	33045.-
25kvar	7%	4KA1220-7AA01-0AA0	34770.-
50kvar	7%	4KA1220-2BA01-0AA0	61950.-
75kvar	7%	4KA1220-3BA03-0AA0	86880.-
100kvar	7%	4KA1220-4BA03-0AA0	109350.-
5kvar	14%	4KA1220-1AB01-0AA0	23880.-
12.5kvar	14%	4KA1220-4AB01-0AA0	40075.-
15kvar	14%	4KA1220-5AB01-0AA0	46925.-
20kvar	14%	4KA1220-6AB01-0AA0	57100.-
25kvar	14%	4KA1220-7AB01-0AA0	64205.-
50kvar	14%	4KA1220-2BB01-0AA0	104260.-
75kvar	14%	4KA1220-3BB03-0AA0	133385.-
100kvar	14%	4KA1220-4BB03-0AA0	193935.-

Aluminium Detuned Reactors

Bank size	Detuning factor	Type	Unit LP* ₹
5kvar	5.67%	4KA1420-1AC01-0AA0	13485.-
10kvar	5.67%	4KA1420-3AC01-0AA0	17195.-
12.5kvar	5.67%	4KA1420-4AC01-0AA0	18845.-
15kvar	5.67%	4KA1420-5AC01-0AA0	22285.-
20kvar	5.67%	4KA1420-6AC01-0AA0	25410.-
25kvar	5.67%	4KA1420-7AC01-0AA0	25730.-
50kvar	5.67%	4KA1420-2BC01-0AA0	46815.-
5kvar	7%	4KA1420-1AA01-0AA0	14355.-
10kvar	7%	4KA1420-3AA01-0AA0	18470.-
12.5kvar	7%	4KA1420-4AA01-0AA0	20425.-
15kvar	7%	4KA1420-5AA01-0AA0	23025.-
20kvar	7%	4KA1420-6AA01-0AA0	24520.-
25kvar	7%	4KA1420-7AA01-0AA0	26225.-
50kvar	7%	4KA1420-2BA01-0AA0	45090.-
75kvar	7%	4KA1420-3BA03-0AA0	61260.-
100kvar	7%	4KA1420-4BA03-0AA0	80115.-
5kvar	14%	4KA1420-1AB01-0AA0	19545.-
10kvar	14%	4KA1420-3AB01-0AA0	29315.-
12.5kvar	14%	4KA1420-4AB01-0AA0	31900.-
15kvar	14%	4KA1420-5AB01-0AA0	37765.-
20kvar	14%	4KA1420-6AB01-0AA0	41930.-
25kvar	14%	4KA1420-7AB01-0AA0	51160.-
50kvar	14%	4KA1420-2BB01-0AA0	90510.-



3TS Capacitor duty Contactors

Now in
TI - GREY **NEW**

The 3TS capacitor duty contactor (with **patented** de-latching technology) provides a reliable and economical solution for capacitor switching applications.

Features and Benefits

- De-latching operating principle
- SIGUT Termination technique
- Finger touch proof terminals
- Compact Dimensions
- DIN / Screw mounting
- Reliable switching of capacitor banks
- Ease of wiring (can obviate use of lugs)
- Operator Safety
- Space saving
- Flexible mounting



Capacitor kVAr 415V, 3ph, 50Hz	Built-in aux. contacts	Type®	Unit LP ₹	Built-in aux. contacts	Type®	Unit LP ₹	Std. pkg. (nos.)
5 kvar NEW	1 NO	3TS2110-0A..5-8K†	2420.-				
7 kvar	1 NO	3TS1110-0A..5-8K†	2660.-				
10 kvar NEW	–	3TS2200-0A..5-8K†	2890.-	1NO+1NC	3TS2211-0A..5-8K	3315.-	
12.5 kvar	–	3TS1200-0A..5-8K†	2960.-	1NO+1NC	3TS1211-0A..5-8K	3385.-	1
16 kvar	–	3TS1300-0A..5-8K†	4070.-	1NO+1NC	3TS1311-0A..5-8K	4490.-	1
20 kvar	–	3TS1400-0A..5-8K†	4585.-	1NO+1NC	3TS1411-0A..5-8K	4995.-	1
25 kvar	–	3TS1500-0A..5-8K†	5295.-	1NO+1NC	3TS1511-0A..5-8K	5725.-	1
30 kvar NEW	–	3TS2500-0A..5-8K†	8250.-	1NO+1NC	3TS2511-0A..5-8K	8675.-	1
40 kvar NEW	2 NO + 2 NC	3TS2722-0A..5-8K	14000.-				
50 kvar	2 NO + 2 NC	3TS1722-0A..5-8K	16390.-				

† Facility to add one contact block of 1NO / 1NC

@ AC 50Hz coil code - Please enter coil codes from table below

	For 3TS contactors		
Code	F0	P0	R0
Coil voltage (V)	110	230	415

Auxiliary contact blocks

For contactor	Description	Type	Unit LP ₹	Std. pkg. (nos.)
3TS1110-3TS1500	1NO	■ 3TX4010-2A	230.-	10
	1NC	■ 3TX4001-2A	230.-	10

3MT7 Capacitor Duty Contactors **NEW**

Capacitor kVar 440V AC, 3Ph, 50Hz	Built-in aux. contacts	Type	Unit LP ₹	Std. pkg. (nos.)
60kVar	1NO+2NC	3MT70060JA126A..	17420.-	1
80kVar	1NO+2NC	3MT70080JA126A..	21385.-	1
100kVar	1NO+2NC	3MT70100JA126A..	22225.-	1

Please add coil code from adjacent table

Note: For SIRIUS 3RT26 Capacitor Duty Contactors - Please contact Siemens

Refer Page No 41 for Capacitor Duty Contactor Spares

Coil 50/60Hz for 60 kVar contactor					
Coil Code	C2	G2	N2	P2	R2
Voltage	24V AC	110V AC	■ 220V AC	■ 240V AC	415V AC

Coil 50Hz for 80 & 100 kVar contactors				
Coil Code	F0	M0	U0	V0
Voltage	110V AC	■ 220V AC	■ 240V AC	415V AC



Automatic Power Factor Correction Relay (APFC relay)

Features

- Easy accessibility of parameters
- Universal control supply—optimizing the no of variants
- Automatic/ Linear/ rotational switching modes of banks
- Selectable 1A/ 5A current input
- LCD version with RS485 Communication MODBUS RTU Protocol
- Confirms to IEC60947-5-1, carry CE and RoHS Compliant




for more info
scan QR code



7UG0572-1GT20

Description		Type	Unit LP ₹	Std. pkg. (nos.)
Automatic Power factor correction relay (APFC relay)	8 Stage with LCD display	7UG0571-1FT20	22235.-	1
	12 Stage with LCD display	7UG0572-1GT20	23815.-	1
	12 stage with LED display	7UG0572-1GT21	13620.-	1

**Reliable
switching and
protection
of IE3/IE4
motors
at any time**

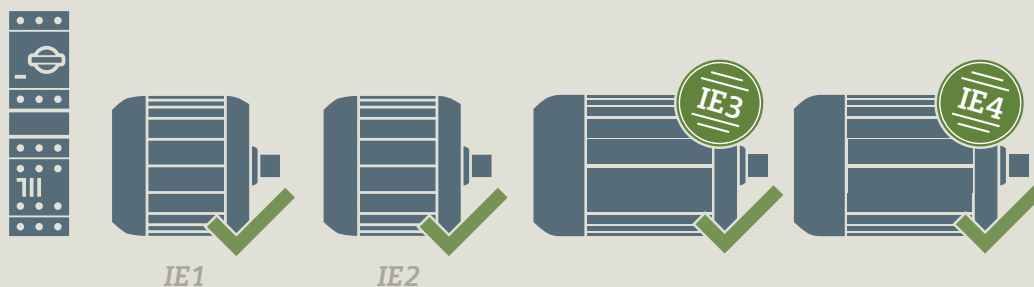

Fuseless selection type 2, I_q = 50kA, IS/IEC:60947-4-1 (Motor starter protector 3RV2 + Contactor 3RT)

Suitable for IE3/IE4

- The selection is valid only for complete Siemens combinations i.e. MPCB + contactor + bi-relay (+timer)
- In case this combination is changed to accommodate another brand/rating of MPCB/MCCB/contactor/BMR, it shall be the responsibility of the person making such a change to assure Type 2 performance.
- Selection is for normal starting conditions (Class 10 Feeder). For heavy starting applications (e.g. ID/FD fans, reciprocating compressor, ball mills etc.), please consult Siemens.
- All selections with MPCB are Type tested, selections with MCCB are recommended. For type tested selections & higher breaking capacity refer "Load feeder configuration manual".
- Low LCC = Low life cycle cost

3RV20 comes with in-built overload protection, hence external bi-relay is eliminated

Direct-on-line feeder, for low LCC

SL Motor		Circuit breaker®		Contactor		Bi-relay	
kW 415V, 3ph, 50/60 Hz	I _L Amps (Guide value)	Type	Rating Amps	Type	Rating Amps	Type	Set-Range Amp
0.37	1.1	3RV2011-0KA10	1.25	3RT2015	7	#	0.9 ... 1.1
0.55	1.5	3RV2011-1AA10	1.6	3RT2015	7	#	1.1 ... 1.4
0.75	1.9	3RV2011-1BA10	2	3RT2015	7	#	1.8 ... 2.2
1.1	2.7	3RV2011-1DA10	3.2	3RT2015	7	#	2.2 ... 2.8
1.5	3.6	3RV2011-1FA10	5	3RT2024	12	#	3.5 ... 4.5
2.2	5.0	3RV2011-1GA10	6.3	3RT2024	12	#	4.5 ... 5.5
3.7	6.5	3RV2011-1HA10	8	3RT2024	12	#	5.5 ... 7
4	8.5	3RV2011-1JA10	10	3RT2024	12	#	7 ... 9
5.5	11.5	3RV2011-1KA10	12.5	3RT2024	12	#	9 ... 10
7.5	15.5	3RV2021-4BA10	20	3RT2027	32	#	13 ... 16
11	22	3RV2021-4CA10	22	3RT2027	32	#	18 ... 23
15	29	3RV2021-4EA10*	32	3RT2027	32	#	27 ... 30
18.5	35	3RV2032-4PA10	36	3RT2035	40	#	28 ... 32
22	41	3RV2032-4VA10	45	3RT2036	50	#	35 ... 42
30	55	3RV2032-4XA10	59	3RT2037	65	#	49 ... 54
37	66	3RV2032-4KA10	73	3RT2038	80	#	62 ... 70
45	80	3RV2042-4RA10	84	3RT2045	80	#	65 ... 80
55	97	3RV2042-4MA10	100	3RT2047	110	#	80 ... 100
55	97	3VA2216-5MN32-0AA0	160	3RT1054	115	#	63 ... 115
75	132	3VA2216-5MN32-0AA0	160	3RT1055	150	#	63 ... 140
90	160	3VA2220-5MN32-0AA0	200	3RT1056	185	#	80 ... 175
110	195	3VA2325-5MN32-0AA0	250	3RT1064	225	#	100 ... 225
132	230	3VA2440-5MN32-0AA0	400	3RT1065	265	#	160 ... 265
160	280	3VA2440-5MN32-0AA0	400	3RT1066	300	#	160 ... 300
200	350	3VA2450-5MN32-0AA0	500	3RT1075	400	#	200 ... 400
250	430	3VA2450-5MN32-0AA0	500	3RT1076	500	#	200 ... 440

* Starting current up to 256A

\$ 3RV21 'relay function' motor protection circuit-breaker can also be used in place of 3RV10 / 3RV20 MPCB respectively

@ Motor switching operations with circuit breaker 3VA are not allowed.

Alternative combinations with 3VA1 available, contact nearest sales office

For more motor feeder selection charts with various SIRIUS devices see configuration manual "Configuring SIRIUS Innovations – Selection Data for Fuseless and Fused Load Feeders", <https://support.industry.siemens.com/cs/ww/en/view/39714188>



Fuseless selection type 2, I_q = 50kA, IS/IEC:60947-4-1 (3RV with 3RT & 3RU)

Suitable for IE2 motors

- The selection is valid only for complete Siemens combinations i.e. MPCB / MCCB + contactor + bi-relay (+timer)
- In case this combination is changed to accommodate another brand/rating of MPCB/MCCB/contactor/BMR, it shall be the responsibility of the person making such a change to assure Type 2 performance.
- Selection is for normal starting conditions (class 10 feeder). For heavy starting applications (e.g. ID/FD fans, reciprocating compressor, ball mills etc.), please consult Siemens.
- The electronic star-delta timer type 3RP should be used in star-delta feeders.
- All selections with MPCB are Type tested, selections with MCCB are recommended. For type tested selections & higher breaking capacity refer "Load feeder configuration manual".
- Low LCC = Low life cycle cost

Direct-on-line feeder, for low LCC

SL motor		Circuit breaker §		Contactor		Bi-relay	
kW 415V, 3ph, 50/60 Hz	I _L Amp	Type	Amp	Type	Amp	Type	Set-Range Amp
0.37	1.1	3RV2011-0KA10	1.25	3RT2015	7	#	0.9 ... 1.25
0.55	1.4	3RV2011-1AA10	1.6	3RT2015	7	#	1.1 ... 1.6
0.75	1.7	3RV2011-1BA10	2	3RT2015	7	#	1.4 ... 2
1.1	2.4	3RV2011-1DA10	3.2	3RT2015	7	#	2.2 ... 3.2
1.5	3.2	3RV2011-1EA10	4	3RT2015	7	#	2.8 ... 4
2.2	4.8	3RV2011-1GA10	6.3	3RT2024	12	#	4.5 ... 6.3
3.7	7.4	3RV2011-1HA10	8	3RT2024	12	#	5.5 ... 8
4	8.5	3RV2011-1JA10	10	3RT2024	12	#	7 ... 10
5.5	11.5	3RV2011-1KA10	12.5	3RT2024	12	#	9 ... 12.5
7.5	15	3RV2011-4AA10	16	3RT2026	25	#	10 ... 16
11	21	3RV2021-4DA10	25	3RT2027	32	#	20 ... 25
15	29	3RV2021-4EA10	32	3RT2027	32	#	27 ... 32
18.5	34	3RV2031-4UA10	40	3RT2035	40	#	32 ... 40
22	40	3RV2032-4VA10	45	3RT2036	50	#	35 ... 45
30	57	3RV2031-4JA10	65	3RT2037	65	#	54 ... 65
37	64	3RV2031-4KA10	73	3RT2038	80	#	62 ... 73
45	77	3RV2031-4RA10	80	3RT2038	80	#	70 ... 80
55	101	3VA1112-5MH32-0AA0	125	3RT1054	115	3RU2156-5CB10-8K	90 ... 125
75	134	3VA1216-5MH32-0AA0	160	3RT1055	150	3RU2156-5DB10-8K	110 ... 160
90	160	3VA1220-5MH32-0AA0	200	3RT1056	185	3RU2156-5EB10-8K	140 ... 200
110	190	3VA1325-5MH32-0AA0	250	3RT1064	225	3RU2166-5FB10-8K	180 ... 250
132	228	3VA1325-5MH32-0AA0	250	3RT1065	265	3RU2166-5FB10-8K	180 ... 250
160	269	3VA1332-5MH32-0AA0	320	3RT1066	300	3RU2166-5GB10-8K	220 ... 320
200	350	3VA1440-5MH32-0AA0	400	3RT1075	400	3RU2176-5HB10-8K	280 ... 400
250	430	3VA1450-5MH32-0AA0	500	3RT1076	500	3RU2176-5JB10-8K	350 ... 500

§ 3RV11 / 3RV21 'relay function' motor protection circuit-breaker can also be used in place of 3RV10 / 3RV20 motor protection circuit-breaker respectively

3RV10 / 3RV20 comes with in-built overload protection, hence external bi-relay is eliminated

Suitable for IE2/IE3/IE4 Motors

Star-Delta feeder, for Low LCC

SL motor			Circuit breaker§		Contactor line/delta		Contactor star		Bi-relay		Timer
kW 415V, 3ph, 50/60 Hz	I _L Amps	I _{Ph} Amps	Type	Rating Amps	Type	Rating Amps	Type	Rating Amps	Type	Set-Range Amp	Type
5.5	11.5	6.7	3RV2321-4AC10	16	3RT2026	25	3RT2015	7	3RU2126-1HB0	5.5 - 8	3RP15
7.5	15.5	8.7	3RV2321-4AC10	16	3RT2026	25	3RT2015	7	3RU2126-1JB0	7-10	3RP15
11	22	12.2	3RV2321-4DC10	25	3RT2027	32	3RT2024	12	3RU2126-4AB0	11...16	3RP15
15	29	16.8	3RV2321-4EC10	32	3RT2027	32	3RT2024	12	3RU2126-4BB0	14 ... 20	3RP15
18.5	35	19.7	3RV2332-4UC10	40	3RT2035	40	3RT2027	32	3RU2136-4DB0	18 ... 25	3RP15
22	41	23.2	3RV2332-4VC10	45	3RT2036	50	3RT2027	32	3RU2136-4EB0	22 ... 32	3RP15
30	55	33.1	3RV2332-4JC10	65	3RT2037	65	3RT2035	40	3RU2136-4FB0	28 ... 40	3RP15
37	66	37.1	3RV2332-4KC10	73	3RT2038	80	3RT2035	40	3RU2136-4GB0	36 ... 45	3RP15
45	80	44.7	3RV2332-4RC10	80	3RT2038	80	3RT2035	40	3RU2136-4HB0	40 ... 50	3RP15
55	97	58.6	3VA1112-5MH32-0AA0	125	3RT2045	80	3RT2036	50	3RU2146-4JB0	45 ... 63	3RP15
75	134	77.7	3VA1216-5MH32-0AA0	160	3RT1054	115	3RT2037	65	3RU2156-5BB10-8K	70 ... 100	3RP15
90	156	90.5	3VA1220-5MH32-0AA0	200	3RT1055	150	3RT2038	80	3RU2156-5BB10-8K	70 ... 100	3RP15
110	190	110.2	3VA1325-5MH32-0AA0	250	3RT1056	185	3RT2046	95	3RU2156-5CB10-8K	90 ... 125	3RP15
132	228	132.2	3VA1325-5MH32-0AA0	250	3RT1056	185	3RT1054	115	3RU2156-5DB10-8K	110 ... 160	3RP15
160	269	156	3VA1332-5MH32-0AA0	320	3RT1064	225	3RT1054	115	3RU2166-5EB10-8K	140 ... 200	3RP15
200	350	203	3VA1440-5MH32-0AA0	400	3RT1065	265	3RT1056	185	3RU2166-5FB10-8K	180 ... 250	3RP15
250	430	249	3VA1450-5MH32-0AA0	500	3RT1066	300	3RT1064	225	3RU2166-5GB10-8K	220 ... 320	3RP15

** Starting current up to 780A

Fuse protected selection type 2, I_q = 50kA, IS/IEC:60947-4-1 (3KL with 3RT & 3RU)

Suitable for IE2 motors

- The selection is valid only for complete Siemens combinations i.e. SDF + DIN Fuse + Contactor + Birelay (+ timer).
- In case this combination is changed to accommodate another brand/rating of SDF/DIN Fuse/Contactor/BMR, it shall be the responsibility of the person making such a change to assure type 2 performance.
- Selection is for normal starting conditions (class 10 feeder). (For heavy starting applications e.g. ID/FD fans, reciprocating compressor, ball mills etc., please consult Siemens.)
- The electronic star-delta timer type 3RP should be used in star-delta feeders.
- SDF: Switch Disconnecter Fuse. All fuses are DIN HRC type.
- Tested Type 2 combinations
- Low LCC = Low Life Cycle Cost

Direct-on-line feeder, for Low LCC

SL Motor		SDF		Fuse		Contactor		Bi-Relay	
kW 415V, 3ph, 50/60 Hz	I _L Amps	Type	Amp	Type	Amps	Type	Rating Amps	Type	Set-Range Amp
0.37	1.1	3KL811	20	3NA78040RC	4	3RT2015	7	3RU2116-0KB0	0.9 ... 1.25
0.55	1.4	3KL811	20	3NA78040RC	4	3RT2015	7	3RU2116-1AB0	1.1 ... 1.6
0.75	1.7	3KL811	20	3NA78010RC	6	3RT2015	7	3RU2116-1BB0	1.4 ... 2
1.1	2.4	3KL811	20	3NA78010RC	6	3RT2015	7	3RU2116-1DB0	2.2 ... 3.2
1.5	3.2	3KL811	20	3NA78030RC	10	3RT2015	7	3RU2116-1EB0	2.8 ... 4
2.2	4.8	3KL811	20	3NA78050RC	16	3RT2015	7	3RU2116-1GB0	4.5 ... 6.3
3.7	7.4	3KL811	20	3NA78070RC	20	3RT2024	12	3RU2126-1JB0	7 ... 10
5.5	11.2	3KL812	32	3NA78100RC	25	3RT2024	12	3RU2126-1KB0	9 ... 12.5
7.5	15	3KL812	32	3NA78120RC	32	3RT2025	17	3RU2126-4AB0	11 ... 16
11	21	3KL815	63	3NA78200RC	50	3RT2027	32	3RU2126-4DB0	20 ... 25
15	28	3KL815	63	3NA78220RC	63	3RT2035	40	3RU2136-4EB0	22 ... 32
18.5	34	3KL821	100	3NA78240RC	80	3RT2035	40	3RU2136-4FB0	28 ... 40
22	40	3KL821	100	3NA78240RC	80	3RT2036	50	3RU2136-4GB0	36 ... 45
30	57	3KL821	100	3NA78300RC	100	3RT2037	65	3RU2136-4QB0	47 ... 57
37	64	3KL822	125	3NA78320RC	125	3RT2038	80	3RU2136-4KB0	62 ... 73
45	77	3KL822	125	3NA78320RC	125	3RT2046	95	3RU2136-4RB0	70 ... 80
55	101	3KL823	160	3NA78360RC	160	3RT1054	115	3RU2156-5CB10-8K	90 ... 125
75	134	3KL831	200	3NA71400RC	200	3RT1055	150	3RU2156-5DB10-8K	110 ... 160
90	160	3KL832	250	3NA71440RC	250	3RT1056	185	3RU2156-5EB10-8K	140 ... 200
110	190	3KL832	250	3NA71440RC	250	3RT1064	225	3RU2166-5FB10-8K	180 ... 250
132	228	3KL833	315	3NA72520RC	315	3RT1065	265	3RU2166-5FB10-8K	180 ... 250
160	269	3KL834	400	3NA72600RC	400	3RT1066	300	3RU2166-5GB10-8K	220 ... 320
200	350	3KL841	500	3NA33650RC	500	3RT1075	400	3RU2176-5HB10-8K	280 ... 400
250	430	3KL841	500	3NA33650RC	500	3RT1076	500	3RU2176-5JB10-8K	350 ... 500

Star-Delta feeder, for Low LCC

SL Motor			SDF		HRC Fuses		Contactor Line/Delta		Contactor Star		Bi-Relay		Timer
kW 415V, 3ph, 50/60 Hz	I _L Amps	I _{Ph} Amps	Type	Rating Amps	Type	Rating Amps	Type	Rating Amps	Type	Rating Amps	Type	Set-Range Amp	Type
4	7.8	4.5	3KL811	20	3NA78030RC	10	3RT2023	9	3RT2023	9	3RU2126-1FB0	3.5 ... 5	3RP15
5.5	11.2	6.5	3KL811	20	3NA78050RC	16	3RT2023	9	3RT2023	9	3RU2126-1HB0	5.5 ... 8	3RP15
7.5	15	9.2	3KL811	20	3NA78070RC	20	3RT2024	12	3RT2023	9	3RU2126-1JB0	7 ... 10	3RP15
11	21	12	3KL812	32	3NA78100RC	25	3RT2025	17	3RT2023	9	3RU2126-1KB0	9 ... 12.5	3RP15
15	28	16.2	3KL812	32	3NA78120RC	32	3RT2026	25	3RT2025	17	3RU2126-4BB0	14 ... 20	3RP15
18.5	34	19.7	3KL815	63	3NA78200RC	50	3RT2027	32	3RT2026	25	3RU2126-4CB0	17 ... 22	3RP15
22	40	23.2	3KL815	63	3NA78200RC	63	3RT2035	40	3RT2026	25	3RU2136-4DB0	18 ... 25	3RP15
30	57	30.6	3KL821	100	3NA78220RC	80	3RT2035	40	3RT2026	25	3RU2136-4EB0	22 ... 32	3RP15
37	64	37.5	3KL821	100	3NA78240RC	80	3RT2035	40	3RT2027	32	3RU2136-4FB0	28 ... 40	3RP15
45	77	45	3KL821	100	3NA78300RC	100	3RT2037	65	3RT2028	40	3RU2136-4HB0	40 ... 50	3RP15
55	101	55.4	3KL821	100	3NA78300RC	100	3RT2037	65	3RT2035	40	3RU2136-4JB0	54 ... 65	3RP15
75	134	75.6	3KL823	160	3NA78360RC	160	3RT2038	80	3RT2037	65	3RU2136-4RB0	70 ... 80	3RP15
90	156	90	3KL823	160	3NA78360RC	160	3RT2046	95	3RT2038	80	3RU2146-4LB0	70 ... 90	3RP15
110	190	113	3KL831	200	3NA71400RC	200	3RT1054	115	3RT1054	115	3RU2156-5CB10-8K	90 ... 125	3RP15
132	228	133	3KL832	250	3NA71440RC	250	3RT1055	150	3RT1054	115	3RU2156-5DB10-8K	110 ... 160	3RP15
160	269	162	3KL833	315	3NA72520RC	315	3RT1056	185	3RT1054	115	3RU2156-5EB10-8K	140 ... 200	3RP15
200	350	202	3KL834	400	3NA72600RC	400	3RT1064	225	3RT1056	185	3RU2166-5FB10-8K	180 ... 250	3RP15
250	430	248	3KL841	500	3NA33650RC	500	3RT1075	400	3RT1065	265	3RU2166-5GB10-8K	220 ... 320	3RP15

Available till stocks last

Power Contactors - SICOP 3TF

Size	Rated current (A) Ie AC3 upto 415V	Motor kW at 415V 50Hz, 3ph	AC 50 Hz coil (LPs for 110, 230, 415V)			
			Auxiliary contacts	Type Pl. fill in coil voltage code	Unit LP ₹	Std. pkg. (nos.)
12	475	250	2NO+2NC ⁵	■ 3TF5702-0C..	144560.-	1

Spares for SICOP and SICON^{Plus} Contactors

SICOP main contact kits (set of 6 fixed & 3 moving contacts)

For Contactor (AC3 Rating)	Type	LP per set ₹	Std. pkg. (nos.)
3TF57 (475A)	3TY7570-0YA	52735.-	1

SICOP arc chambers

For Contactor	Type	Unit LP ₹	Std. pkg. (nos.)
3TF57	3TY7572-0YA	6080.-	1

AC coils (50 Hz)

For contactor	Type†	Unit LP ₹		Std. pkg. (nos.)
		For 110/230/415V 50Hz	For all other coil voltages	
3TF57	3TY7573-0C..	24015.-	NA	1

AC coils 50/60 Hz coil code: 3TF57

Coil Voltage (V)	110-132	■ 220-240	380-460
Code	F7	M7	Q7

Motor protection circuit breakers - 3VU

MPCBs for motor and plant protection

Overload release range A	Type (w/o aux. contact)	Unit LP ₹	Type (with 1NO+1NC)	Unit LP ₹	Std. pkg. (nos.)
0.1 - 0.16	3VU1340-0MB00	8130.-	3VU1340-1MB00	9765.-	1
0.16 - 0.24	3VU1340-0MC00		3VU1340-1MC00		1
0.24 - 0.4	3VU1340-0MD00		3VU1340-1MD00		1
0.4 - 0.6	3VU1340-0ME00	9450.-	■ 3VU1340-1ME00	11100.-	1
0.6 - 1	3VU1340-0MF00		■ 3VU1340-1MF00		1
1 - 1.6	3VU1340-0MG00	9530.-	■ 3VU1340-1MG00	11170.-	1
1.6 - 2.4	3VU1340-0MH00		■ 3VU1340-1MH00		1
2 - 3.2	3VU1340-0NH00	9975.-	■ 3VU1340-1NH00	11415.-	1
2.4 - 4	3VU1340-0MJ00		■ 3VU1340-1MJ00		1
3.2 - 5	3VU1340-0NJ00		■ 3VU1340-1NJ00		1
4 - 6	3VU1340-0MK00		■ 3VU1340-1MK00		1
5 - 8	3VU1340-0NK00		■ 3VU1340-1NK00		1
6 - 10	3VU1340-0ML00		■ 3VU1340-1ML00		1
8 - 13	3VU1340-0NL00	11575.-	■ 3VU1340-1NL00	13000.-	1
10 - 16	3VU1340-0MM00	11575.-	■ 3VU1340-1MM00	13000.-	1
14 - 20	3VU1340-0MN00	11790.-	■ 3VU1340-1MN00	13245.-	1
18 - 25	3VU1340-0MP00	13655.-	■ 3VU1340-1MP00	15100.-	1
6 - 10	3VU1640-0ML00	21250.-	■ 3VU1640-1ML00	22620.-	1
10 - 16	3VU1640-0MM00	21250.-	■ 3VU1640-1MM00	22620.-	1
16 - 25	3VU1640-0MN00	25810.-	■ 3VU1640-1MN00	27230.-	1
22 - 32	3VU1640-0MP00	25810.-	■ 3VU1640-1MP00	27230.-	1
28 - 40	3VU1640-0MQ00	27700.-	■ 3VU1640-1MQ00	29105.-	1
36 - 52	3VU1640-0MR00	27700.-	■ 3VU1640-1MR00	29105.-	1
45 - 63 [#]	3VU1640-0LS00	32940.-	3VU1640-1LS00	35795.-	1

Circuit-breakers for plant protection

Circuit breakers with aux. 1NO+1NC, for fuse monitoring

Rated current In A	Overload release range A	Shortcircuit release setting A	Type	Unit LP ₹	Std. pkg. (nos.)
0.2	0.2	1.2	■ 3VU1340-1MS00	9765.-	1

Accessories for 3VS/3VU

Description	Version	Type	Unit LP ₹	Std. pkg. (nos.)
50 kA current limiter for 3VS13/3VU13 only	Rated current = 56 A aux contacts 1NO+1NC	3VU9138-2AB00	13100.-	1

3TS Converter duty Contactors

Contactor Size	Rated current Ie (A) AC1 at 415V	AC Coil		
		Type	Unit LP ₹	Std. pkg. (nos.)
12	630	3TS5722-0C..1-8K*	98965.-	1

Spares for 3TS Contactors

Converter Duty

Main contact kits (set of 6 fixed & 3 moving contacts)

Contactor rating	Description	Type*	Unit LP ₹	Std. pkg. (nos.)
3TS57	Spare main contact kits	3TS9157-01-8K	44035.-	1

Spare coils

	AC Coil	Unit LP ₹
3TS57	3TY7573-0C..	24015.-

for 3TS57

AC 50/60Hz	Coil voltage (V)	110-132	220-240
	Code	F7	M7

* 3TS57 - Suitable for AC-1 applications. For frequency converter applications refer to the nearest Siemens office

Circuit breakers with aux. 1NO+1NC, for line-side protection of transformers with high inrush current

Rated current In A	Overload release range A	Shortcircuit release setting A	Type	Unit LP ₹	Std. pkg. (nos.)
0.6	0.4 - 0.6	12	3VU1340-1TE00	14900.-	1
1	0.6 - 1	15	3VU1340-1TF00		1
1.6	1 - 1.6	29	3VU1340-1TG00		1
2.4	1.6 - 2.4	48	3VU1340-1TH00		1
4	2.4 - 4	72	3VU1340-1TJ00		1
6	4 - 6	120	3VU1340-1TK00		1
10	6 - 10	190	3VU1340-1TL00		1
16	10 - 16	300	3VU1340-1TM00		1
20	14 - 20	300	3VU1340-1TN00		1

Available till stocks last



3RW40

From 75 - 250 kW

- Soft start, soft stop, adjustable current limit.
- Integrated bypass contact system
- Integrated microprocessor based overload relay with adjustable trip class 10/15/20.
- Intrinsic device protection to protect against thermal overloading of thyristors.
- Integrated state and fault monitoring
- Innovative 2-phase "Polarity Balancing" operation



3RW44

From 22 - 1200 kW

- Coated Circuit board for better withstanding in harsh environments
- Torque control, Adjustable current limiting
- Graphical display (LCD) with background illumination
- Optional communication modules (PROFINET/PROFIBUS DP)
- Programmable 4 inputs and 3 outputs.
- Integrated motor overload protection with adjustable trip class 5/10/15/20/30 and device self-protection
- Integrated bypass contact system
- Integrated state and fault monitoring
- Standard circuit (in-line) and inside-the-delta circuit
- Creep speed / inching mode / brake function

3RW40: for standard applications

Rated operating voltage U_e , in line circuit V AC	Motor rating at 415V, 40°C, normal starting, in line circuit kW	Rated operating current I_e (AC-53a) A (40°C/50°C/60°C)	Type	Unit LP ₹	Std. pkg. (nos)
200...460	75	134 / 117 / 100	3RW4055-6BB†4	263165.-	1
200...460	90	162 / 145 / 125	3RW4056-6BB†4	325100.-	1
200...460	132	230 / 205 / 180	3RW4073-6BB†4	371530.-	1
200...460	160	280 / 248 / 215	3RW4074-6BB†4	448950.-	1
200...460	200	356 / 315 / 280	3RW4075-6BB†4	516005.-	1
200...460	250	432 / 385 / 335	3RW4076-6BB†4	564395.-	1

† Control voltage code:

• 115V AC 3

• 230V AC 4

3RW44: for heavy duty applications

Rated operating voltage U_e , in line circuit V AC	Motor rating at 415V, 40°C, normal starting, (in line circuit) kW	Motor rating at 415V, 40°C, normal starting, (in delta circuit) kW	Rated operating current I_e (AC-53a) A (40°C/50°C/60°C)	Type*	Unit LP ₹	Std. pkg. (nos)
200...460	15	22	29 / 26 / 23	3RW4422-1BC\$4	149920.-	1
200...460	18.5	30	36 / 32 / 29	3RW4423-1BC\$4	176700.-	1
200...460	22	45	47 / 42 / 37	3RW4424-1BC\$4	187405.-	1
200...460	30	55	57 / 51 / 45	3RW4425-1BC\$4	224870.-	1
200...460	37	75	77 / 68 / 59	3RW4426-1BC\$4	267720.-	1
200...460	45	90	98 / 82 / 72	3RW4427-1BC\$4	337305.-	1
200...460	55	110	113 / 100 / 88	3RW4434-6BC\$4	390855.-	1
200...460	75	132	134 / 117 / 100	3RW4435-6BC\$4	428360.-	1
200...460	90	160	162 / 145 / 125	3RW4436-6BC\$4	442150.-	1
200...460	110	200	203 / 180 / 156	3RW4443-6BC\$4	457085.-	1
200...460	132	250	250 / 215 / 185	3RW4444-6BC\$4	496255.-	1
200...460	160	315	313 / 280 / 250	3RW4445-6BC\$4	535425.-	1
200...460	200	355	356 / 315 / 280	3RW4446-6BC\$4	631800.-	1
200...460	250	400	432 / 385 / 335	3RW4447-6BC\$4	718280.-	1
230...460	315	560	551 / 494 / 438	3RW4453-6BC\$4	1034340.-	1
230...460	355	630	615 / 551 / 489	3RW4454-6BC\$4	1368975.-	1
230...460	400	710	693 / 615 / 551	3RW4455-6BC\$4	1545425.-	1
230...460	450	800	780 / 693 / 615	3RW4456-6BC\$4	1703625.-	1
230...460	500	900	880 / 780 / 693	3RW4457-6BC\$4	1782720.-	1
230...460	560	1000	970 / 850 / 760	3RW4458-6BC\$4	1928735.-	1
230...460	630	1100	1076 / 970 / 880	3RW4465-6BC\$4	2226875.-	1
230...460	710	1200	1214 / 1076 / 970	3RW4466-6BC\$4	2525015.-	1

\$ Control voltage code:

• 115V AC 3

• 230V AC 4

– For 3RW44 with operating voltage U_e 400...600V AC Change the last digit of MLFB from "4" to "5" - Price on request.

– For 3RW44 with operating voltage U_e 400...690V AC: Change the last digit of MLFB from "4" to "6" - Price on request.

Accessories for 3RW44

Description	Type	Unit LP ₹	Std. pkg. (nos.)
Profibus communication module	3RW49000KC00	35500.-	1
Profinet communication module	3RW49000NC00	61235.-	1
External display and operating module	3RW49000AC00	32255.-	1

Note: Commissioning service is available at extra cost.

The Sirius 3RW30/40/44 soft starters are designed for normal starting conditions.

$J_{load} < 10 \times J_{motor}$

In the event of deviating conditions or higher switching frequency, it may be necessary to choose a larger unit.

Siemens recommends use of selection and simulation program
Simulation Tool for Soft Starters (STS).

LP - List Price

Description	Type	Unit LP ₹	Std. pkg. (nos.)
PC cable for PC/PG communication - USB connection	3UF79410AA00-0	15090.-	1
- Connection cable for external display module (0.5 mtr - flat)	3UF79320AA00-0	1880.-	1
- Connection cable for external display module (1 mtr - round)	3UF79370BA00-0	4755.-	1
- Connection cable for external display module (2.5 mtr - round)	3UF79330BA00-0	5115.-	1

Refer technical specifications for more details.

For more details, please visit: www.siemens.com/softstarter

Discontinued

Power Contactors - SICOP 3T1

DC Coil	
Auxiliary contacts	Type Pl. fill in coil voltage code
2NO + 2NC ⁵	3TF4602-0D..ZA01
2NO + 2NC ⁵	3TF4702-0D..ZA01
2NO + 2NC ⁵	3TF4702-0D..ZT00
2NO + 2NC ⁵	3TF4772-0D..
2NO + 2NC ⁵	3TF4822-0D..ZA01
2NO + 2NC ⁵	3TF4922-0D..ZA01
2NO + 2NC ⁵	3TF5002-0D..
2NO + 2NC ⁵	3TF5102-0D..
2NO + 2NC ⁵	3TF5202-0D..
2NO + 2NC ⁵	3TF5302-0D..
2NO + 2NC ⁵	3TF5402-0D..
2NO + 2NC ⁵	3TF5502-0D..
2NO + 2NC ⁵	3TF5602-0D..

Spares for SICOP and SICONT ^{Plus} Contactors

DC coils

For contactor	Type
3TF46/47/477	3TY7463-0D..
3TF48/49	3TY7483-0D..
3TF50/51	3TY7503-0D..
3TF52/53	3TY7523-0D..
3TF54/55	3TY7543-0D..
3TF56	3TY7563-0D..

Accessory of 3RT2 - Pneumatic delay blocks

Pneumatic delay blocks

for snapping onto the front of size S0 contactors

For Contactor	Function	Auxiliary contacts	Time setting range t Sec	Type
3RT2.2	ON-Delay	1NO + 1NC	0.1 ... 30	3RT2926-2PA01
			1 ... 60	3RT2926-2PA11
	OFF-Delay	1NO + 1NC	0.1 ... 30	3RT2926-2PR01
			1 ... 60	3RT2926-2PR11

Siemens Industry Online Support (SIOS)

Download mobile app



3RT1(S3) and Spare Coils

Size	AC-3 operational current I _e up to 415V A	Motor rating at 415V, 50Hz kW	Auxiliary contacts	AC Coil Type
3RT1 Size S3 Contactor				
S3	65	30	–	3RT1044-1A..08K
	80	37	–	3RT1045-1A..08K
	95	45	–	3RT1046-1A..08K

Magnetic coils for 3RT1 (S3)

Size	AC Coil		
	Contactor type	Rated control supply voltage U _c at 50/60 Hz V AC	Type
S3	3RT10 44	24V	3RT1944-5AC21
		110V	3RT1944-5AG21
		230V	3RT1944-5AL21
		400V	3RT1944-5AV01
	3RT10 45/46 3RT13 4. 3RT14 46 3RT15 4.	24V	3RT1945-5AC21
		110V	3RT1945-5AG21
		230V	3RT1945-5AL21
		400V	3RT1945-5AV01

Contacts with fixing parts

1 set = 3 moving and 6 fixed switching contacts with fixing parts

Size	Contactor type	Type
S3	3RT10 44	3RT1944-6A
	3RT10 45	3RT1945-6A
	3RT10 46	3RT1946-6A





Licensed
Partner

For
SIEPAN 8PU

SIEMENS

INDUSTRY 4.0

Welcome to the world of digitalization with LV Panels

Industry 4.0 is a name for the current trend of automation and data exchange in manufacturing technologies. It includes cyber-physical systems, the Internet of things, cloud computing and cognitive computing. Industry 4.0 creates what has been called a "smart factory".

SIEMENS LV Panels helps our customers stride into the new & exciting world of digitalization.

For more information call us on 1800 209 1800

For Life Cycle Support of Products, Systems and Solutions call us on
1800 209 0987

www.siemens.com/sivacon-details


SIEMENS

One point contact for your service needs


The comprehensive range of services from Siemens is sure to cover the needs of the most varied users.

We offer structured services, designed to give you valuable support in every phase during the lifecycle of your low voltage products and panels – from warranty support to suitable retrofit solutions.

Additionally we also provide Energy Management solutions and Technology upgrade solutions for your existing switchgear.

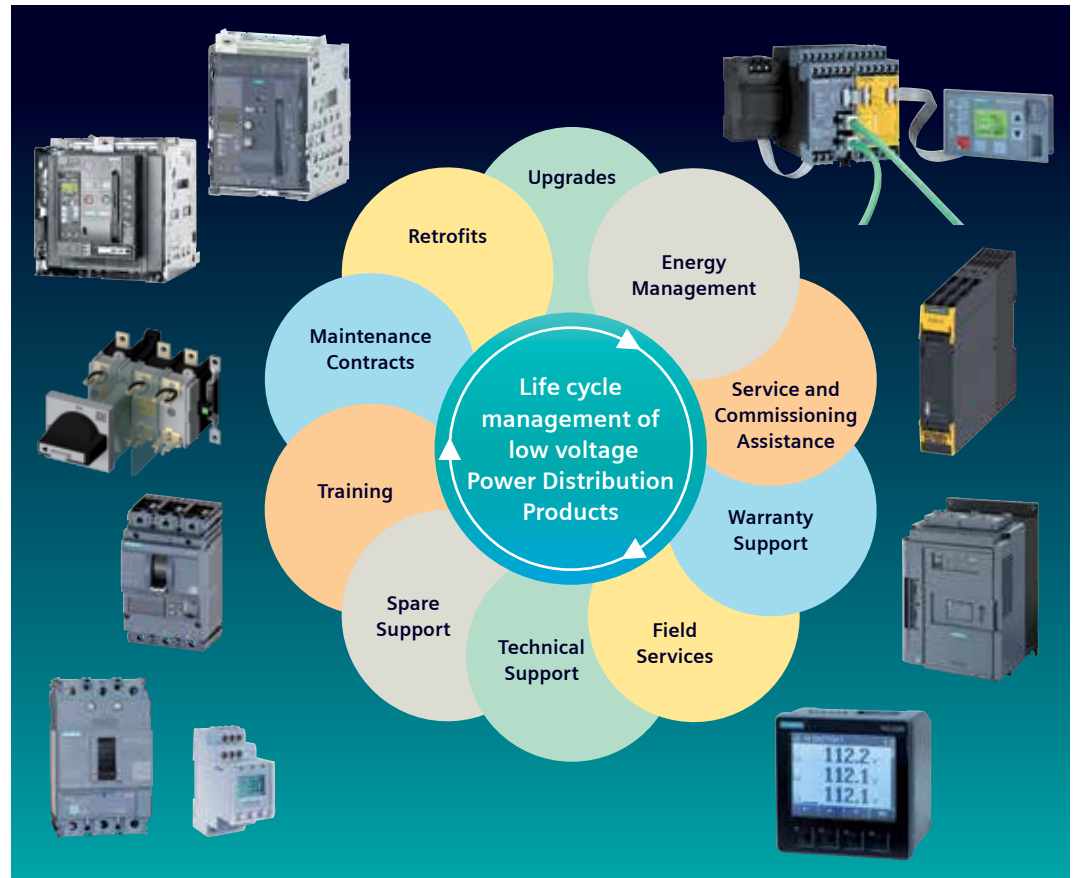

Service & spares for SIEPAN 8PU & SIRENEW (Solar ACDB) switchboards

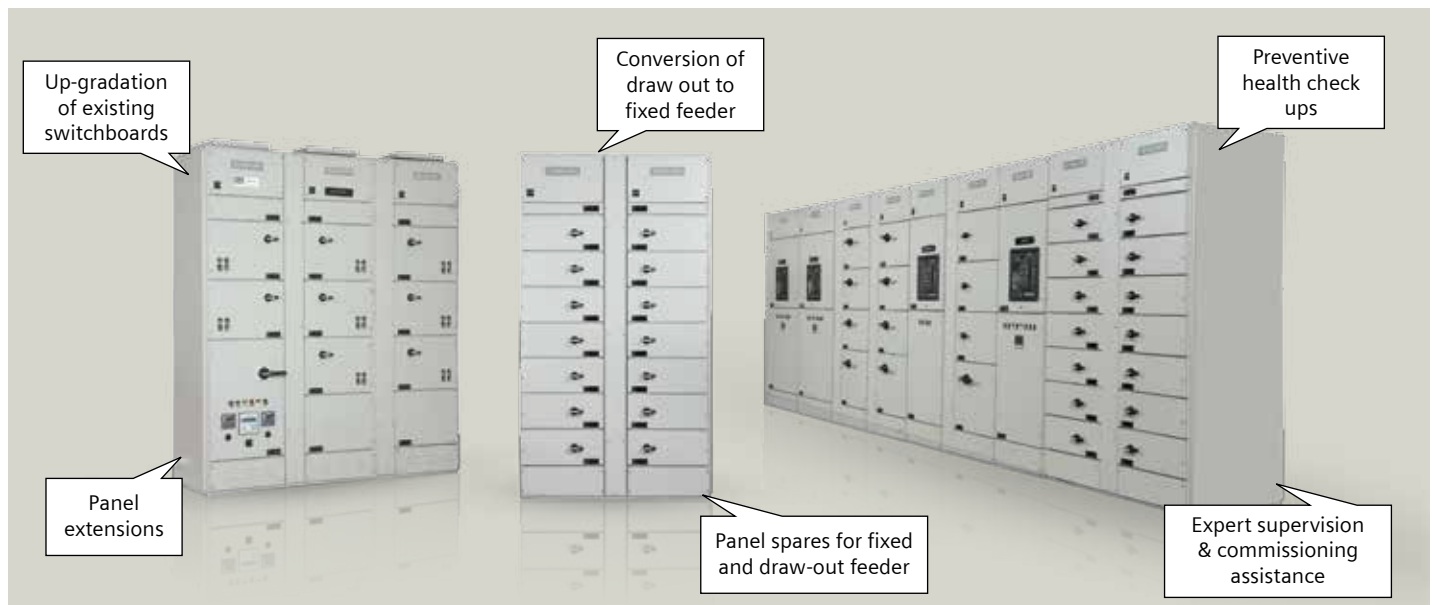

- Annual Maintenance contract of LV Switchboards
- Conversion of existing conventional to intelligent MCC
- Ready to use completely prewired draw out modules for MCC

Please get in touch with us for details

CUSTOMER CARE

Toll Free No: 1800220987/18002090987 • E-mail: ics.india@siemens.com

A comprehensive range of products, solutions and services



For information on prices of above products please refer to the valid low voltage power Distribution Products LP

Terms and conditions

Maximum Retail Price (MRP) / List Price (LP) is subject to revision without prior notice.

The company reserves the right to supply goods at its works or godown at its discretion.

The minimum order size for non-stock items (items not marked with ■) is 50 Nos. for each item or ₹ 50,000/- per item.

Export control regulation - retention clause: The fulfillment of the agreement on Siemens part is subject to the provision that this shall not be prevented by implements on the grounds of national and international legal requirements, in particular export control provision.

Stock items

The normal stock items (indicated by ■) are subject to change without prior notice.

Note

- This supersedes all previous Price Lists.
- List Prices (LPs) mentioned are exclusive of all taxes.
- Maximum Retail Prices (MRPs) mentioned in the publication are maximum recommended selling prices.
- Invoice amount not to exceed MRP
- Invoice amount = MRP (less) applicable discount + applicable GST %
- For receiving material in factory sealed packing, we request you to order in multiples of the indicated standard packing quantity.

Ask your nearest Siemens partners to include you in our mailing list.

Always make your purchases only from our authorised dealers. Details available with our sales office/territory managers.

LIST OF SITRAIN - INDIA TRAINING CENTERS

(including Training Service Providers, TSPs)

Code	Title	Location	Days
SIMATIC – Classic STEP 7, Industry 4.0 and Process Instrumentation			
AS-OL-400A	SIMATIC S7-400 with SIMATIC Manager (Advance Course)	Online Training	3 Days
DIGI-IN4.0	Introduction to Industry 4.0	Online Training	3 Days
AS-PI	Process Instrumentation	Online Training	4 Days
TIA Portal Courses			
AS-OL1500B	SIMATIC S7-1500 with TIA Portal V17 (Basic Course)	Online Training	5 Days
AS-1500B	SIMATIC S7-1500 with TIA V17 (Basic Course)	Siemens Ltd., Kalwa	5 Days
AS-1500A	SIMATIC S7-1500 with TIA V17 (Advance Course)	Siemens Ltd., Kalwa	5 Days
AS-OL1500A	SIMATIC S7-1500 with TIA Portal V17 (Advance Course)	Online Training	5 Days
AS-OL-WINT	SIMATIC WinCC SCADA (WinCC Prof) in the TIA Portal	Online Training	5 Days
AS-TIA150F	SIMATIC Distributed Safety on S7-1500F With TIA Portal **New**	Siemens Ltd., Kalwa	3 Days
Process Control System SIMATIC PCS 7			
AS-PCS7B	DCS: SIMATIC PCS 7 Basic	Siemens Ltd., Kalwa	10 Days
AS-PCS7A	DCS: SIMATIC PCS 7 Advance	Siemens Ltd., Kalwa	10 Days
AS-SFP	SIMATIC Fail-safe (Process Safety) Course **New**	Siemens Ltd., Kalwa	3 Days
Drive & Switchgear Technology			
AP-CRANE	Application Based Crane Training	Siemens Ltd., Kalwa	5 Days
DR-S120B	SINAMICS S120 Basic	Siemens Ltd., Kalwa	5 Days
DR-S120A	SINAMICS S120 Advance	Siemens Ltd., Kalwa	5 Days
DR-SIMOB	SIMOTION Basic	Siemens Ltd., Kalwa	5 Days
LV-SM	SIMOCODE AC-Motor Control	Siemens Ltd., Kalwa	3 Days
TIA-MC	Basics of Motion Control 1 in TIA Portal ** New**	Siemens Ltd., Kalwa	4 Days

Code	Title	Location	Days
COMBO Courses **New**			
CO-CLS3040	SIMATIC S7-300 & S7-400 with SIMATIC Manager	Online Training	6 Days
CO-300WIN	SIMATIC S7-300 and WinCC v7.x	Online Training	6 Days
CO-TIA1215	SIMATIC S7-1200 & S7-1500 with TIA Portal	Online Training	6 Days
CO-TIAS120	SIMATIC S7-1500 PLC & SINAMICS S120	Online Training	6 Days
CO-G12S12	SINAMICS G120 & S120 Drives with STARTER	Online Training	6 Days
Maintenance Focused Course **New**			
MFC-G13S12	SINAMICS G130 & S120	Siemens Ltd., Kalwa	5 Days
MFC-R70R80	DC DRIVE 6RA70 & 6RA80	Siemens Ltd., Kalwa	5 Days
MFC-S7400	SIMATIC S7-400 with SIMATIC Manager	Siemens Ltd., Kalwa	3 Days
MFC-S71500	SIMATIC S7-1500 with TIA Portal	Siemens Ltd., Kalwa	3 Days
Blended Training **New**			
BT-1500	Blended Training on SIMATIC S7 1500 with TIA Portal	Online Training	45 Hrs.

Kindly download the SITRAIN app on your mobile from following link for course details


- For Android users:
<https://play.google.com/store/apps/details?id=com.siemens.industry.onlinesupport>
- For Apple users:
<https://apps.apple.com/in/app/industry-online-support/id478868966>

SITRAIN Training in India

SITRAIN India (Kalwa)

Siemens Ltd.
TSDC, Kalwa Works
Opposite Airoli Railway Station
Thane Belapur Road, Airoli
Navi Mumbai - 400708, Maharashtra
Tel: +91-22-39663208
E-mail: customer.training.in@siemens.com



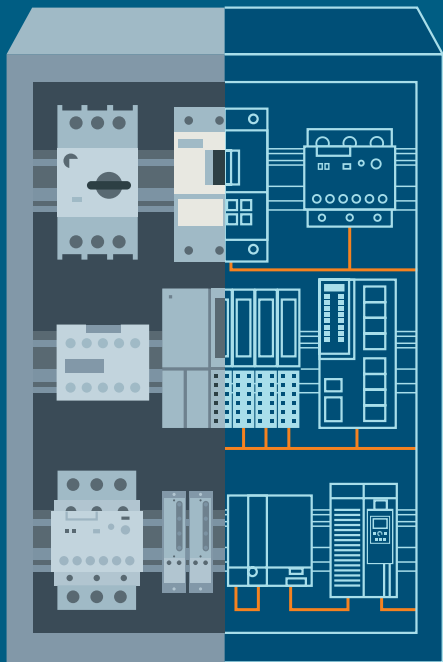


Integrated Control Panels

Working together for simple and stress-free control cabinet design

Would you like to save time and effort?


It is easy to optimize control cabinets in all aspects for machines & industrial systems for world market.

From preparation and dimensioning, to design, construction, service and support, we offer comprehensive support for control panel applications:




Expert know-how

The faster way to optimized control panels with practice-oriented expertise

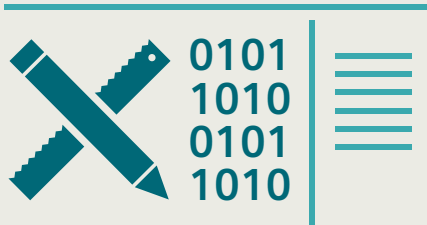

Tools & data for digitalization in engineering

Maximum efficiency for control panel design



Aligned product and system portfolio

Save time when building control panels

www.siemens.com/controlpanel

SIEMENS

Notes

Notes

Notes



SINOVA

Simply
Efficient

Low Voltage Electrical Products

SIEMENS

Your partners

Sales offices:

Ahmedabad
3rd Floor, Perna Arbour
Chimanlal Girdharlal Road, Navarangpura
Near Girish Colddrinks
Ahmedabad, Gujarat - 380009
Tel: +91 79 30927600
Fax: +91 79 30927699

Baroda
Ground Floor, Urja Bhavan
Maneja Works, Opp. Makarpura Railway Station
Vadodara - 390010
Tel: +91 265 3957701
Fax: +91 265 3039190

Bengaluru
1st Floor, Jyoti Mahal, No. 49, St. Marks Rd.
Bengaluru - 560 001
Tel: +91 80 33422000
Fax: +91 80 33424131

Bhubaneswar
Mobile: +91 8696222212
E-mail: rohit.nandan@siemens.com

Chandigarh
Mobile: +91 9888484066
E-mail: padam.sharma@siemens.com

Chennai
4th Floor, ETA Mount Central
Seethakathi Business Centre, Mount Road
Chennai - 600006
Tel: +91 44 30474000
Fax: +91 44 30474080

Coimbatore
Mobile: +91 9849001842
E-mail: pramod.krishna@siemens.com

Gurgaon
Plot No. 78, Tower - B
Jagatjit Industries Building (JIL)
Opposite SBI Academy, Sector-18
Gurgaon - 122015
Tel: +91 124 2842000, 3810200

Hyderabad
5-9-19, 4th Floor, Lakshmi Narasinh Estate
Hyderabad - 500004
Tel: +91 40 23482578

Jaipur
Mobile: +91 9815502480
E-mail: rohit.jagga@siemens.com

Jamshedpur
Mobile: +91 8294052647
E-mail: shyamal.bhattacharyya@siemens.com

Kolkata
3rd Floor, 43, Shanti Palli
Rashbihari Bypass Connector
Kolkata - 700042, India
Tel: +91 33 30939000
Fax: +91 33 30939010

Lucknow
Mobile: +91 9918002525
E-mail: atul.shukla@siemens.com

Mumbai
Business Centre-1, Kalwa Road
Thane Belapur Road
Thane - 400 601
Tel: +91 22 39663000
Fax: +91 22 39663721

Nagpur
Mobile: +91 9619413628
E-mail: sachin.shahane@siemens.com

Pune
Tower C, Panchshil Business Park
Survey No. 20, Balewadi
Pune - 411045
Tel: +91 20 30466000
Fax: +91 20 30466060

Vizag
Mobile: +91 9701354777
E-mail: vijaykiran.meduri@siemens.com

Territory managers:

Agra
Mobile: +91 8802011478
E-mail: singh.amar@siemens.com

Aurangabad
Shailendra Kumar Maurya
Flat 304, Ajinkya Palacia, Rajnagar MIDC
Bansilal Nagar, Aurangabad - 431005
Mobile: +91 9033563923
E-mail: shailendra-kumar.maurya@siemens.com

Belgaum
Plot No 11, Sharda Building Sahyadri Colony
Angol-Vadagnv Road, Belgaum - 590006
Mobile: +91 8105592066
E-mail: siddu.mareguddi@siemens.com

Bharuch
Bungalow No. 1, Sanskar Villa, Behind Yogi Petrol Pump
Narmada Chokdi, Zadeshwar, Bharuch - 392011
Mobile: +91 8884000998
E-mail: viral.kachhadia@siemens.com

Bhilai
Flat No. 408, 5th Floor, Harihar Nagar
Besa, Nagpur - 440037
Mobile: +91 7869922211
E-mail: pravin.deshbhatar@siemens.com

Bilaspur
House No. 63, Rohini Vihar, Phase-1
Near Agyey (Greenpark) Colony
Bilaspur (C.G.) - 495001
Mobile: +91 9827888436
E-mail: chandan.gajpalla@siemens.com

Boisar
Flat 110, Building M4, Tata Shubh Grih
Maan, Opp. D Mart, Boisar - 401506
Mobile: +91 9819231892
E-mail: debashis.biswas@siemens.com

Cochin
E27, Federal Park, Vennala P.O.
Cochin - 682028, Kerala
Mobile: +91 9447313241
E-mail: max.tom@siemens.com

Durgapur
Quarter No. C7, Kunustoria Area Complex
Near Pragati Stadium, Raniganj - 713362, West Bengal
Mobile: +91 9830317456
E-mail: harsh.chincholkar@siemens.com

Gandhidham
Plot No. 453, DC-5, Adipur, Gandhidham - 370205
Mobile: +91 9725005162
E-mail: mauilikkumar.patel@siemens.com

Goa
949/C, Gandhi Road, Backbhat, Raia
Salcete, Goa - 403720
Mobile: +91 9112633253
E-mail: vijaykumar.patil@siemens.com

Gorakhpur
Mobile: +91 9889384222
E-mail: umesh.pandey@siemens.com

Guwahati Assam
Shivalaya Housing Society, Flat No. B-3A
Bylane-4, Joymatinagar, Adabari, Pandu
Guwahati - 781012, Assam
Mobile: +91 9864110684
E-mail: biplob.datta@siemens.com

Haridwar
Mobile: +91 7983880015
E-mail: akshit.tyagi@siemens.com

Hosur
Mobile: +91 +91 9000451122
E-mail: chandrashekar.r@siemens.com

Hubli
Flat No. 303, Shriya Solitaire
Opp. Murudeshwar Ceramic Factory
RN Shetty Road, Hubli, Karnataka - 580024
Mobile: +91 9945961052
E-mail: kiran.kage@siemens.com

Hospet
Mahalakshmi Badavane 22nd Ward, 1st Cross
House No. C-5A, MP Prakash Nagar
Landmark - Behind Markandeswara Govt. School
Post: Hospet, Dist: Bellary, Karnataka - 583201
Mobile: +91 9945859004
E-mail: nagaraj.rk@siemens.com

Indore
78, Anand Nagar, Chitwad Road, Indore - 452001 (MP)
Mobile: +91 9673333024
E-mail: brajesh.rathor@siemens.com

Jalandhar
H.No. 212A, Punjabi Bahg Extension, 66 Feet Road
Near Curo Mall, Jalandhar, Punjab - 144022
Mobile: +91 9876047929
E-mail: sunil.singla@siemens.com

Jammu
Plot No. 592/3, 2nd Floor, Bhawani Vihar Extension
Trikuta Nagar, Jammu -180020
Mobile: +91 9873084776
E-mail: sharma.nikhil@siemens.com

Jodhpur
17 E 730 Chapasni H.B.Colony
Jodhpur - 342008, Rajasthan
Mobile: +91 8003088889
E-mail: ankur.pancholi@siemens.com

Kanpur
Plot No. 323, Flat No. 11, Ratan Lal Nagar
Kanpur, Uttar Pradesh - 208022
Mobile: +91 8802011478
E-mail: singh.amar@siemens.com

Kolhapur
Mobile: +91 9112633253
E-mail: vijaykumar.patil@siemens.com

Kota
A-1, 1st Floor, Shreenath Estate
Station Road, Kota, Rajasthan - 324002
Mobile: +91 9929110492
E-mail: rajendra.kabra@siemens.com

Ludhiana
House No. 548, FF Urban Estate, Phase 1, Jamalpur
Chandigarh Road, Ludhiana - 141003 Punjab
Mobile: +91 9872131762
E-mail: gurvinder.singh@siemens.com

Ludhiana
H.No. 1235, St. No. 3/1, Sardar Nagar, Rahon Road
Near Gurudwara Mata Bhagwanti
Ludhiana - 141007, Punjab
Mobile: +91 9872419990
E-mail: ravinder.pal@siemens.com

Madurai
Dhanya Block, DF-02, Vasuthara Enclave
84, TPK Main Road, Andal Puram
Madurai - 625003, Tamil Nadu
Mobile: +91 9626699692
E-mail: balaji.sakthivel@siemens.com

Mangalore
Grace, 3-4-433, Kadri Kambla Road, Bejai
Mangalore - 575004, India
Mobile: +91 9964070498
E-mail: vishaljenjen.dsouza@siemens.com

Meerut
110, Lotus Towers, Opposite Ansal Courtyard
Modipuram, Meerut - 250001, Uttar Pradesh
Mobile: +91 7983880015
E-mail: akshit.tyagi@siemens.com

Mehsana
Mobile: +91 9909904993
E-mail: piyush.thaker@siemens.com

Mysore
No. 980, 4th Cross, 6th Main, Bannimantap B layout
SS Nagar, Mysore - 570015
Mobile: +91 9611311645
E-mail: raashid.syed@siemens.com

Naidupeta
110/21, 3rd Street, Kalpaga Nagar, Padianallur
Redhills, Chennai - 600052
Mobile: +91 8122072921
E-mail: m.karthikeyan@siemens.com

Nashik
Flat No. 301, "A" Wing, Hari Shrushti, Near Jogging Track
Opposite WNS Indira Nagar, Nashik - 422009
Mobile: +91 9892292275
E-mail: dhananjay.thorat@siemens.com

Neemrana
F 131, Japanese Zone, Anant Raj Apartments
Neemrana, Alwar, Rajasthan - 301705, India
Mobile: +91 9855526122
E-mail: kumar.manish@siemens.com

Patna
A-53, 5th Floor, Krishna Apartment
Boring Road, Patna - 800001
Mobile: +91 9641574289
E-mail: rajendra.mitra@siemens.com

Pondicherry
Door No. 102, Second Floor, Chellan Nagar, Main Road
Near Rainbow Nagar Park, Pondicherry - 605011
Mobile: +91 8939883966
E-mail: kolappan.c@siemens.com

Raipur
Jr.M.I.G 503 Chilpy Height, Bhawna Nagar
Near Shankar Nagar, Raipur - 492007
Mobile: +91 9926511479
E-mail: ravindra.ughade@siemens.com

Rajahmundry
D No. 8-23-2, Flat No. G2, Sri Lalitha Heights, 1st Floor
Jammalamadaka Vari Street, Gandhinagar
Kakinada-533004
Mobile: +91 9642351144
E-mail: venkateshwar.d@siemens.com

Ranchi
Raj Enclave, Flat No. 204, 2nd Floor
Kaju Bagan (Near DAV Hehal Jr. Section)
Piska More, P.S. Sukhdeenagar, Ranchi - 834005
Mobile: +91 9674011440
E-mail: sarkar.saikat@siemens.com

Renukoot
Plot No. 2, Ward No. 14, Near A1
Turra Chauraha, Pipri, Renukoot Dist.
Sonebhadra - 231221 (U.P.), Uttar Pradesh
Mobile: +91 9984500021
E-mail: kumardeepak@siemens.com

Rourkela
U4/8, Civil Town Ship, 3rd Lane, Rourkela - 769004
Mobile: +91 9861056581
E-mail: ashirbad.das@siemens.com

Rudrapur
Shanti Vihar Colony, Chatarpur Road
Opposite Dr. Pandey Hospital, Rudrapur - 263153
Distt. Udham Singh Nagar, Uttrakhand
Mobile: +91 9839174578
E-mail: girish.pandey@siemens.com

Salem
Sri Krishna Nivasam Apartment, B2, 2nd Floor
Vidya Ashramam Salai, Shankar Nagar, Salem - 636007
Mobile: +91 9952389893
E-mail: b.saravanan@siemens.com

Silvassa
Flat No. 306, Dream Heights, Besides Jama Masjid
Vapi Silvassa Road, Dunga, Vapi - 396193
Mobile: +91 987021215
E-mail: akif.qadeer@siemens.com

Sonipat
Flat No. - B1206, Max Height Dream Home, Kundli
Sonipat, Haryana - 131028
Mobile: +91 9650481919
E-mail: deepak.beniwal@siemens.com

Sriperumbudur
No. 36, 2nd Floor, Jayasri Nagar, Pattunool Chathiram
Sriperumbudur, Tamilnadu - 602105
Mobile: +91 9071161117
E-mail: mohanjay.v@siemens.com

Surat
A1-504, Shradha Flats, Near Swastik Villa, Pal
Surat - 395009
Mobile: +91 9879110276
E-mail: rahul.gangrade@siemens.com

Trichy
Flat No. 57, 2nd Floor, A Block, Bharat Citi Squares
5th Cross Extn, 1st Main Road, Ramalinga Nagar
Woraiyur Trichy - 620003
Mobile: +91 9840255185
E-mail: r.pradeep@siemens.com

Udaipur
H.No. 4, Humdo Ki Sehri, Near Badnor House
Udaipur - 313001
Mobile: +91 7073032555
E-mail: yogesh.ordia@siemens.com

Vapi
Flat No. 306, Dream Heights, Besides Jama Masjid
Vapi Silvassa Road, Dunga, Vapi - 396193
Mobile: +91 987021215
E-mail: akif.qadeer@siemens.com

Vapi
Flat No. 302, 3rd Floor, Samrajya-IV, Royal Residency
Gokul Vihar Township, Charwada Road, Taluka- Pardi
Dist. Valsad, Vapi - 396195
Mobile: +91 9825147957
E-mail: rohit.darji@siemens.com

Vijayawada
D No. 39-15-3, Datti Simhadri Street
Opp Taj Gateway Hotel, Labbipet, Vijayawada - 520010
Mobile: +91 9666368653
E-mail: ganesh.pillala@siemens.com

Siemens Limited
Smart Infrastructure
Electrical Products
R&D Technology Centre
Thane Belapur Road
Airoli Node, Navi Mumbai - 400708
For more information contact toll free 1800 209 1800
E-mail: lvsg-r-mktg.india@siemens.com

www.siemens.co.in

Order No.: 113556660
SI-EP-CC-CPPL-112022
(This replaces SI-EP-CC-CPPL-042022
dated 15th April, 2022)

Customer Care Toll free no. 1800 209 0987
Email: ics.india@siemens.com

Product upgradation is a continuous process. Hence, data in this pricelist is subject to change without prior notice. For the latest information, please get in touch with our Sales Offices.